



Complies with
EASA ATPL

Oxford

aviation academy

FOURTH
EDITION

SKILLS • FOR • FLIGHT

ATPL GROUND TRAINING SERIES

Flight Performance & Planning I

Mass & Balance



Performance



Complies with JAA/EASA ATPL syllabus



Created by



Suitable for students studying for the
ATPL Theoretical Examinations



Contains specimen examination and test questions and answers

6

© Oxford Aviation Academy (UK) Limited 2008
All Rights Reserved

This text book is to be used only for the purpose of private study by individuals and may not be reproduced in any form or medium, copied, stored in a retrieval system, lent, hired, rented, transmitted or adapted in whole or in part without the prior written consent of Oxford Aviation Academy.

Copyright in all documents and materials bound within these covers or attached hereto, excluding that material which is reproduced by the kind permission of third parties and acknowledged as such, belongs exclusively to Oxford Aviation Academy.

Certain copyright material is reproduced with the permission of the International Civil Aviation Organisation, the United Kingdom Civil Aviation Authority and the European Aviation Safety Agency (EASA).

This text book has been written and published as a reference work to assist students enrolled on an approved EASA Air Transport Pilot Licence (ATPL) course to prepare themselves for the EASA ATPL theoretical knowledge examinations. Nothing in the content of this book is to be interpreted as constituting instruction or advice relating to practical flying.

Whilst every effort has been made to ensure the accuracy of the information contained within this book, neither Oxford Aviation Academy nor the distributor gives any warranty as to its accuracy or otherwise. Students preparing for the EASA ATPL theoretical knowledge examinations should not regard this book as a substitute for the EASA ATPL theoretical knowledge training syllabus published in the current edition of 'CS-FCL 1 Flight Crew Licensing (Aeroplanes)' (the Syllabus). The Syllabus constitutes the sole authoritative definition of the subject matter to be studied in an EASA ATPL theoretical knowledge training programme. No student should prepare for, or is currently entitled to enter himself/herself for the EASA ATPL theoretical knowledge examinations without first being enrolled in a training school which has been granted approval by an EASA authorised national aviation authority to deliver EASA ATPL training.

Oxford Aviation Academy excludes all liability for any loss or damage incurred or suffered as a result of any reliance on all or part of this book except for any liability for death or personal injury resulting from Oxford Aviation Academy's negligence or any other liability which may not legally be excluded.

Cover Photograph: Airbus A380

Photographed by Gabriel Savit, for www.airteamimages.com

This edition distributed by Transair (UK) Ltd, Shoreham, England: 2008
Printed in Singapore by KHL Printing Co. Pte Ltd

Textbook Series

Book	Title	EASA Ref. No.	Subject
1	010 Air Law	010	
2	020 Aircraft General Knowledge 1	021 01	Airframes & Systems
		021 01 01-04	Fuselage, Wings & Stabilising Surfaces
		021 01 05	Landing Gear
		021 01 06	Flight Controls
		021 01 07	Hydraulics
		021 01 08-09	Air Systems & Air Conditioning
		021 01 10	Anti-icing & De-icing
		021 01 11	Fuel Systems
		021 04 00	Emergency Equipment
3	020 Aircraft General Knowledge 2	021 02	Electrics – Electronics
		021 02 01	Direct Current
		021 02 02	Alternating Current
		021 02 05	Basic Radio Propagation.
4	020 Aircraft General Knowledge 3	021 00	Powerplant
		021 03 01	Piston Engines
		021 03 02	Gas Turbines
5	020 Aircraft General Knowledge 4	022	Instrumentation
		022 01	Flight Instruments
		022 03	Warning & Recording
		022 02	Automatic Flight Control
		022 04	Power Plant & System Monitoring Instruments
6	030 Flight Performance & Planning 1	031	Mass & Balance
		032	Performance
7	030 Flight Performance & Planning 2	033	Flight Planning & Monitoring
8	040 Human Performance & Limitations	040	
9	050 Meteorology	050	
10	060 Navigation 1	061	General Navigation
11	060 Navigation 2	062	Radio Navigation
12	070 Operational Procedures	070	
13	080 Principles of Flight	080	
14	090 Communications	091	VFR Communications
		092	IFR Communications

Contents**MASS & BALANCE**

1. JAR-OPS 1 SUB PART J	1
2. DEFINITIONS AND CALCULATIONS	21
3. REVISION QUESTIONS	93

AIRCRAFT PERFORMANCE

1. INTRODUCTION.115
2. GENERAL PRINCIPLES - TAKE-OFF133
3. GENERAL PRINCIPLES - CLIMB AND DESCENT155
4. GENERAL PRINCIPLES - CRUISE219
5. GENERAL PRINCIPLES - LANDING259
6. SINGLE ENGINE CLASS B AIRCRAFT - TAKE OFF279
7. SINGLE ENGINE CLASS B - CLIMB.293
8. SINGLE ENGINE CLASS B - EN-ROUTE AND DESCENT299
9. SINGLE ENGINE CLASS B - LANDING311
10. MULTI-ENGINED CLASS B - TAKE OFF323
11. MULTI ENGINED CLASS B - EN-ROUTE AND DESCENT.335
12. MULTI-ENGINED CLASS B - LANDING343
13. CLASS A AIRCRAFT - TAKE OFF353
14. CLASS A: ADDITIONAL TAKE OFF PROCEDURES393
15. CLASS A: TAKE OFF CLIMB405
16. CLASS A: EN ROUTE421
17. CLASS A: LANDING.445
18. REVISION QUESTIONS455

CHAPTER ONE

**JAR-OPS 1 SUB PART J
(EXTRACT)**

Contents

QUESTIONS	13
ANSWERS	20

SUBPART J – MASS AND BALANCE

JAR-OPS 1.605 General

(See Appendix 1 to JAR-OPS 1.605)

(a) An operator shall ensure that during any phase of operation, the loading, mass and centre of gravity of the aeroplane complies with the limitations specified in the approved Aeroplane Flight Manual, or the Operations Manual if more restrictive.

(b) An operator must establish the mass and the centre of gravity of any aeroplane by actual weighing prior to initial entry into service and thereafter at intervals of 4 years if individual aeroplane masses are used and 9 years if fleet masses are used. The accumulated effects of modifications and repairs on the mass and balance must be accounted for and properly documented. Furthermore, aeroplanes must be reweighed if the effect of modifications on the mass and balance is not accurately known.

(c) An operator must determine the mass of all operating items and crew members included in the aeroplane dry operating mass by weighing or by using standard masses. The influence of their position on the aeroplane centre of gravity must be determined.

(d) An operator must establish the mass of the traffic load, including any ballast, by actual weighing or determine the mass of the traffic load in accordance with standard passenger and baggage masses as specified in JAR-OPS 1.620.

(e) An operator must determine the mass of the fuel load by using the actual density or, if not known, the density calculated in accordance with a method specified in the Operations Manual. (See IEM OPS 1.605(e).)

JAR-OPS 1.607 Terminology

(a) *Dry Operating Mass.* The total mass of the aeroplane ready for a specific type of operation excluding all usable fuel and traffic load. This mass includes items such as:

- (1) Crew and crew baggage;
- (2) Catering and removable passenger service equipment; and
- (3) Potable water and lavatory chemicals.

(b) *Maximum Zero Fuel Mass.* The maximum permissible mass of an aeroplane with no usable fuel. The mass of the fuel contained in particular tanks must be included in the zero fuel mass when it

JAR-OPS 1.607(b) (continued)

is explicitly mentioned in the Aeroplane Flight Manual limitations.

(c) *Maximum Structural Landing Mass.* The maximum permissible total aeroplane mass upon landing under normal circumstances.

(d) *Maximum Structural Take Off Mass.* The maximum permissible total aeroplane mass at the start of the take-off run.

[(e) *Passenger classification.*

(1) Adults, male and female, are defined as persons of an age of 12 years and above.

(2) Children are defined as persons of an age of two years and above but who are less than 12 years of age.

(3) Infants are defined as persons who are less than 2 years of age.]

[(f) *Traffic Load.* The total mass of passengers, baggage and cargo, including any non-revenue load.

JAR-OPS 1.610 Loading, mass and balance

An operator shall specify, in the Operations Manual, the principles and methods involved in the loading and in the mass and balance system that meet the requirements of JAR-OPS 1.605. This system must cover all types of intended operations.

JAR-OPS 1.615 Mass values for crew

(a) An operator shall use the following mass values to determine the dry operating mass:

(1) Actual masses including any crew baggage; or

(2) Standard masses, including hand baggage, of 85 kg for flight crew members and 75 kg for cabin crew members; or

(3) Other standard masses acceptable to the Authority.

(b) An operator must correct the dry operating mass to account for any additional baggage. The position of this additional baggage must be accounted for when establishing the centre of gravity of the aeroplane.

JAR-OPS 1.620 (continued)

JAR-OPS 1.620 Mass values for passengers and baggage

(a) An operator shall compute the mass of passengers and checked baggage using either the actual weighed mass of each person and the actual weighed mass of baggage or the standard mass values specified in Tables 1 to 3 below except where the number of passenger seats available is [less than 10. In such cases passenger mass may be established by use of a verbal statement by or on behalf of each passenger and adding to it a pre-determined constant to account for hand baggage and clothing (See AMC OPS 1.620(a)). The] procedure specifying when to select actual or standard masses and the procedure to be followed when using verbal statements must be included in the Operations Manual.

(b) If determining the actual mass by weighing, an operator must ensure that passengers' personal belongings and hand baggage are included. Such weighing must be conducted immediately prior to boarding and at an adjacent location.

(c) If determining the mass of passengers using standard mass values, the standard mass values in Tables 1 and 2 below must be used. The standard masses include hand baggage and the mass of any infant below 2 years of age carried by an adult on one passenger seat. Infants occupying separate passenger seats must be considered as children for the purpose of this sub-paragraph.

(d) *Mass values for passengers – 20 passenger seats or more*

(1) Where the total number of passenger seats available on an aeroplane is 20 or more, the standard masses of male and female in Table 1 are applicable. As an alternative, in cases where the total number of passenger seats available is 30 or more, the 'All Adult' mass values in Table 1 are applicable.

(2) For the purpose of Table 1, holiday charter means a charter flight solely intended as [an element of a holiday travel package. The holiday charter mass values apply provided that not more than 5% of passenger seats installed in the aeroplane are used for the non-revenue carriage of certain categories of passengers (See IEM OPS 1.620(d)(2)).]

Table 1

Passenger seats:	20 and more	30 and more	
	Male	Female	All adult
All flights except holiday charters	88 kg	70 kg	84 kg
Holiday charters	83 kg	69 kg	76 kg
Children	35 kg	35 kg	35 kg

(e) *Mass values for passengers – 19 passenger seats or less.*

(1) Where the total number of passenger seats available on an aeroplane is 19 or less, the standard masses in Table 2 are applicable.

(2) On flights where no hand baggage is carried in the cabin or where hand baggage is accounted for separately, 6 kg may be deducted from the above male and female masses. Articles such as an overcoat, an umbrella, a small handbag or purse, reading material or a small camera are not considered as hand baggage for the purpose of this sub-paragraph.

Table 2

Passenger seats	1 – 5	6 – 9	10 – 19
Male	104 kg	96 kg	92 kg
Female	86 kg	78 kg	74 kg
Children	35 kg	35 kg	35 kg

(f) *Mass values for baggage*

(1) Where the total number of passenger seats available on the aeroplane is 20 or more the standard mass values given in Table 3 are applicable for each piece of checked baggage. For aeroplanes with 19 passenger seats or less, the actual mass of checked baggage, determined by weighing, must be used.

(2) For the purpose of Table 3:

(i) Domestic flight means a flight with origin and destination within the borders of one State;

(ii) Flights within the European region means flights, other than Domestic flights, whose origin and destination are within the area specified in Appendix 1 to JAR-OPS 1.620(f); and

(iii) Intercontinental flight, other than flights within the European region, means a flight with origin and destination in different continents.

JAR-OPS 1.620(f)(2) (continued)

Table 3 – 20 or more passenger seats

Type of flight	Baggage standard mass
Domestic	11 kg
Within the European	13 kg region
Intercontinental	15 kg
All other	13 kg

(g) If an operator wishes to use standard mass values other than those contained in Tables 1 to 3 above, he must advise the Authority of his reasons and gain its approval in advance. He must also submit for approval a detailed weighing survey plan and apply the statistical analysis method given in Appendix 1 to JAR-OPS 1.620(g). After verification and approval by the Authority of the results of the weighing survey, the revised standard mass values are only applicable to that operator. The revised standard mass values can only be used in circumstances consistent with those under which the survey was conducted. Where revised standard masses exceed those in Tables 1–3, then such higher values must be used. (See IEM OPS 1.620(g).)

(h) On any flight identified as carrying a significant number of passengers whose masses, including hand baggage, are expected to exceed the standard passenger mass, an operator must determine the actual mass of such passengers by weighing or by adding an adequate mass increment. (See IEM OPS 1.620(h) & (i).)

(i) If standard mass values for checked baggage are used and a significant number of passengers check in baggage that is expected to exceed the standard baggage mass, an operator must determine the actual mass of such baggage by weighing or by adding an adequate mass increment. (See IEM OPS 1.620(h) & (i).)

(j) An operator shall ensure that a commander is advised when a non-standard method has been used for determining the mass of the load and that this method is stated in the mass and balance documentation.

JAR-OPS 1.625 Mass and balance documentation

(See Appendix 1 to JAR-OPS 1.625)

(a) An operator shall establish mass and balance documentation prior to each flight specifying the load and its distribution. The mass and balance documentation must enable the

JAR-OPS 1.625(a) (continued)

commander to [determine that the load and its distribution is such] that the mass and balance limits of the aeroplane are not exceeded. The person preparing the mass and balance documentation must be named on the document. The person supervising the loading of the aeroplane must confirm by signature that the load and its distribution are in accordance with the mass and balance documentation. This document must be acceptable to the commander, his acceptance being indicated by countersignature or equivalent. (See also JAR-OPS 1.1055(a)(12).)

(b) An operator must specify procedures for Last Minute Changes to the load.

(c) Subject to the approval of the Authority, an operator may use an alternative to the procedures required by paragraphs (a) and (b) above.

INTENTIONALLY LEFT BLANK

Appendix 1 to JAR-OPS 1.605(a)(2) (continued)

Appendix 1 to JAR-OPS 1.605
Mass and Balance – General

See JAR-OPS 1.605

(a) *Determination of the dry operating mass of an aeroplane*

(1) *Weighing of an aeroplane*

(i) New aeroplanes are normally weighed at the factory and are eligible to be placed into operation without reweighing if the mass and balance records have been adjusted for alterations or modifications to the aeroplane. Aeroplanes transferred from one JAA operator with an approved mass control programme to another JAA operator with an approved programme need not be weighed prior to use by the receiving operator unless more than 4 years have elapsed since the last weighing.

(ii) The individual mass and centre of gravity (CG) position of each aeroplane shall be re-established periodically. The maximum interval between two weighings must be defined by the operator and must meet the requirements of JAR-OPS 1.605(b). In addition, the mass and the CG of each aeroplane shall be re-established either by:

(A) Weighing; or

(B) Calculation, if the operator is able to provide the necessary justification to prove the validity of the method of calculation chosen,

whenever the cumulative changes to the dry operating mass exceed $\pm 0.5\%$ of the maximum landing mass or the cumulative change in CG position exceeds 0.5% of the mean aerodynamic chord.

(2) *Fleet mass and CG position*

(i) For a fleet or group of aeroplanes of the same model and configuration, an average dry operating mass and CG position may be used as the fleet mass and CG position, provided that the dry operating masses and CG positions of the individual aeroplanes meet the tolerances specified in sub-paragraph (ii) below. Furthermore, the criteria specified in sub-paragraphs (iii), (iv) and (a)(3) below are applicable.

(ii) *Tolerances*

(A) If the dry operating mass of any aeroplane weighed, or the

calculated dry operating mass of any aeroplane of a fleet, varies by more than $\pm 0.5\%$ of the maximum structural landing mass from the established dry operating fleet mass or the CG position varies by more than $\pm 0.5\%$ of the mean aerodynamic chord from the fleet CG, that aeroplane shall be omitted from that fleet. Separate fleets may be established, each with differing fleet mean masses.

(B) In cases where the aeroplane mass is within the dry operating fleet mass tolerance but its CG position falls outside the permitted fleet tolerance, the aeroplane may still be operated under the applicable dry operating fleet mass but with an individual CG position.

(C) If an individual aeroplane has, when compared with other aeroplanes of the fleet, a physical, accurately accountable difference (e.g. galley or seat configuration), that causes exceedance of the fleet tolerances, this aeroplane may be maintained in the fleet provided that appropriate corrections are applied to the mass and/or CG position for that aeroplane.

(D) Aeroplanes for which no mean aerodynamic chord has been published must be operated with their individual mass and CG position values or must be subjected to a special study and approval.

(iii) *Use of fleet values*

(A) After the weighing of an aeroplane, or if any change occurs in the aeroplane equipment or configuration, the operator must verify that this aeroplane falls within the tolerances specified in sub-paragraph (2)(ii) above.

(B) Aeroplanes which have not been weighed since the last fleet mass evaluation can still be kept in a fleet operated with fleet values, provided that the individual values are revised by computation and stay within the tolerances defined in sub-paragraph (2)(ii) above. If these individual values no longer fall

Appendix 1 to JAR-OPS 1.605(a)(2) (continued)

within the permitted tolerances, the operator must either determine new fleet values fulfilling the conditions of sub-paragraphs (2)(i) and (2)(ii) above, or operate the aeroplanes not falling within the limits with their individual values.

(C) To add an aeroplane to a fleet operated with fleet values, the operator must verify by weighing or computation that its actual values fall within the tolerances specified in sub-paragraph (2)(ii) above.

(iv) To comply with sub-paragraph (2)(i) above, the fleet values must be updated at least at the end of each fleet mass evaluation.

(3) *Number of aeroplanes to be weighed to obtain fleet values*

(i) If 'n' is the number of aeroplanes in the fleet using fleet values, the operator must at least weigh, in the period between two fleet mass evaluations, a certain number of aeroplanes defined in the Table below:

Number of aeroplanes in the fleet	Minimum number of weighings
2 or 3	n
4 to 9	$\frac{n + 3}{2}$
10 or more	$\frac{n + 51}{10}$

(ii) In choosing the aeroplanes to be weighed, aeroplanes in the fleet which have not been weighed for the longest time shall be selected.

(iii) The interval between 2 fleet mass evaluations must not exceed 48 months.

(4) *Weighing procedure*

(i) The weighing must be accomplished either by the manufacturer or by an approved maintenance organisation.

(ii) Normal precautions must be taken consistent with good practices such as:

(A) Checking for completeness of the aeroplane and equipment;

Appendix 1 to JAR-OPS 1.605(a)(4) (continued)

(B) Determining that fluids are properly accounted for;

(C) Ensuring that the aeroplane is clean; and

(D) Ensuring that weighing is accomplished in an enclosed building.

(iii) Any equipment used for weighing must be properly calibrated, zeroed, and used in accordance with the manufacturer's instructions. Each scale must be calibrated either by the manufacturer, by a civil department of weights and measures or by an appropriately authorised organisation within 2 years or within a time period defined by the manufacturer of the weighing equipment, whichever is less. The equipment must enable the mass of the aeroplane to be established [accurately. (See AMC to Appendix 1 to JAR OPS 1.605 para(a)(4)(iii).)]

(b) *Special standard masses for the traffic load.* In addition to standard masses for passengers and checked baggage, an operator can submit for approval to the Authority standard masses for other load items.

(c) *Aeroplane loading*

(1) An operator must ensure that the loading of its aeroplanes is performed under the supervision of qualified personnel.

(2) An operator must ensure that the loading of the freight is consistent with the data used for the calculation of the aeroplane mass and balance.

(3) An operator must comply with additional structural limits such as the floor strength limitations, the maximum load per running metre, the maximum mass per cargo compartment, and/or the maximum seating limits.

(d) *Centre of gravity limits*

(1) *Operational CG envelope.* Unless seat allocation is applied and the effects of the number of passengers per seat row, of cargo in individual cargo compartments and of fuel in individual tanks is accounted for accurately in the balance calculation, operational margins must be applied to the certificated centre of gravity envelope. In determining the CG margins, possible deviations from the assumed load distribution must be considered. If free seating is applied, the operator must introduce procedures to ensure corrective action by flight or cabin crew if extreme longitudinal seat selection occurs. The CG

Appendix 1 to JAR-OPS 1.605(d)(1) (continued)

margins and associated operational procedures, including assumptions with regard to passenger seating, must be acceptable to the Authority. (See IEM to Appendix 1 to JAR-OPS 1.605 subparagraph (d).)

(2) *In-flight centre of gravity.* Further to sub-paragraph (d)(1) above, the operator must show that the procedures fully account for the extreme variation in CG travel during flight caused by passenger/crew movement and fuel consumption/transfer.

INTENTIONALLY LEFT BLANK

INTENTIONALLY LEFT BLANK

Appendix 1 to JAR-OPS 1.620(f)
Definition of the area for flights within the European region

For the purposes of JAR-OPS 1.620(f), flights within the European region, other than domestic flights, are flights conducted within the area bounded by rhumb lines between the following points:

N7200	E04500
N4000	E04500
N3500	E03700
N3000	E03700
N3000	W00600
N2700	W00900
N2700	W03000
N6700	W03000
N7200	W01000
N7200	E04500

as depicted in Figure 1 below:

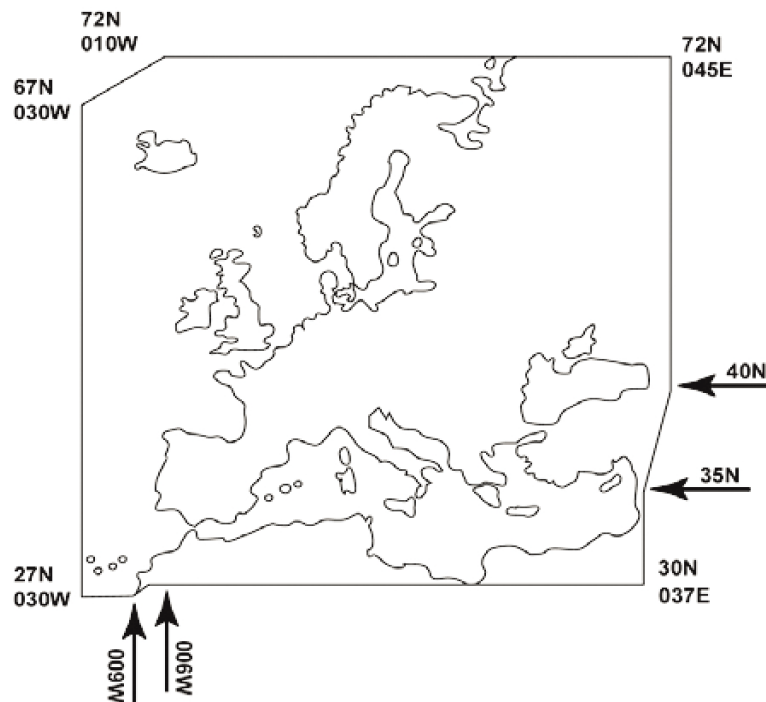


Figure 1 - European region

**Appendix 1 to JAR-OPS 1.620(g)
Procedure for establishing revised standard
mass values for passengers and baggage**

(See IEM to Appendix 1 to JAR-OPS 1.620 (g))

(a) *Passengers*

(1) *Weight sampling method.* The average mass of passengers and their hand baggage must be determined by weighing, taking random samples. The selection of random samples must by nature and extent be representative of the passenger volume, considering the type of operation, the frequency of flights on various routes, in/outbound flights, applicable season and seat capacity of the aeroplane.

(2) *Sample size.* The survey plan must cover the weighing of at least the greatest of:

(i) A number of passengers calculated from a pilot sample, using normal statistical procedures and based on a relative confidence range (accuracy) of 1% for all adult and 2% for separate male and female average masses (the statistical procedure, complemented with a worked example for determining the minimum required sample size and the average mass, is included in IEM OPS 1.620(g)); and

(ii) For aeroplanes:

(A) With a passenger seating capacity of 40 or more, a total of 2000 passengers; or

(B) With a passenger seating capacity of less than 40, a total number of 50 x (the passenger seating capacity).

[(3) *Passenger masses.* Passenger masses must include the mass of the passengers' belongings which are carried when entering the aeroplane. When taking random samples of passenger masses, infants shall be weighed together with the accompanying adult. (See also JAR-OPS 1.620(c)(d) and (e).)]

(4) *Weighing location.* The location for the weighing of passengers shall be selected as close as possible to the aeroplane, at a point where a change in the passenger mass by disposing of or by acquiring more personal belongings is unlikely to occur before the passengers board the aeroplane.

(5) *Weighing machine.* The weighing machine to be used for passenger weighing shall have a capacity of at least 150 kg. The mass shall be displayed at minimum graduations of 500 g.

The weighing machine must be accurate to within 0.5% or 200 g whichever is the greater.

(6) *Recording of mass values.* For each flight included in the survey, the mass of the passengers, the corresponding passenger category (i.e. male/female/children) and the flight number must be recorded.

(b) *Checked baggage.* The statistical procedure for determining revised standard baggage mass values based on average baggage masses of the minimum required sample size is basically the same as for passengers and as specified in sub-paragraph (a)(1) (See also IEM OPS 1.620(g)). For baggage, the relative confidence range (accuracy) amounts to 1%. A minimum of 2000 pieces of checked baggage must be weighed.

(c) *Determination of revised standard mass values for passengers and checked baggage*

(1) To ensure that, in preference to the use of actual masses determined by weighing, the use of revised standard mass values for passengers and checked baggage does not adversely affect operational safety, a statistical analysis (See IEM OPS 1.620(g)) must be carried out. Such an analysis will generate average mass values for passengers and baggage as well as other data.

(2) On aeroplanes with 20 or more passenger seats, these averages apply as revised standard male and female mass values.

(3) On smaller aeroplanes, the following increments must be added to the average passenger mass to obtain the revised standard mass values:

Number of passenger seats	Required mass increment
1 – 5 incl.	16 kg
6 – 9 incl.	8 kg
10 – 19 incl.	4 kg

Alternatively, all adult revised standard (average) mass values may be applied on aeroplanes with 30 or more passenger seats. Revised standard (average) checked baggage mass values are applicable to aeroplanes with 20 or more passenger seats.

(4) Operators have the option to submit a detailed survey plan to the Authority for approval and subsequently a deviation from the revised standard mass value provided this deviating value is determined by use of the procedure explained

in this Appendix. Such deviations must be reviewed at intervals not exceeding 5 years. (See AMC to Appendix 1 to JAR-OPS 1.620(g), subparagraph (c)(4).)

(5) All adult revised standard mass values must be based on a male/female ratio of 80/20 in respect of all flights except holiday charters which are 50/50. If an operator wishes to obtain approval for use of a different ratio on specific routes or flights then data must be submitted to the Authority showing that the alternative male/female ratio is conservative and covers at least 84% of the actual male/female ratios on a sample of at least 100 representative flights.

(6) The average mass values found are rounded to the nearest whole number in kg. Checked baggage mass values are rounded to the nearest 0.5 kg figure, as appropriate.

INTENTIONALLY LEFT BLANK

INTENTIONALLY LEFT BLANK

Appendix 1 to JAR-OPS 1.625
Mass and Balance Documentation

See IEM to Appendix 1 to JAR-OPS 1.625

(a) *Mass and balance documentation*

(1) *Contents*

(i) The mass and balance documentation must contain the following information:

(A) The aeroplane registration and type;

(B) The flight identification number and date;

(C) The identity of the Commander;

(D) The identity of the person who prepared the document;

(E) The dry operating mass and the corresponding CG of the aeroplane;

(F) The mass of the fuel at take-off and the mass of trip fuel;

(G) The mass of consumables other than fuel;

(H) The components of the load including passengers, baggage, freight and ballast;

(I) The Take-off Mass, Landing Mass and Zero Fuel Mass;

(J) The load distribution;

(K) The applicable aeroplane CG positions; and

(L) The limiting mass and CG values.

(ii) Subject to the approval of the Authority, an operator may omit some of this Data from the mass and balance documentation.

(2) *Last Minute Change.* If any last minute change occurs after the completion of the mass and balance documentation, this must be brought to the attention of the commander and the last minute change must be entered on the mass and balance documentation. The maximum allowed change in the number of passengers or hold load acceptable as a last minute change must be specified in the Operations Manual. If this number is exceeded, new mass and balance documentation must be prepared.

(b) *Computerised systems.* Where mass and balance documentation is generated by a computerised

mass and balance system, the operator must verify the integrity of the output data. He must establish a system to check that amendments of his input data are incorporated properly in the system and that the system is operating correctly on a continuous basis by verifying the output data at intervals not exceeding 6 months.

(c) *Onboard mass and balance systems.* An operator must obtain the approval of the Authority if he wishes to use an onboard mass and balance computer system as a primary source for despatch.

(d) *Datalink.* When mass and balance documentation is sent to aeroplanes via datalink, a copy of the final mass and balance documentation as accepted by the commander must be available on the ground.

INTENTIONALLY LEFT BLANK

QUESTIONS

1. JAR legislation can be found in:
 - a. JAR OPS-1 subpart A
 - b. JAR OPS-1 subpart D
 - c. JAR OPS-1 subpart K
 - d. JAR OPS-1 subpart J

 2. The mass and centre of gravity of an aircraft must be established by actual weighing:
 - a. by the pilot on entry of aircraft into service
 - b. by the engineers before commencing service
 - c. by the operator prior to initial entry of aircraft into service
 - d. by the owner operator before the first flight of the day

 3. The operator must establish the mass of the Traffic Load:
 - a. prior to initial entry into service
 - b. by actual weighing or determine the mass of the traffic load in accordance with standard masses as specified in JAR-OPS sub part J.
 - c. prior to embarking on the aircraft
 - d. by using an appropriate method of calculation as specified in the JAR Ops subpart J

 4. The mass of the fuel load must be determined:
 - a. by the operator using actual density or by density calculation specified in the Operations Manual.
 - b. by the owner using actual density or by density calculation specified in JAR OPS - 1.
 - c. by the pilot using actual density or by density calculation specified in the Operations Manual.
 - d. by the fuel bowser operator using actual density or by density calculation specified in the Fuelling Manual.

 5. The Dry Operating Mass is the total mass of the aeroplane ready for a specific type of operation and includes:
 - a. Crew and passenger baggage, special equipment, water and chemicals
 - b. Crew and their hold baggage, special equipment, water and contingency fuel
 - c. Crew baggage, catering and other special equipment, potable water and lavatory chemicals
 - d. Crew and baggage, catering and passenger service equipment, potable water and lavatory chemicals.

 6. The Maximum Zero Fuel Mass is the maximum permissible mass of the aeroplane:
 - a. with no useable fuel
 - b. with no useable fuel unless the Aeroplane Flight Manual Limitations explicitly include it.
 - c. including the fuel taken up for take-off
 - d. including all useable fuel unless the Aeroplane Flight Operations Manual explicitly excludes it.
-

7. The Maximum Structural Take-off Mass is:
- the maximum permissible total aeroplane mass on completion of the refuelling operation.
 - the maximum permissible total aeroplane mass for take-off subject to the limiting conditions at the departure airfield.
 - the maximum permissible total aeroplane mass for take-off but excluding fuel.
 - the maximum permissible total aeroplane mass at the start of the take-off run.
8. The Regulated Take-off Mass:
- is the lower of maximum structural take-off mass and the performance limited take-off mass.
 - is the higher of the maximum structural zero fuel mass and the performance limited take-off mass.
 - the maximum structural take-off mass subject to any last minute mass changes.
 - the maximum performance limited take-off mass subject to any last minute mass changes.
9. The Take-off mass
- the maximum permissible total aeroplane mass on completion of the refuelling operation.
 - the mass of the aeroplane including everyone and everything contained within it at the start of the take-off run.
 - the maximum permissible total aeroplane mass for take-off but excluding fuel.
 - the maximum permissible total aeroplane mass at the start of the take-off run.
10. The Operating Mass:
- is the lower of the structural mass and the performance limited mass
 - is the higher of the structural mass and the performance limited mass
 - is the actual mass of the aircraft on take-off
 - is the dry operating mass and the fuel load.
11. The Basic Empty Mass is the mass of the aeroplane:
- plus non-standard items such as lubricating oil, fire extinguishers, emergency oxygen equipment etc.
 - minus non-standard items such as lubricating oil, fire extinguishers, emergency oxygen equipment etc.
 - plus standard items such as unusable fluids, fire extinguishers, emergency oxygen equipment, supplementary electronics etc.
 - minus non-standard items such as unusable fluids, fire extinguishers, emergency oxygen and supplementary electronic equipment etc.

12. The Traffic Load:
- includes passenger masses and baggage masses but excludes any non-revenue load.
 - includes passenger masses, baggage masses and cargo masses but excludes any non-revenue load.
 - includes passenger masses, baggage masses, cargo masses and any non-revenue load.
 - includes passenger masses, baggage masses and any non-revenue load but excludes cargo.
13. The Operating Mass:
- is the take-off mass minus the traffic load.
 - is the landing mass minus the traffic load
 - is the maximum zero fuel mass less the traffic load
 - is the take-off mass minus the basic empty mass and crew mass.
14. The Traffic Load is:
- The Zero Fuel Mass minus the Dry operating Mass
 - The Take-off Mass minus the sum of the Dry Operating Mass and the total fuel load.
 - The landing Mass minus the sum of the Dry Operating Mass and the mass of the remaining fuel.
 - all the above
15. The Basic Empty Mass is the:
- MZFM minus both traffic load and the fuel load
 - Take-off mass minus the traffic load and the fuel load
 - Operating mass minus the crew and fuel load
 - Landing mass less traffic load
16. Is it possible to fly a certified aircraft at a Regulated Take-off mass with both a full traffic load and a full fuel load?
- It might be possible on some aircraft providing the mass and CG remain within limits
 - Yes, all aircraft are able to do this.
 - No, it is not possible on any aeroplane!
 - Only if the performance limited take-off mass is less than the structural limited take-off mass.
17. It is intended to fly a certified aircraft loaded to the MZFM and MSTOM.
- The CG must be within limits during take-off and landing.
 - The CG limits must be in limits throughout the flight, including loading/unloading.
 - The CG does not have to be within limits during the whole of the flight.
 - The CG does not have to be within limits during loading and unloading the aeroplane.

18. The term 'baggage' means:
- Excess freight
 - Any non-human, non-animal cargo
 - any freight or cargo not carried on the person
 - personal belongings
19. Certified Transport category aircraft with less than 10 seats:
- may accept a verbal mass from or on behalf of each passenger.
 - estimate the total mass of the passengers and add a pre-determined constant to account for hand baggage and clothing.
 - may compute the actual mass of passengers and checked baggage.
 - all the above.
20. When computing the mass of passengers and baggage:
- Personal belongings and hand baggage must be included
 - Infants must be classed as children if they occupy a seat
 - Standard masses include infants being carried by an adult
 - Table 1, Table 2 and Table 3 must be used as appropriate if using standard masses for passengers and freight.
 - Weighing must be carried out immediately prior to boarding and at an adjacent location.
- 1, 2 and 4 only
 - 2 and 4 only
 - 1, 2, 3 and 5 only
 - All the above
21. When computing the mass of passengers and baggage for an aircraft with 20 seats or more:
- Standard masses of male and female in Table 1 are applicable.
 - If there are thirty seats or more, the 'All Adult' mass values in Table 1 may be used as an alternative.
 - Holiday Charter masses apply to Table 1 and Table 3 if the charter is solely intended as an element of a holiday travel package.
 - Holiday flights and holiday charters attract the same mass values.
- 1, 3 and 4 only
 - 1 and 2 only
 - 3 and 4 only
 - All the above

22. When computing the mass of passengers and baggage for an aircraft with 19 seats or less:
1. The standard masses in Table 2 apply
 2. If hand baggage is accounted for separately, 6 kg may be deducted from the mass of each male and female.
 3. Table 2 masses vary with both the gender (male or female) of the seat occupant and the number of seats on the aircraft.
 4. Standard masses are not available for baggage.
 5. Standard masses are not available for freight.
- a. 1 only
 - b. 1, 2 and 4 only
 - c. 3 and 5 only
 - d. All the above
23. When computing the mass of checked baggage for an aircraft with twenty seats or more:
1. Table 1 applies
 2. Table 2 applies
 3. Table 3 applies
 4. Mass is categorised by destination.
 5. Mass is categorised by gender
- a. 1, 3 and 4 only
 - b. 2, 3 and 5 only
 - c. 3 and 4 only
 - d. All the above
24. On any flight identified as carrying a significant number of passengers whose masses, including hand baggage, are expected to exceed the standard passenger mass the operator:
- a. must determine the actual mass of such passengers
 - b. must add an adequate mass increment to each of such passengers
 - c. must determine the actual masses of such passengers or add an adequate increment to each of such passengers.
 - d. need only determine the actual masses or apply an increment if the Take-off mass is likely to be exceeded.
25. If standard mass tables are being used for checked baggage and a number of passengers check in baggage that is expected to exceed the standard baggage mass, the operator:
- a. determine the actual masses of such baggage
 - b. must determine the actual mass of such baggage by weighing or by deducting an adequate mass increment.
 - c. need may no alterations if the Take-off mass is not likely to be exceeded.
 - d. must determine the actual mass of such baggage by weighing or adding an adequate mass increment.

26. documentation:
1. must be established prior to each flight
 2. must enable the commander to determine that the load and its distribution is such that the limits of the aircraft are not exceeded.
 3. must include the name of the person preparing the document.
 4. must be signed by the person supervising the loading to the effect that the load and its distribution is in accordance with the data on the document.
 5. must include the aircraft commander's signature to signify acceptance of the document.
- a. All the above
 - b. 2, 4 and 5 only
 - c. 1, 4 and 5 only
 - d. 1 and 3 only
27. Once the documentation has been signed prior to flight:
- a. no load alterations are allowed.
 - b. documented last minute changes to the load may be incorporated.
 - c. the documentation is not signed prior to flight.
 - d. acceptable last minute changes to the load must be documented.
28. Aircraft must be weighed:
1. on initial entry into service
 2. if the records have not been adjusted for alterations or modifications.
 3. every four years after initial weigh
 4. whenever the cumulative changes to the dry operating mass exceed plus or minus 0.5% of the maximum landing mass.
 5. if the cumulative change in CG position exceeds 0.5% of the mean aerodynamic chord.
- a. 1 and 3 only
 - b. 1, 2, 3, 4 and 5
 - c. 1, 2 and 3 only
 - d. 1, 3 and 5 only
29. Aeroplane loading:
1. must be performed under the supervision of qualified personnel
 2. must be consistent with the data used for calculating the .
 3. must comply with compartment dimension limitations
 4. must comply with the maximum load per running metre
 5. must comply with the maximum mass per cargo compartment
- a. 1 and 2B only
 - b. 1, 2, 4 and 5 only
 - c. 1, 2, 3, 4 and 5
 - d. 3, 4 and 5 only

30. An average dry operating mass and CG position may be used for a fleet or group of aeroplanes:
1. if they are of the same model and configuration
 2. providing the individual masses and CG positions meet specific tolerances specified in JAR OPS section J.
 3. providing the dry operating mass of any aeroplane does not vary by more than 0.5% of the maximum structural landing mass of the fleet.
 4. providing that the CG position varies by more than 0.5% of the mean aerodynamic chord of the fleet.
 5. providing appropriate corrections to mass and CG position are applied to aircraft within the fleet which have a physical, accurately accountable difference.
- a. 1, 2, 3, 4 and 5
 - b. 1, 2, 3 and 5 only
 - c. 2, 3 and 4 only
 - d. 1, 4 and 5 only

ANSWERS

1	D	16	A
2	C	17	B
3	B	18	D
4	A	19	D
5	D	20	C
6	B	21	B
7	D	22	D
8	A	23	C
9	B	24	C
10	D	25	D
11	C	26	A
12	C	27	D
13	A	28	B
14	D	29	C
15	C	30	B

CHAPTER TWO
DEFINITIONS AND CALCULATIONS

Contents

INTRODUCTION 23

LIMITATIONS 23

EFFECTS OF OVERLOADING. 23

EFFECTS OF OUT OF LIMIT CG POSITION. 24

MOVEMENT OF CG IN FLIGHT 26

SOME EFFECTS OF INCREASING AEROPLANE MASS 27

DEFINITIONS 27

WEIGHING OF AIRCRAFT 32

WEIGHING SCHEDULE 32

MINIMUM EQUIPMENT LIST 34

CALCULATION OF FUEL MASS 34

CALCULATION OF THE BASIC EMPTY MASS AND CG POSITION 37

CALCULATION OF THE LOADED MASS AND CG POSITION FOR LIGHT AIRCRAFT 39

CALCULATION OF THE LOADED MASS AND CG POSITION FOR LARGE AIRCRAFT 39

COMPILING A DOCUMENT (LOAD SHEET) 39

CG POSITION AS A PERCENTAGE OF MEAN AERODYNAMIC CHORD (MAC) 46

RE-POSITIONING OF THE CENTRE OF GRAVITY 48

RE-POSITIONING OF THE CENTRE OF GRAVITY BY REPOSITIONING MASS. 48

RE-POSITIONING OF THE CENTRE OF GRAVITY BY ADDING OR SUBTRACTING MASS . . 52

GRAPHICAL PRESENTATION 55

CARGO HANDLING 55

FLOOR LOADING 56

LINEAR / RUNNING LOADS 57

AREA LOAD LIMITATIONS. 57

SINGLE ENGINE PISTON/ PROPELLER AIRCRAFT (SEP 1) 59

LIGHT TWIN PISTON/PROPELLER AIRCRAFT (MEP 1) 59

MEDIUM RANGE JET TWIN (MRJT 1). 59

 CALCULATIONS (MRJT) 62

 LOAD AND TRIM SHEET MRJT 69

Continued

Contents Continued

QUESTIONS FOR S.E.P.1; M.E.P.1 AND MRJT	75
SELF ASSESSMENT QUESTIONS FOR MEP 1.	79
SELF ASSESSMENT QUESTIONS FOR MRJT 1	81
ANSWERS	90

INTRODUCTION

JAR-OPS 1 Subpart J requires that during any phase of operation the loading, mass and centre of gravity of the aeroplane complies with the limitations specified in the approved Aeroplane Flight Manual, or the Operations Manual if more restrictive.

It is the responsibility of the commander of the aircraft to satisfy himself that this requirement is met.

LIMITATIONS

Limitations on mass are set to ensure adequate margins of strength and performance, and limitations on CG position are set to ensure adequate stability and control of the aircraft in flight.

EFFECTS OF OVERLOADING

The four forces of lift, weight, thrust and drag acting on an aircraft all induce stress into the airframe structural members in the form of tension, compression, torsion, bending etc. The structure may, at the same time of absorbing these stress, be subject to extremes of temperature ranging from minus 56°c to plus 40°c.

The stress and temperature factors gradually fatigue the structure as time progresses. Fatigue in this sense of the word, is a permanent loss of the physical properties (strength, durability, hardness etc) of the materials comprising the structure. Fatigue will, if left undetected or unattended, eventually cause the structure to fail altogether – possibly with catastrophic and/or fatal consequences.

Fatigue is cumulative and none reversible and the higher the fatigue level the greater the risk of premature structural failure. Structure that is inadvertently subject to additional fatigue may fail earlier than predicted or expected.

The aircraft designer must, for each individual part of the structure, determine the frequency of application of the stress producing loads and, together with the temperature factors, determine the types of stress involved. Based on this data, a Design Limit Load (DLL) is calculated for each member and for the complete structure. The DLL is the maximum load that can be applied to the structure repeatedly during normal operations without inducing excessive fatigue and the pilot must never deliberately exceed this value.

As a safe guard, the aviation authorities impose a factor of safety of 50% to the DLL to produce a Design Ultimate Load (DUL). The DUL is the minimum load the structure must be able to absorb in an emergency (heavier than normal landing or flight in exceptional gusty wind conditions) without collapsing. In order to keep weight to a minimum the aircraft's structure is manufactured from materials that are just capable of absorbing the DUL.

Structure subject to loads in excess of the DUL is likely to suffer some permanent damage and may even collapse altogether.

An aeroplane's principal function is to lift mass into the air, transport that mass through the air and then land it back on the ground without damage. Clearly, the greater the mass that has to be lifted the greater will be the loading on each member of the aircraft structure. Overloading the aeroplane will induce additional fatigue. For the purposes of cost efficiency it is important to maximise the mass transported by the aeroplane but without overloading it.

The manufacturer of the structural parts of the aircraft is responsible for determining the stresses the aeroplane will be subject to both on the ground and in the air, and to impose suitable mass limits so that the integrity of the structure is guaranteed throughout the aircraft's working life. The limits include: the maximum taxi mass (MTM); the maximum zero fuel mass (MZFM); the maximum structural take-off mass (MSTOM) and the maximum structural landing mass (MSLM). These values must never be exceeded in normal operation.

It is necessary at this point to note that, in Mass & Balance terms, mass and weight are synonymous (used to express the same thing).

Age, inappropriate handling, environmental and climatic conditions are all factors that induce stress and fatigue into the aircraft's structure. However, weight is the principal stress and fatigue inducing factor for aircraft.

Weight also has pronounced effects on the aircrafts performance, handling and aerodynamic properties. With an increase in weight:

- Performance is reduced:
 - Take off and landing distances will increase. V1 decision speed, VR rotation speed, V2 screen height, and the stopping distance will all increase
 - The climb gradient, rate of climb and ceiling height will all reduce.
 - The rate of descent will increase
 - The stalling speed will increase and maximum speed will reduce.
 - The safety margins and the effective speed range between low and high speed buffet will reduce.
 - Drag and fuel consumption will increase
 - Range and endurance will reduce.
- Wing root stresses will increase.
- Manoeuvrability will reduce.
The aircraft will become less responsive to control inputs and more difficult to fly.
- Wing root stresses and undercarriage loads will increase as will tyre and brake wear.

EFFECTS OF OUT OF LIMIT CG POSITION

The centre of gravity (CG) is:

- the point that the total weight of the aircraft is said to act through
- the point of balance
- that part of the aircraft that follows the flight path
- the point that the aircraft manoeuvres about in the air
- the point that the three axes of the aircraft pass through.

The position of the CG determines how stable or how manoeuvrable the aircraft will be. Starting at the mid position of the fuselage, a CG moving towards the nose of the aircraft will progressively increase the stability and, at the same time, progressively reduce the manoeuvrability. Similarly, a CG moving aft towards the tail of the aircraft will increase the manoeuvrability and decrease the stability. Too much stability increases the flying control stick forces and the work load on the pilot trying to overcome them. Too much manoeuvrability makes the aircraft unstable and difficult to control.

With regard to aeroplanes, the CG is not fixed. It moves in flight as a result of fuel burn, flap positions, and crew and passenger movements. It is the aircraft operator's responsibility to ensure that the CG movement is retained within the limits imposed by the manufacturer.

The manufacturer sets down CG range of movement limits to ensure that the average pilot is able to control the aircraft through all stages of flight without undue concern or fatigue.

The following paragraphs indicate the effects that might occur if the CG is caused to exceed the limits. Students are advised to learn them well – they are frequently asked in the exams.

A CG outside the forward limit:

- Drag increases, consequently, fuel consumption, range and endurance decrease. In order to keep the nose of the aircraft from pitching downwards the tail plane must produce a balancing down load – a bit like a see-saw. The resulting elevator deflection increases drag, which in turn increases fuel consumption and reduces range and endurance.
- The longitudinal stability is increased, resulting in higher control column forces during manoeuvres and a corresponding increase in pilot fatigue.
- The increase in tail down force is equivalent to an increase in weight; consequently the stall speed will increase. An increase in stall speed has a significant effect on other performance aspects of the aircraft: take-off and landing speeds will increase, the available speed range will reduce and the safety margin between low and high speed buffet will narrow.
- The ability to pitch the nose up or down will decrease because of the increased stability.
- Take-off speeds V_1 , V_R , V_{MU} will increase. On the ground the aeroplane rotates about the main wheels and uses the elevators to raise the nose for take-off. The CG, being ahead of the main wheels, produces a down force that the elevators, together with the speed of the airflow passing over them, must overcome. The more forward the CG the greater the down force and, for a particular elevator deflection, the greater the speed of the airflow required. The aircraft must accelerate for longer to produce the air speed required.

A CG is outside the aft limit:

- Longitudinal stability is reduced and, if the CG is too far aft, the aircraft will become very unstable (like a bucking bronco). Stick forces in pitch will be light, leading to the possibility of over stressing the aircraft by applying excessive 'g'.
- Recovering from a spin may be more difficult as a flat spin is more likely to develop.
- Range and endurance will probably decrease due to the extra drag caused by the extreme manoeuvres.
- Glide angle may be more difficult to sustain because of the tendency for the aircraft to pitch up.

MOVEMENT OF CG IN FLIGHT

Figure 2.1 compares, in a simplistic arrow format, the effects on aircraft performance of having the CG on the forward CG limit to the performance that would be achieved with the CG on the aft limit. It goes on to show how an increase in mass affects performance. Be advised that the M&B examinations contain a number of performance related 'theory type' questions (they seldom include calculations).

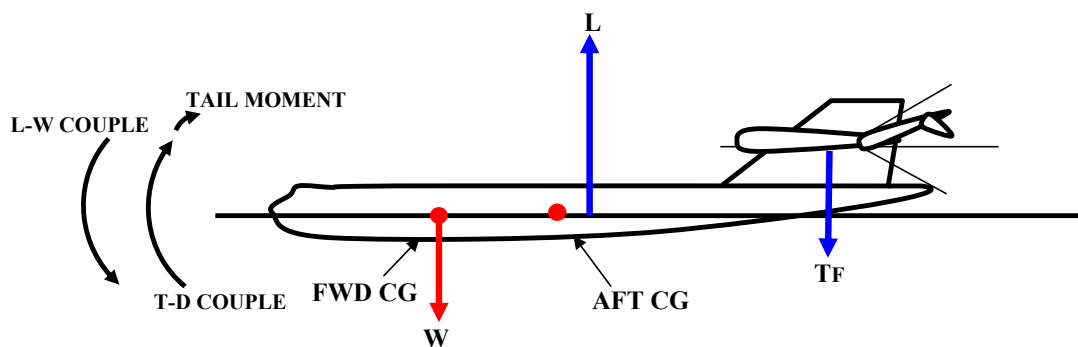


Figure 2.1

CG ON FWD LIMIT

STABILITY	↑
STICK FORCES	↑
MANOEUVRABILITY	↓
DRAG	↑
V_s (STALLING SPEED)	↑
V_R (ROTATION SPEED)	↑
RANGE	↓
FUEL CONSUMPTION	↑

ABILITY TO ACHIEVE

1. CLIMB GRADIENT	↓
2. GLIDE SLOPE	↓

CG ON AFT LIMIT

STABILITY	↓
STICK FORCES	↓
MANOEUVRABILITY	↑
DRAG	↓
V_s	↓
V_R	↓
RANGE	↑
FUEL CONSUMPTION	↓

ABILITY TO ACHIEVE

CLIMB GRADIENT	↑
GLIDE SLOPE	↑

SOME EFFECTS OF INCREASING AEROPLANE MASS

V_1 (DECISION SPEED)	↑
V_R (ROTATION SPEED)	↑
V_{MU} (MIN LIFT OFF SPEED)	↑
V_S (STALLING SPEED)	↑
TAKE-OFF AND LANDING RUN	↑
RANGE AND ENDURANCE	↓
RATE OF DESCENT	↑
MAX HORIZONTAL SPEED	↓
RATE OF CLIMB	↓
MAX ALTITUDE	↓
FUEL CONSUMPTION	↑
BRAKING ENERGY	↑
TYRE WEAR	↑
STRUCTURAL FATIGUE	↑

↑ = increase

↓ = decrease

The JAR regulations state that the CG position must remain within the range limits at all times, whether in the air, taking off, landing or loading and unloading on the ground. Changes to the load distribution that may occur during any stage of the intended flight i.e. fuel burn, passenger or crew movements, will affect the CG position and must be properly accounted for prior to take-off..

DEFINITIONS

The following definitions are to clarify and enhance the definitions that are found in CAP 696, pages 3 and 4.

Centre of Gravity

The point through which the force of gravity is said to act on a mass (in CG terms, the point on the aircraft through which the total mass is said to act in a vertically downward manner). The Centre of Gravity is also the point of balance and as such it affects the stability of the aircraft both on the ground and in the air.

Centre of Gravity limits.

The CG is not a fixed point it has a range of movement between a maximum forward position and a maximum rearward position which are set by the aircraft manufacturer and cannot be exceeded. The CG must be on one of the limits or within the limit range at all times. The limits are given in the Flight manual and are defined relative to the datum. They may also be given as a percentage of the mean chord of the wing. The mean chord was known as the Standard mean Chord but is now known as the Mean Aerodynamic Chord or more simply, the MAC.

Datum

A point along the longitudinal axis (centre line) of the aeroplane (or its extension) designated by the manufacturer as the zero or reference point from which all balance arms begin. By taking moments about the balance arm the CG position of the aircraft can be determined. For the purposes of this phase of study the lateral displacement of the CG from the longitudinal axis is assumed to be zero.

Balance Arm

The distance from the aircraft's Datum to the CG position or centroid of a body of mass. For example, the centroid of a square or rectangle is the exact centre of the square or rectangle and, in such cases, the balance arm is the distance from the datum to the exact centre of the square or rectangle. Unfortunately, cargo bays are seldom exact squares or rectangles and so the centroid (the point the total weight acts through) is given by the manufacturer.

For the purposes of calculations, all balance arms ahead of (in front of) the datum are given a negative (-) prefix and those behind (aft of) the datum are given a positive (+) prefix.

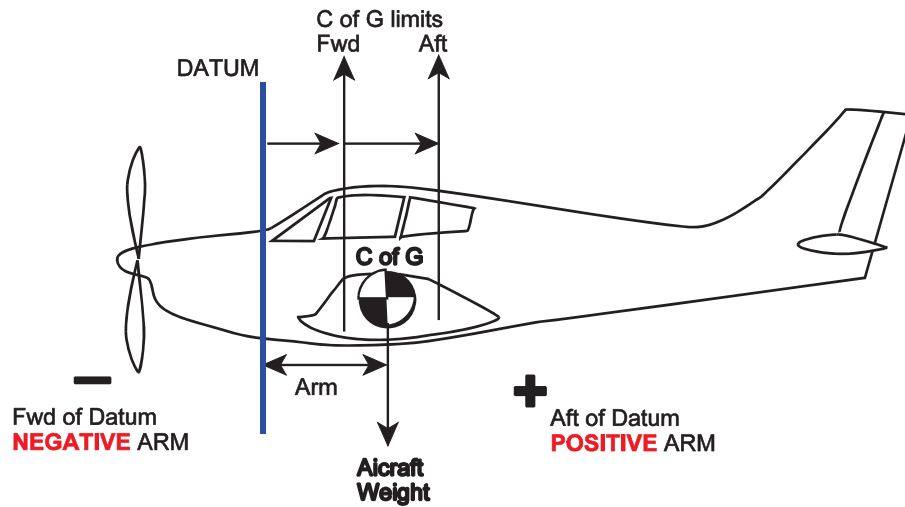


Figure 2.2 Positive and Negative Balance Arms

Inexperienced students tend to get their positive and negative signs mixed up and thus fail to arrive at the correct answer. In arithmetical calculations, a positive value multiplied by a negative value results in a negative answer but two positive or two negative values multiplied together always produce a positive answer.

Loading Index

The result of multiplying a force by a mass often produces an answer of such magnitude that it is too bulky and time consuming to utilise. A Loading Index is simply a moment divided by a constant and has the effect of reducing the magnitude of the moment to one that is much easier to use.

ITEM	MASS (kg)	ARM (in)	MOMENT(kgin)	CONSTANT	INDEX
BEM	31,994	691	22107854	/1000000	22
FLT CREW	180	183	32940	/1000000	0
CABIN CREW	540	1107	597780	/1000000	0.6
SPECIAL EQUIPMENT	12000	701	8412000	/1000000	8.4
DOM =	44714		31150574	/1000000	31

Figure 2.3 Example of an Index

In the example shown, the moment for the DOM is 31150574 but the Dry Operating Index (DOI) is only 31. Later, as you progress through the course, you will be using a DOI and another index called the Fuel Index to complete a Load and trim Sheet.

Basic Empty Mass

See CAP 696 for the definition of the BEM. All light aircraft use the BEM and its CG position as the foundation from which to calculate all relevant masses and CG positions see Figure 2.8 as an example.

Dry Operating Mass

See CAP 696 for the definition of the DOM. All large aircraft use the DOM as the foundation from which to calculate all relevant masses and CG positions. The Load and Trim Sheet cannot be completed until the DOM and its CG position are known.

Operating Mass

See CAP 696 for the definition of the OM. The OM is also used when completing the Load and Trim Sheet.

Traffic Load

See CAP 696 for the definition of the Traffic Load. Originally known as the 'payload', the traffic load is the revenue generating load that pays the salaries and hopefully produces a profit for the operator. The definitions of and calculations of the traffic load constitute a sizeable part of the exam. There are six ways to define the traffic load and students need to be familiar with all of them.

Useful Load

The Useful Load is the sum of the traffic load and the take-off fuel load.


The Maximum Zero Fuel Mass

See CAP 696 for the definition of the MZFM. The maximum stress in the wing roots occurs when the wing fuel tanks are empty. To ensure that the wings don't fold up permanently above the aircraft as the fuel is consumed a maximum zero fuel mass is imposed on the structure by the manufacturer.

Maximum Structural Taxi Mass

Every litre of fuel on board is essential for safe operations and aircraft are allowed to carry additional fuel for engine starting and ground taxiing purposes. This additional fuel, which is limited to a maximum value, is allowed to take the weight of the aircraft above the MSTOM during ground operations only. The additional fuel should be consumed by the time the aircraft is ready to commence the take-off run. The MSTM may also be referred to as the Ramp Mass or the Block Mass.

See CAP 696 for definitions of MSTOM, PLTOM, MSLM and PLLM

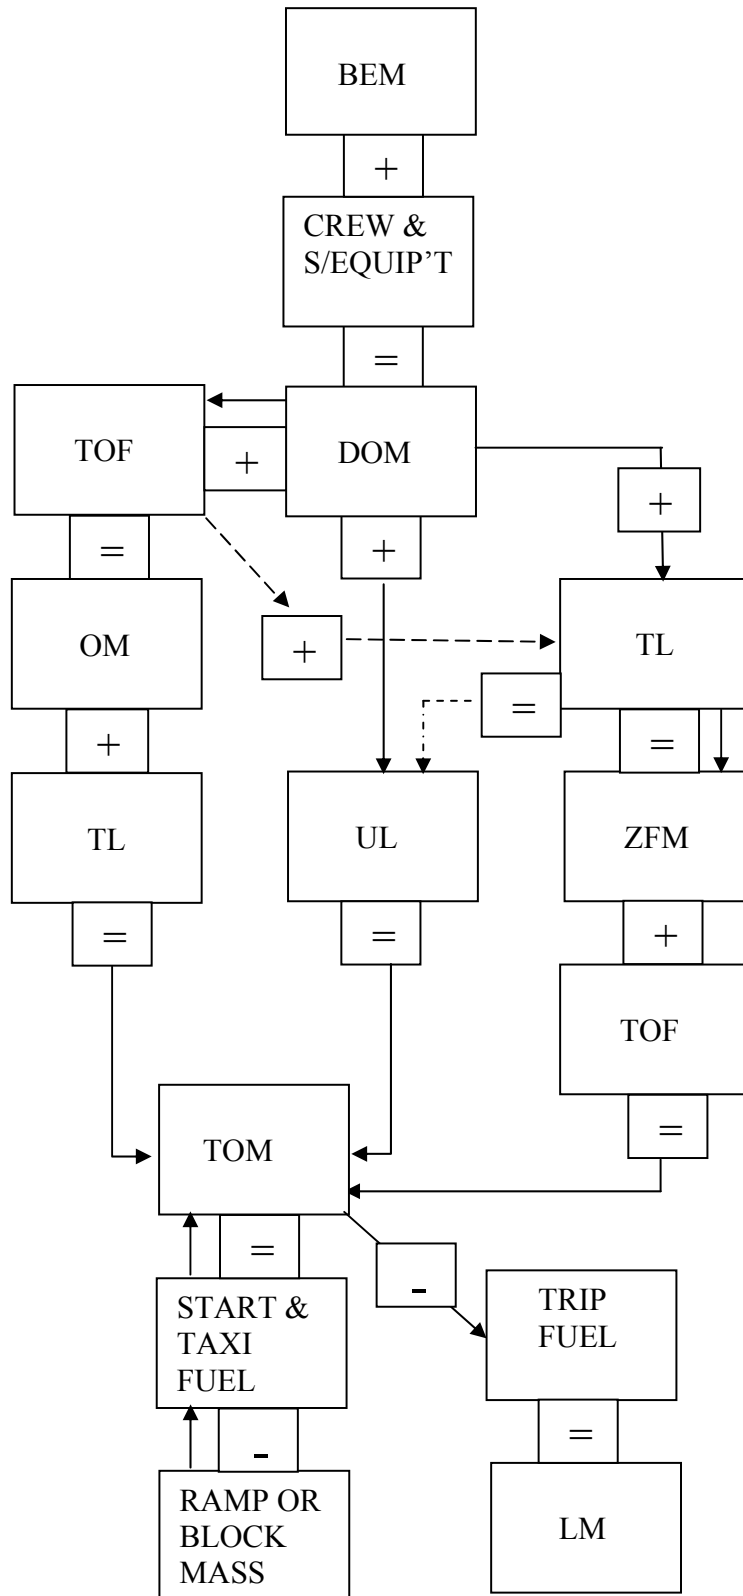

Note: Treat dotted lines separately

Figure 2.4 Pieces of the Jigsaw

Examples of 'definition' questions:

1. The operating mass of an aircraft is:
 - a. The dry operating mass plus the take-off fuel mass
 - b. The empty mass plus the take-off fuel mass
 - c. The empty mass plus crew, crew baggage and catering
 - d. The empty mass plus the trip fuel mass

2. What effect has a centre of gravity close to the forward limit?
 - a. A better rate of climb capability
 - b. A reduction in the specific fuel consumption
 - c. A reduce rate of climb for a particular flight path
 - d. A decreased induced drag

3. The DOM of an aeroplane is:
 - a. TOM minus Operating Mass
 - b. LM plus Trip Fuel
 - c. Useful Load minus Operating Mass
 - d. TOM minus Useful Load

4. The Traffic Load of an aeroplane is:
 - a. TOM minus Operating Mass
 - b. LM plus Trip Fuel
 - c. Useful Load minus Operating Mass
 - d. TOM minus Useful Load.

Answers are shown on Page 90

WEIGHING OF AIRCRAFT

Aircraft are weighed on specialised weighing equipment in a draught free hangar at periods specified in JAR-OPS 1, Subpart J. On each and every occasion of weighing a WEIGHING SCHEDULE is compiled by the person in charge of the weighing procedure. The schedule lists the BASIC EQUIPMENT installed on the aeroplane and records the mass values displayed on the weighing apparatus, together with the calculated moments. It culminates in a statement defining the Basic Empty Mass and Centre of Gravity position of the aeroplane and is signed by the person in charge of the weighing procedure. The schedule is then retained in the aircraft's TECHNICAL LOG until the next weigh. At each subsequent weigh the list of basic equipment on the previous Weighing Schedule is used to define the condition the aircraft must be reduced down to in order that an accurate comparison of weights can be determined. The weighing procedure is a time and manpower consuming process as all none basic items of equipment such as passenger seats and passenger service equipment (food and duty free trolleys etc) do not form part of the basic equipment and must first be removed prior to the weigh and be refitted afterwards.

WEIGHING SCHEDULE

A/C Type _____ Mark _____ Registration Number _____

Registered owner _____ Date _____

LIST OF BASIC EQUIPMENT

	ITEM	MASS	ARM	MOMENT
1.	Pilot's seat	100	1	100
2.	C/pilot's seat	100	1	100
3.	Compass	25	2	50
4.	S/B compass	25	2	50
5.	Radio	20	2	40

ITEM	MASS (Kg)	ARM	MOMENT (kg in)
Nose Wheel	134	-2	-268
Left Main	550	90	49,516.5
Right Main	550	90	49,516.5
BEM	1,234	80	98,765

Signed _____ Date _____

Figure 2.5. A Weighing Schedule (simplified for training purposes)

Any changes to the basic equipment that occur in the period between each weigh are recorded in the aeroplane's Technical Log and, as they vary from the equipment listed on the previous weighing schedule, they have to be accounted for separately at the next weigh.

Weighing Equipment. There are a number of ways of weighing aircraft accurately but, depending on the overall size and weight of the aeroplane, weigh-bridge scales, hydrostatic units or electronic equipment are the principal methods in use.

- **Weigh-bridge scales.** This equipment is generally used for light aeroplanes and consists of a separate electronic weighing platform for the nose or tail wheel and each main wheel assembly of the aircraft. The mass at each platform is recorded directly on the balance arm or electronic display and the masses are added together to give the BEM.
- **Hydrostatic units.** This equipment is used for larger, heavier aircraft and utilises the principle embodied in Pascal's Law i.e. that the pressure of a liquid in a closed container is proportional to the load applied. The units are fitted at each jacking point and are interposed between the lifting jack and the jacking points on the aircraft. Again, the mass values on each unit are added together to give the BEM
- **Electronic equipment.** This equipment is also used on the larger, heavier aircraft and consists of strain gauges fitted at each jacking point and utilises the principle that electrical resistance varies with the load applied. The readings are added together to give the BEM.

The other masses and CG positions applicable to the aircraft e.g. DOM, OM, TOM etc, can be determined by simple addition and multiplication once the Basic Empty Mass and CG position of the aeroplane have been established.

The mass of the fuel load can be calculated arithmetically providing the quantity and specific gravity of the fuel are known.

Actual mass of passengers and baggage can be used or the standard masses given in the tables in JAR Ops, Subpart J can be used as an expedient alternative.

It is not normally possible to apply standard mass tables to freight because it varies so much from flight to flight. Therefore, in general, all freight has to be weighed. It is possible, in certain circumstances, for an operator to apply to the CAA for permission to produce and use standard mass tables for freight, but this exception is not part of the JAR examinations syllabus.

Light aircraft use the BEM and CG position as the foundation from which the other mass and CG requirements are determined. Larger aircraft have additional mass and CG limits to comply with and they utilise a Load and Trim Sheet, incorporating the DOM as a basis, to simplify and standardise the process.

The operator of fleet aeroplanes of the same model and configuration may use an average DOM and CG position for the whole fleet providing the requirements of JAR Ops, Subpart J are met.

MINIMUM EQUIPMENT LIST

An aeroplane manufacturer must produce a Minimum Equipment List (MEL) for each of their aircraft type. The MEL defines, amongst other things, the minimum level of serviceable usable equipment the aircraft must have prior to flight. As an example, a aeroplane with three engines would be permitted to fly, in some circumstances, with only two engines operable.

The MEL serviceable equipment requirements vary according to the climatic and environmental conditions that exist in various theatres of the world. An aircraft operator will extract from the MEL those limitations applicable to his/her aircraft and will enter them into the Aircraft Operating Schedule.

In addition, the MEL lists the basic equipment requirements for each aircraft and also lists the optional specialist equipment that can be fitted for a particular role. It is therefore very useful when determining the BEM and DOM of an aeroplane.

CALCULATION OF FUEL MASS

It is the commander of the aeroplane's responsibility to ensure that there is sufficient fuel on board the aeroplane to safely complete the intended flight and to land with not less than a specified level of fuel remaining in the tanks – irrespective of delays and diversions.

The safe operating fuel requirements defined above are satisfied by filling the tanks as shown in Figure 2.6.

2% of the tank left empty for venting

2% of the tank left empty for venting
<p>START AND TAXI FUEL Extended Twin Operations (ETOPs) for example</p>
<p>TRIP FUEL Sufficient for flight from airfield 'a' to airfield 'b' together with enough extra fuel to allow for bad weather on route and/or landing delays at airfield 'b'.</p>
<p>ALTERNATE FUEL (Usually 3% to 5% of the trip fuel) Sufficient to allow for a diversion from airfield 'b' to a planned diversion airfield 'c'.</p>
<p>FINAL RESERVE (Absolute emergency use only)</p>
<p>CAPTAIN'S DISCRETION Economic or other reasons</p>

Figure 2.6. Fuel Requirement Regulations

Taking off at airfield 'a' and landing at airfield 'b' is classed as a trip or sector.

Having determined the mass of the fuel required for the trip, the commander of the aeroplane must convert this mass value into a quantity value for the benefit of the refuel operator. Fuel is usually dispensed in gallons or litres.

In order to convert quantity (gallons or litres) into mass (lbs or kilograms) and visa versa, the density or the specific gravity (sg) of the fuel must be known. Normally, the delivery note provided by the refuel operator provides the sg of the fuel taken up. However, if, for some unforeseen reason, the actual fuel density is not known a standard fuel density, as specified by the operator in the Operations Manual, must be used. Density is defined as mass per unit volume and relative density or specific gravity (sg), is simply a comparison between the mass of a certain volume of a substance and the mass an equal volume of pure water.

The following chart is a handy method of converting volume to mass. Students are advised to remember the chart and how to use it as it will not be provided in the exams.

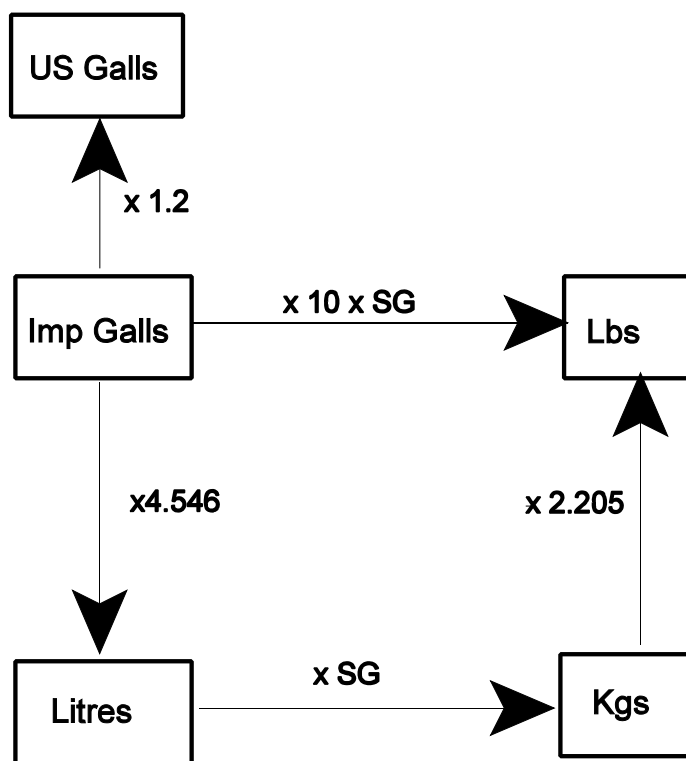


Figure 2.7 Quantity/Mass Conversion Chart

When moving in the direction of the arrows multiply by the numbers above the line. When moving against the direction of the arrows divide by the numbers above the line.

Note: Conversion factors have been rounded for simplicity hence small errors might occur.

Worked Example 1

- a) Find the mass of 50 Imperial gallons of AVGAS with a specific gravity of 0.72.

$$\text{Mass} = 50 \times 10 \times 0.72 = 360 \text{ lb}$$

- b) For 50 US gallons this would be:

$$\text{Mass} = 50 \div 1.2 \times 10 \times 0.72 = 300 \text{ lb}$$

Worked Example 2

Find the mass of 2250 litres of fuel with a density of 0.82.

$$\text{Mass} = 2250 \times 0.82 = 1845 \text{ kg.}$$

Try these on your own

1. You require 63,000 kg of fuel for your flight, the aircraft currently has 12,000 kg indicated on the gauges. How many US gallons of fuel do you request if the density is 0.81.
2. The refueller has metered 4596 Imperial Gallons; your fuel gauges indicated 5,600 lbs before refuelling. What should it indicate now? The fuel density is 0.79.
3. If the mass of 6000 US gallons of fuel is 16780 kg, what is its S.G?
4. The refuel bowser delivers 10,000 litres of fuel which is incorrectly entered on the aircraft load sheet as 10,000 kgs of fuel. Is the aircraft heavier or lighter than the take-off mass recorded on the Load Sheet and how would this effect the range? (Take the SG of the fuel as 0.75)
 - a. Heavier and would decrease the range.
 - b. Heavier and would increase the range
 - c. Lighter and would decrease the range
 - d. Lighter and would increase the range

Answers shown on Page 90

CALCULATION OF THE BASIC EMPTY MASS AND CG POSITION

In order to determine the Basic Empty Mass and CG position of an aeroplane the aircraft must first be prepared to the basic empty mass standard which entails removing all special equipment and useable fuel and oils.

The aircraft is placed such that its main wheels and the nose (or tail) wheels rest on the individual weighing scales which have been calibrated and zeroed. The readings on the scales are recorded as shown:

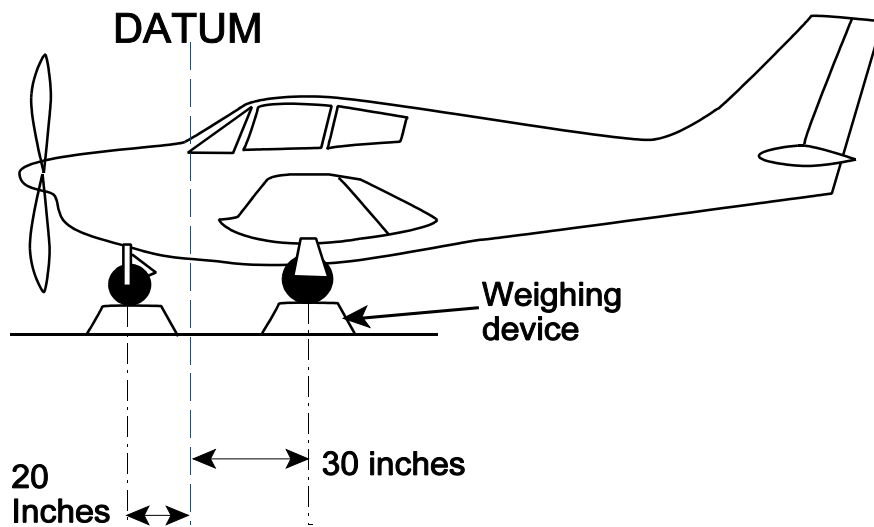


Figure 2.8 Basic Empty Mass and CG Calculations

ITEM	MASS (lb)	ARM (in)	MOMENT
Nose wheel	500	-20	-10000
L. Main wheel	2000	30	+60,000
R. Main wheel	2000	30	+60,000
BEM =	4500 lb	Total Moment =	+110,000 lb in

$$CG = \frac{\text{Total Moment}}{\text{Total Mass}} = \frac{+110,000 \text{ lb in}}{4,500 \text{ in}} = +24.4 \text{ inches}$$

The Basic Empty Mass of the aeroplane is 4500 lb and the CG is 24.4 inches behind the datum (as shown by the positive sign).

The Basic Empty Mass is found by adding together the readings on the scales.

To find the CG position we need to take moments about the datum. In Mass & Balance terms a moment is a mass multiplied by a balance arm. Remember that arms (distances) forward of the datum are negative and a negative multiplied by a positive gives a negative value (see the nose wheel line above).

Notice in the example that each of the three entries above the line consist of a mass multiplied by an arm to give a moment. The entry below the line consists of a mass and a moment but no balance arm. The missing arm is the CG position.

To find the CG position the total moment is divided by the total mass.
If the CG value is negative then the CG is in front of the datum otherwise it is behind the datum.

It is important to distinguish between mass and weight. Mass is the amount of matter in a body in kilograms and weight is the force that the matter exerts on the earth's surface, in Newtons.

If the readings on the weighing scales are given in Newtons but the question asks for the BEM and CG position then it is necessary to convert the weight into mass to arrive at the right answer.

ITEM	WEIGHT (N)	ARM (in)	MOMENT
Nose wheel	500	-20	-10000
L. Main wheel	2000	30	+60,000
R. Main wheel	2000	30	+60,000
<hr/>			
	BEM = 4500 N	Total Moment =	+110,000 N in
CG =	$\frac{\text{Total Moment}}{\text{Total Mass}}$	$= \frac{+110,000 \text{ N in}}{4,500 \text{ in}}$	$= +24.4 \text{ inches}$

The weight of the aeroplane is 4500 N but to find the Basic Empty Mass we must divide the weight by 9.81 m/s²

$$4500 \text{ N} / 9.81 \text{ m/s}^2 = 458.7 \text{ kg}$$

The BEM = 458.7 kg and the CG is 24.4 inches behind the datum

Try these examples yourself;

- An aeroplane with a two wheel nose gear and four main wheels rests on the ground with a single nose wheel load of 725 kg and a single main wheel load of 6000 kg. The distance between nose wheels and the main wheels is 10 metres. What is the BEM and how far is the centre of gravity in front of the main wheels?

(25450 kg and 57 cm in front of the main wheels)

- A tail wheel aeroplane has readings of 2000 lbs and 2010 lbs for the main wheels and 510 lbs for the tail wheel. The nose wheel is 16 feet from the main wheels. What is the BEM and CG position? (1 foot = 12 inches).

(4520 lb and 21.7 inches aft of the main wheels)

- A light aircraft has the datum 20 inches behind the nose wheel and 70 inches forward of the main wheels. The readings on the weighing scales are 255 N nose wheel and 1010 N on each main wheel. What is the BEM and CG position?

(232 kg and 60 inches aft of the datum)

CALCULATION OF THE LOADED MASS AND CG POSITION FOR LIGHT AIRCRAFT

The loaded mass and CG is determined by tabulating the mass, arm and moment of the passengers, baggage, cargo, fuel and oil, adding the masses to the BEM to find the TOM and adding the moments to find the Total Moment. The CG is found by dividing the Total Moment by the Total Mass: $CG = \text{Total Moment} / \text{Total Mass}$.

The LM is found by subtracting the fuel and oil consumed during the flight from the TOM. The CG position of the LM is found by taking moments and dividing the LM Moment by the LM.

For simplicity and standardisation the mass, arms and moment data is tabulated on a Load Manifest or Load Sheet. (See Table 1, overleaf, for a complete example).

CALCULATION OF THE LOADED MASS AND CG POSITION FOR LARGE AIRCRAFT

The TOM and ZFM and their respective CG positions are found by tabulating masses and moments as for light aircraft except the DOM is used as the starting point instead of the BEM.

Because of the inclusion of start/taxi fuel and the complexity of the traffic load a Load and Trim sheet is used to formalise the mass and balance data.

The ZFM and its CG position are used in preference to the LM and CG position because if the aircraft uses any of the contingency or alternate fuel, the actual landing mass and CG position may be significantly different to the calculated LM and CG values. If the TOM and ZFM are OK and their respective CG's are within limits then the CG will be in limits for any landing mass. (See pages 71 and 73 for examples of a completed Load Sheet and Trim Sheet respectively).

COMPILING A DOCUMENT (LOAD SHEET)

A load sheet in its simplest form is a list showing the BEM/DOM and CG position. Added in tabular form are the elements of the traffic load and fuel by their individual masses, arms and moments. From this list the take off mass and CG position can be calculated.

A load sheet is individual to each type of aircraft and must be compiled before each flight.

A load sheet is required by JAR-OPS 1 Subpart J to contain some mandatory information:

- The aeroplane registration and type
- The Flight Number
- The identity of the commander
- The identity of the person who prepared the document.
- The dry operating mass and CG position.
- The mass of take off fuel and trip fuel.
- The mass of consumables other than fuel.
- The items of traffic load, passengers, baggage, freight.
- The take of mass, landing mass and zero fuel mass.
- The load distribution.
- The aeroplane CG positions.
- The limiting mass and CG values.

In the following pages we will concentrate on calculating the take off mass and CG position for the single engine piston aircraft SEP 1 using these values.

Basic empty mass	2415	lbs
Front seat occupants	340	lbs
3rd and 4th seat passengers	340	lbs
Baggage zone B	200	lbs
Fuel at engine start	60	US galls
Trip fuel (calculated fuel burn)	40	US galls

When completed the load sheet can be used to check that limiting values such as MZFM; RAMP MASS; MTOM and MLM have not been exceeded. The mass and CG limits are presented in graphical form (CAP 696, section 2, SEP 1 page 4, Figure 2.5) against which the calculated values can be checked.

ITEM	MASS (lbs)	ARM (in)	MOMENT/100
Basic Empty Mass	2415	77.7	1876.46
Front seat occupants	340	79	268.6
3rd and 4th seat pax	340	117	397.8
Baggage zone A	nil	108	
5th and 6th seat pax	nil	152	
Baggage zone B	200	150	300
Baggage zone C	nil	180	
SUB TOTAL = ZERO FUEL MASS			2842.86
Fuel loading 60 US galls	360	75	270
SUB TOTAL = RAMP MASS			3112.86
Subtract fuel for start taxi and run up. (see note)	-13		-10
SUB TOTAL = TAKE OFF MASS			3102.9
Trip fuel	-240	75	-180
SUB TOTAL = LANDING MAS			2922.9

Table 1. Completed Load Sheet Solution

Note: Fuel for start, taxi and run up is normally 13 lbs at an average entry of 10 in the column headed moment / 100

The arm data is entered on the load sheet in the appropriate columns as shown above. The individual moments are calculated by multiplying the mass of an item by its balance arm from the datum and entering the Figure in the moment column.

Moments are often large numbers containing more than six digits and this can be an extra source of difficulty. In the SEP example shown, the moments have been divided by one hundred to reduce the number of digits and make them more manageable. Take care if you use this procedure because you must remember at the end of any calculations to multiply the final answers by one hundred to arrive at the correct total moment.

The fuel load may be given as a quantity (Imperial or American gallons) rather than a mass and you must convert it to mass before you can complete the load sheet (see para 9). Fuel mass and distribution may also be given in tabular form as shown in the example above, where the fuel mass and moment have been taken from the S.E.P.1 fuel chart, Figure 2.3, of the JAR Loading Manual.

The Take-off and Landing CG positions can now be determined by using the following procedure:

Take-off CG

- Sum (add up) the vertical 'MASS' column to determine in turn, the ZFM, the Ramp Mass and the TOM.
(ZFM = 3295 lb; Ramp Mass = 3655 lb and TOM = Ramp Mass – Start/Taxi fuel = 3655 – 13 = 3642 lb)
- Check the Operating Manual to ensure that limiting masses of MZFM, MSTM and Regulated TOM have not been exceeded.
- Sum the vertical 'MOMENTS' column to determine the total moment for ZFM, Ramp Mass moment and TOM.
(ZFM moment = 284286 lb in; Ramp Mass moment = 284286 + 27000 = 311286 lb in; TOM moment 311286 – 1000 = 310286 lb in).

Note, the Figure s in the table are shown in the abbreviated form i.e. 310286/100 = 3102.9 which is less accurate but easier to cope with.

- Divide the moment of the TOM by the TOM to determine the CG position at take-off.
(TOM CG position = $310290 \div 3642 = 85.2$ inches aft of the datum).
- Check the Operating Manual to ensure that the CG is within limits at both the ZFM and TOM situations. If this is the case then the CG will remain within the limits throughout the flight and should not go out of limits during the journey provided the fuel is used in the correct sequence.

Landing CG

- Determine the moment of the fuel used in flight (the trip fuel) by multiplying its mass by the fuel arm. In light aircraft the fuel arm will usually be the same as the one used previously to calculate the take-off CG position. However, caution is required because in some large aircraft the balance arm of the fuel may change with the quantity of fuel consumed.

THE FUEL CONSUMED WILL GIVE A NEGATIVE MASS IN THE MASS COLUMN AND THIS WILL CHANGE THE MOMENT SIGN I.E. IF THE FUEL ARM IS POSITIVE THE FUEL MOMENT WILL BECOME NEGATIVE.

- In the 'MASS' column, subtract the fuel used during the flight from the TOM to determine the Landing Mass.
(Landing Mass = 3642 – 240 = 3402 lbs).
- Check the Operating Manual to ensure that the Regulated Landing Mass has not been exceeded.
- In the 'MOMENTS' column, determine the sign of the fuel moment and add or subtract it as appropriate, to the TOM moment to determine the Landing moment.
(Landing Moment = 310286 – [240 x 75] = 310286 – 18000 = 292286 lb in [or 2922.9 lb in the abbreviated form]).

- If the CG is within limits at the ZFM then, for large aircraft, it is not normally necessary to calculate the Landing CG position because, as stated previously, the CG will be within limits throughout the flight. However, for light aircraft it is usual to determine the landing CG position and this is simply achieved by divide the Landing moment by the Landing Mass. (Landing CG position = $292286 \div 3402 = 85.92$ inches aft of the datum because it has a positive sign).

The CG can also be found by using the Centre of Gravity Envelope for the SEP.1 shown below. This is a graphical representation of the mass and centre of gravity limits. The vertical axis is the mass in pounds, the horizontal axis is the CG position in inches aft of the datum and the slanted lines represent the moment/100.

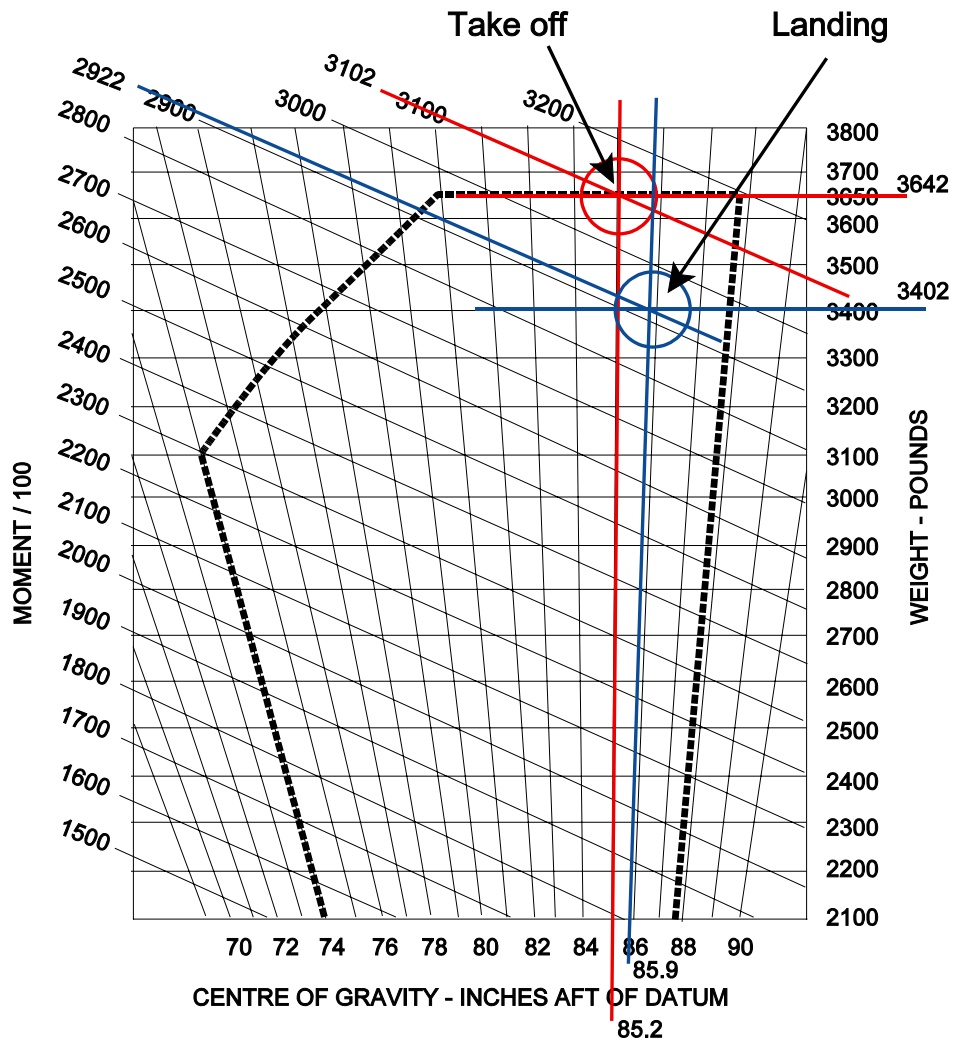


Figure 2.9 SEP 1 CG envelope

Example 3

Try this example of calculating the take off and landing mass and CG position for a fictitious aircraft without using a formal load sheet.

For the data given below:

- Find the CG for take off as loaded.
- Find the CG for landing after a flight lasting for 1 hour 30 minutes.

Maximum Take-off Mass 2245 lb

Maximum Landing Mass 2100 lb

Centre of Gravity limits 2 in forward to 6 in aft of datum

Fuel Consumption 7.0 US Gallons per hour

Oil Consumption 1.0 US quart per hour

ITEM	MASS (lb)	ARM (in)
Basic Mass	1275	-5
Seats 1 and 2	340	-2
Seats 3 and 4	170	30
Fuel 35 US Gallons (SG 0.72)		2
Oil 8 US quarts (SG 0.9)		-48
Baggage	45	70

Solution:

Lay out your solution in the same fashion as the load sheet;

Calculate fuel and oil mass using the density specified.

Fuel: $35 \div 1.2 \times .72 \times 10 = 210 \text{ lb}$ (US galls to pounds)

Oil : $8 \div 4 \div 1.2 \times .9 \times 10 = 15 \text{ lb}$ (US qts to pounds)

ITEM	MASS (lb)	ARM (in)	MOMENT
DOM	1275	-5	-6375
Seats 1 and 2	340	-2	-680
Seats 3 and 4	170	30	5100
Fuel 35 US Galls	210	2	420
Oil 8 US quarts 15	-48		-720
Baggage	45	70	3150
Take-off Mass	2055 lb	Take-off Moment	895

Take off CG = **0.435 inches aft of datum** (within limits)

To calculate landing CG

Fuel used in one and a half hours = $1.5 \times 7 \div 1.2 \times .72 \times 10 = 63 \text{ lbs}$

Oil used = $1.5 \times .25 \div 1.2 \times .9 \times 10 = 2.8 \text{ lbs}$

Landing mass = $2055 - 63 - 2.8 = \mathbf{1989.2 \text{ lbs}}$
 Landing moment = Take off moment - Fuel used moment - Oil used moment
 Landing moment = $+895 - (63 \times 2) - (2.8 \times -48)$
 Landing moment = $+895 - (126) - (-134)$ (minus and minus give plus) Landing
 moment = $+895 - 126 + 134$
 Landing moment = **+903**
 Landing CG = $\frac{+903}{1989.2}$
 = **+ 0.454 inches aft of datum** (within limits)

Note: Remember to check that the take-off mass and CG position and the landing mass and CG position are within the acceptable limits for the trip.

CG POSITION AS A PERCENTAGE OF MEAN AERODYNAMIC CHORD (MAC)

In the previous examples the CG position and CG limits are given as distances from a datum. An alternative method is to state the CG position and its limits as a percentage of the Mean Aerodynamic Chord (MAC). This is common practice with many swept wing airliners and it is so with the twin jet we shall be studying next.

The mean aerodynamic chord is one particular chord on the wing calculated from the aerodynamic characteristics of that particular wing. Because the CG affects many aerodynamic considerations, particularly stability, it is useful to know the CG position in relation to the aerodynamic forces.

The length of the MAC is constant and it is at a fixed distance from the datum. The CG is located at some point along the MAC and the distance of the CG from the leading edge of the MAC is given in percentage forms - CG position of 25% MAC would mean that the CG was positioned at one quarter of the length of the MAC measured from the leading edge.

The method of calculating the percentage of MAC is shown below.

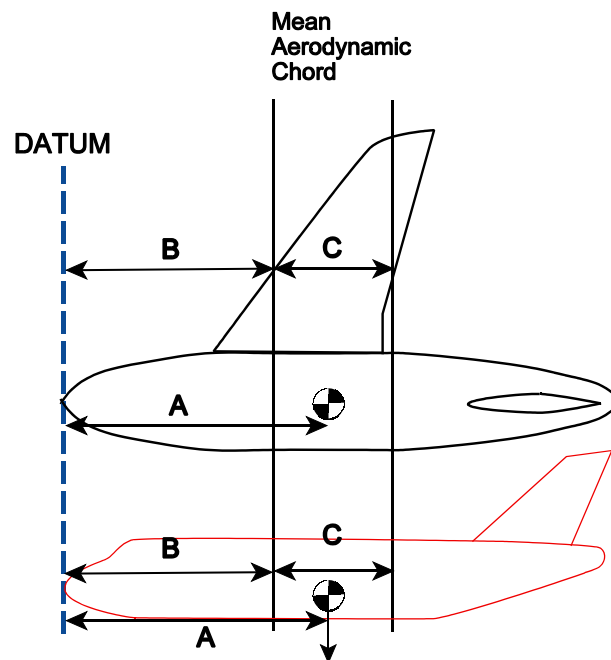



Figure 2.10

- A = distance of CG from datum.
 B = distance of MAC leading edge from datum.
 C = length of MAC.

$$\text{The CG as a percentage of MAC} = \frac{A - B}{C} \times 100$$

Example 4

If the MAC is 152 inc and its leading edge is 40 in aft of the datum, and the CG is 66 in aft of the datum, what is the CG position as a percent of MAC.

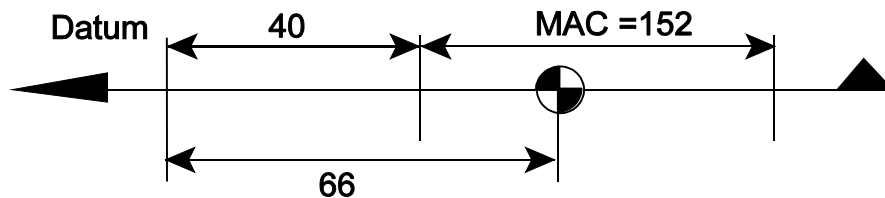

$$\frac{66 - 40}{152} \times 100 = 17.1\%$$

Now try these:-

1. An aircraft has a MAC of 82 inches. The leading edge of the MAC is 103 inches aft of the datum. If the CG position is 14.7% MAC, what is the CG distance from the datum.
2. If the CG position is 21% MAC, the MAC is 73 inches, and the CG datum is 26 inches aft of the leading edge of the MAC, what is the CG position relative to the datum.
3. The CG limits are from 5 inches forward to 7 inches aft of the datum. If the MAC is 41 inches and its leading edge is 15 inches forward of the datum, what are the CG limits as % MAC.
4. The MAC is 58 inches. The CG limits are from 26% to 43% MAC. If the CG is found to be at 45.5% MAC, how many inches is it out of limits.
5. An aircraft of mass 62500 kg has the leading and trailing edges of the MAC at body stations +16 and +19.5 respectively (stations are measured in metres). What is the arm of the CG if the CG is at 30% MAC?

RE-POSITIONING OF THE CENTRE OF GRAVITY

If the centre of gravity is found to be out of limits for any part of the flight, the aircraft must not take off until the load has been adjusted so as to bring the centre of gravity into limits.

This may be achieved in one of two ways:

- By re-positioning mass which is already on board the aircraft. This will usually be baggage or passengers.
- By adding or removing mass. Mass put on to the aircraft purely for the purpose of positioning or correcting the CG position is known as ballast.

The minimum mass to be moved, or the minimum amount of mass to be loaded or off-loaded, will be that which just brings the centre of gravity on to the nearest limit. It may be preferable of course to bring the CG further inside the limits. When the amount of mass adjustment has been calculated, it must be ascertained that this makes the aircraft safe for both take-off and landing.

RE-POSITIONING OF THE CENTRE OF GRAVITY BY REPOSITIONING MASS.

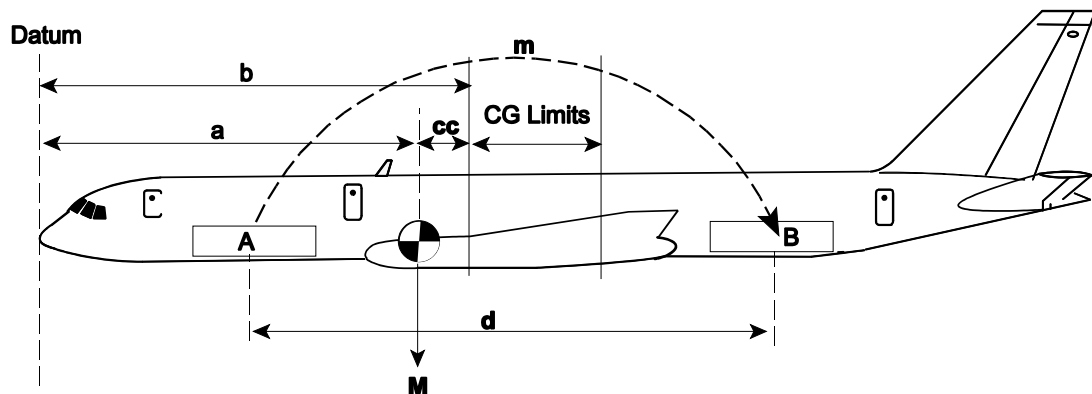


Figure 2.11 Repositioning Mass

In Figure 2.11 the centre of gravity has been found to be out of limits at a distance 'a' inches aft of the datum. The forward CG limit is 'b' inches aft of the datum. To bring the CG into limits, some baggage (**m**) will be moved from compartment A to compartment B.

If a mass of **m** lb is moved from A to B the change of moment will be

$$m \times d$$

That is, the change of moment is equal to the mass moved (**m**) multiplied by the distance through which it moves (**d**).

If the total mass of the aircraft is **M**, with the CG at 'a' inches aft of the datum, the total moment around the datum is **M x a**.

It is required to move the CG to (b) inches aft of the datum. The new total moment will then be $M \times b$.

The change in moment required is therefore $M \times b - M \times a = M(b - a)$ And $M(b - a) = m \times d$
 $b - a$ is equal to the change to the CG position 'cc'. and so $m \times d = M \times cc$

That is, the mass to move multiplied by the distance it moves is equal to the total aircraft mass multiplied by the distance the CG moves through.

Example 5

The CG limits of an aircraft are from -4 to +3 inches from the datum. It is loaded as shown below:

ITEM	MASS (lb)	ARM (in)	MOMENT (lb in)
Basic Empty Mass	2800	2	5600
Crew	340	-20	-6800
Fuel	600	10	6000
Forward Hold	0	-70	0
Aft Hold	150	80	12000
Total Mass =	3890	Total Moment =	16800

Therefore CG = $\frac{16800}{3890} = 4.32$ in

The Aft Limit is +3 and so the CG is 1.32 in out of limits (too far aft).

It can be corrected by moving some freight or baggage from the rear hold to the forward hold, a distance of 150 ins. (80 ins aft to 70 ins forward).

How much freight/baggage can be calculated by using our formula

$$\begin{aligned}
 m \times d &= M \times cc \\
 m \times 150 &= 3890 \times 1.32 \\
 m &= \frac{3890 \times 1.32}{150} \\
 \text{Mass of freight and/or} &= 34.232 \text{ lb} \\
 \text{baggage to move} &
 \end{aligned}$$

To check that the aircraft is safe for all fuel states after take off, we will calculate the CG at the Zero Fuel Mass with 35 lb of baggage moved to the forward hold.


ITEM	MASS (lb)	ARM (in)	MOMENT (lb in)
Basic Mass	2800	2	5600
Crew	340	-20	-6800
Fuel (Zero)	0		
Fwd. Hold	35	-70	-2450
Aft Hold	115	80	9200
ZFM =	3290	ZMF moment =	5550

$$\begin{aligned} \text{ZFM CG} &= \frac{5550}{3290} \\ &= 1.69 \text{ in (in Limits)} \end{aligned}$$

Now try these


- The CG limits of an aircraft are from 83 in. to 93 in. aft of the datum. The CG as loaded is found to be at 81 in. aft of the datum. The loaded mass is 3240 lb. How much mass must be moved from the forward hold, 25 in. aft of the datum, to the aft hold, 142 in. aft of the datum, to bring the CG onto the forward limit.
- An aircraft has a loaded mass of 5500 lb. The CG is 22 in. aft of the datum. A passenger, mass 150 lb, moves aft from row 1 to row 3 a distance of 70 in. What will be the new position of the CG. (All dimension aft of the datum)
- The loaded mass of an aircraft is 12 400 kg. The aft CG limit is 102 in. aft of the datum. If the CG as loaded is 104.5 in. aft of the datum, how many rows forward must two passengers move from the rear seat row (224 in. aft) to bring the CG on to the aft limit, if the seat pitch is 33 in. Assume a passenger mass of 75 kg each.
- An aircraft of mass 17400 kg, has its CG at station 122.2. The CG limits are 118 to 122. How much cargo must be moved from the rear hold at station 162 to the forward hold at station -100 (forward of the datum) to bring the CG to the mid position of its range?

5. With reference to Figure 1 how much load should be transferred from No. 2 hold to No. 1 hold in order to move the CG from the out-of-limits value of 5.5 m to the forward limit value of 4.8 m. The total mass of the aircraft is 13 600 kg.

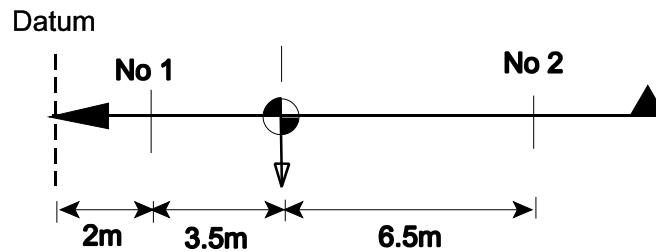

Moving Mass Figure 1

6. With reference to Figure 2 the loaded mass of the aircraft is found to be 1850 lb and the CG moment 154 000 lb in. How much mass must be moved from the forward hold 40 in. aft of the datum, to the rear hold, 158 in. aft of the datum, to bring the CG on to the forward limit.

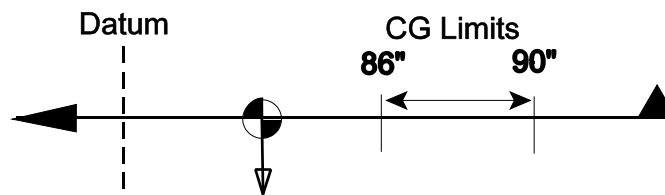

Moving Mass Figure 2

RE-POSITIONING OF THE CENTRE OF GRAVITY BY ADDING OR SUBTRACTING MASS

The position of the CG can also be adjusted by adding or subtracting mass. Mass added simply to re-position the CG is called **ballast**.

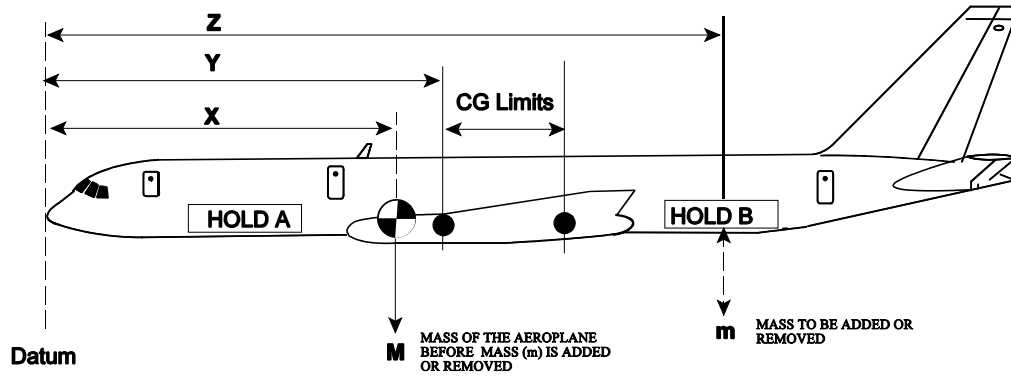


Figure 2.12 Adding or Removing Mass

To calculate the minimum amount of ballast required :

In Figure 2.12 the CG has been found to be out of limits at a distance 'X' ins aft of the datum. The forward CG limit is at a distance 'Y' ins aft of the datum. To bring the CG into limits, ballast will be put in compartment B, a distance 'Z' ins aft of the datum.

If the total mass of the aircraft is M lb., the total moment will be $M \times X$ lb in.

If ballast of m lb is placed in compartment B in order to move the CG to its fwd limit, the total mass will increase to $M + m$ and the new total moment will be $(M + m) \times Y$. Assuming equilibrium to be maintained, the original total moment plus the moment of the added mass must equal the new total moment.

Algebraically using the above notation then :-

$$(M + m) \times Y = (M \times X) + (m \times Z)$$

$$\text{New Total Moment} = \text{Old Total Moment} + \text{Cargo Moment}$$

The same formula can be used for **removing** mass by changing the plus sign to a minus. So, for any calculation involving **adding or subtracting** mass remember the formula:-

$$\text{New Total Moment} = \text{Old total moment plus or minus the cargo moment}$$

Note that when calculating a change in CG position using the New Moment = Old Moment \pm Change in Moment the distances (X, Y AND Z) are always measured from the datum itself.

We will do an example calculation together.

Example 6

The CG limits of an aircraft are from 84 ins to 96 ins aft of datum at all masses. It is loaded as shown below:

ITEM	MASS (lb)	ARM (in)	MOMENT (lb in)
Basic Mass	1250	80	10000
Crew	340	82	27880
Fuel	300	72	22500
Baggage	0	140	0
	1890		150380

$$CG = \frac{150380}{1890} = 79.6 \text{ ins aft of datum}$$

The CG is out of limits by 4.4 ins too far forward. It will be brought into limits by putting ballast in the baggage compartment. The minimum ballast would be that required to bring the CG to 84 ins.

Using our formula

$$\begin{aligned}
 \text{NTM} &= \text{OTM} + \text{CM} \\
 (1890 + m) \times 84 &= (1890 \times 79.6) + (m \times 140) \\
 158760 + 84 m &= 150444 + 140m \\
 158760 - 150444 &= 140 m - 84 m \\
 8316 &= 56 m \\
 \frac{8316}{56} &= m \\
 m &= 148.5
 \end{aligned}$$

Therefore mass of ballast required = 148.5 lbs

It would be necessary to check that loading the ballast did not cause the total mass to exceed the Maximum Take-Off Mass and as before, that the aircraft was in limits for landing.

Although this may appear to be a long winded method it will always provide the correct answer, remember you may be asked to calculate a mass to add or remove, a change to the CG or the position to put ballast.

Now try these adding or removing mass problems:

Question 1

An aircraft has three holds situated 10 in, 100 in and 250 in aft of the datum, identified as holds A, B and C respectively. The total aircraft mass is 3500 kg and the CG is 70 in aft of the datum. The CG limits are from 40 in to 70 in aft of the datum. How much load must be removed from hold C to ensure that the CG is positioned on the forward limit.

Question 2

An aircraft has a mass of 5000 lb and the CG is located at 80 in aft of the datum. The aft CG limit is at 80.5 in aft of the datum. What is the maximum mass that can be loaded into a hold situated 150 in aft of the datum without exceeding the limit.

Question 3

The loaded mass of an aircraft is 108560 lb and the CG position is 86.3 ft aft of the datum. The aft CG limit is 85.6 ft. How much ballast must be placed in a hold which is located at 42 ft aft of the datum to bring the CG onto the aft limit.

Question 4

The aft CG limit of an aircraft is 80 in aft of the datum. The loaded CG is found to be at 80.5 in aft of the datum. The mass is 6400 lb. How much mass must be removed from a hold situated 150 in. aft of the datum to bring the CG onto the aft limit.

Question 5

An aircraft has a mass of 7900 kg and the CG is located at 81.2 in aft of the datum. If a package of mass 250 kg was loaded in a hold situated 32 in aft of the datum. What would the new CG position be?

Question 6

The CG limits of an aircraft are from 72 in. to 77 in. aft of the datum. If the mass is 3700 kg and the CG position is 76.5 in. aft of the datum, what will the change to the CG position be if 60 kgs is removed from the fwd hold located at 147 in fwd of the datum.

Question 7

An aeroplane has a zero fuel mass of 47800 kg and a performance limited take-off mass of 62600 kg. The distances of the leading edge and trailing edge of the MAC from the datum are 16m and 19.5m respectively. What quantity of fuel in Imperial gallons, must be taken up to move the CG from 30% MAC to 23% MAC if the tank arm is 16m aft of the datum and the fuel SG is 0.72?

Answers shown on page 90

GRAPHICAL PRESENTATION

The aircraft mass and CG position are frequently calculated using one of a number of graphical methods. These notes give several examples of the graphs that may be used: see CAP 696 and this book pages 43 and 73. There are two things in common on any of the graphs used:

- The CG must be within the envelope or on the line of the envelope.
- The mass of the aeroplane is always shown on the vertical scale.

The example of a mass and CG envelope for the SEP 1, shown in CAP 696 Sect 2, SEP1 page 4, is unusual in that it uses both mass and moments on the vertical scale.

The horizontal scale may use the CG position (inches, metres or centimetres), the moment of the Cg (kg inches, kg metres or kg centimetres) or the percentage of the CG along the mean aerodynamic chord. The MEP 1, envelope shown in CAP 696, Section 3 - MEP1 page 3, is an example of using CG position and the MRJT envelope shown in CAP 696, Section 4 - MRJT, page 9, is an example of the use of the MAC percentage.

CARGO HANDLING

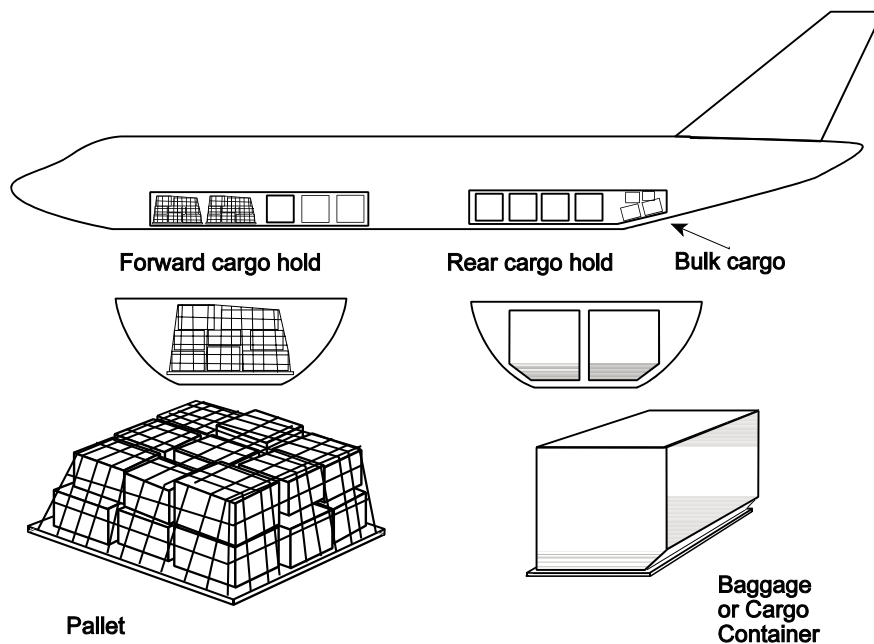


Figure 2.13 Cargo Handling

Cargo compartments

Compartments in the lower deck accommodate baggage and cargo. The compartments feature fire resistant sidewalls, ceilings and walkways. Cargo compartments are usually pressurised and heated and typically have fire detection and protection equipment. Cargo compartments usually have a maximum floor loading (kg/m²) and maximum running load value (kg/m).

Containerised cargo

Baggage and cargo can be loaded into standard size containers designed to fit and lock into the cargo compartment. The containers have an individual maximum mass limit and an individual floor loading limit (mass per unit area).

Palletised cargo

Cargo can also be loaded onto standard sized pallets and restrained with cargo nets or strops. Typically the forward area of the forward cargo compartment is configured to take palletised freight.

Bulk cargo

Bulk cargo can be loosely loaded in the area at the aft of the rear cargo compartment and separated from the containers by a restraining net attached to the floor ceiling and sidewalls.

Cargo Handling Systems.

The forward and aft cargo compartments typically have separate cargo power drive systems to move containers and cargo pallets.

The power drive system is operated by a control panel at the door area of each cargo compartment and is capable of loading and unloading fully loaded containers or pallets in wet or dry conditions. A typical panel is shown below.

Power drive units (PDU) are mounted in the floor and are controlled by the control joystick to move containers laterally and longitudinally in the doorway area and longitudinally in the compartment forward and aft of the doorway.

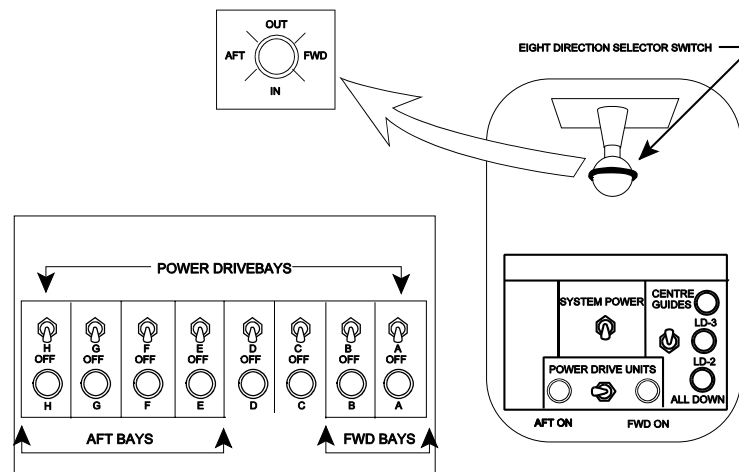


Figure 2.14 Cargo bay Control Panel

Guides, rollers, stops, locks and tie down fittings are included in the appropriate places to provide adequate 'G' restraint for the containers in flight.

FLOOR LOADING

The floors of the passenger cabin and the freight areas of the aircraft are limited in the load that they can carry. Placing excessive loads on the structure may not only cause visible panel creasing and local indentations but is likely to significantly accelerate structural fatigue. Fatigue is cumulative and can lead to major structural collapse of the structure with little or no warning.

The floor loading is defined both by linear loading and by area loading intensity

LINEAR / RUNNING LOADS

The linear (or running) loading limitation (lb per linear foot or kg per linear inch) protects the aircraft under floor frames from excessive loads. Depending on the units used, it is the total load permitted in any one inch or one foot length of the aircraft (irrespective of load width).

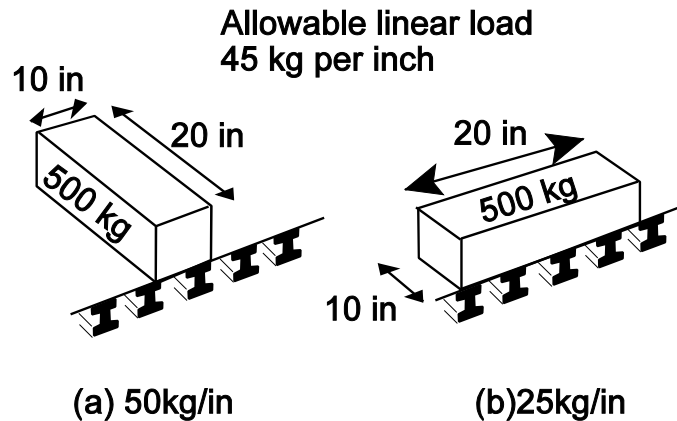


Figure 2.15 Linear Loading

Calculating the linear load distribution

As can be seen at Figure 2.14 (a), the linear load on the floor members is 500 kg divided by the 10 inch length i.e. 50 kg/inch; which is greater than the 45 kg/in allowed. However, the way in which an item of load is located in an aircraft can create an acceptable situation out of an unacceptable one.

In example (b), by simply rotating the load through 90° the linear load on the floor members becomes 500 kg/20 inches i.e. 25 kg/in: which is well within the limit. It can be seen that the least linear loading occurs when the longest length is placed at right angles to the floor beams.

AREA LOAD LIMITATIONS

Area load limitations (kg/sq metre or lb/sq ft) protect the aircraft floor panels. The two permissible intensities of pressure are “Uniformly Distributed” (UD) and “Concentrated” loads.

UD loads

The general floor loading limitations for cargo are referred to as UD loads and are given as allowable lb/sq ft. Providing that a load (or series of loads) is within the allowable UD limitations for the floor area on which it rests, the loading is subject only to :

- not exceeding the linear load limitations.
- the individual and accumulated compartment load limitations.

Concentrated loads

Load intensities which exceed the UD load intensities “concentrated loads”, can be carried providing approved load spreaders are used to distribute the load over sufficient area to ensure that loading limits are not exceeded.

Load spreaders

When concentrated loads or items of load with hard or sharp areas are carried on an aircraft, some form of floor protection is essential. The normal practice is to employ standard load spreaders of 2 inch thick timber.

An example of load intensity and running load for you to do:

An item of cargo has dimensions 3 ft x 4 ft x 12 ft and weighs 900 kg. Given that the maximum running load for the compartment is 20 kg/in and the maximum load intensity for the compartment is 70 kg/ft² what are the running load values and the floor intensity values for the cargo and are there any limitations in the way in which it may be carried?
(1 ft = 12 inches)

Considering the RUNNING LOAD (underfloor protection) first:

Max running load	=	Load/ shortest length	
Mid running load	=	Load / mid length	
Min running load	=	Load / longest length	
Max running load	=	$\frac{900 \text{ kg}}{(3\text{ft} \times 12\text{inches}/\text{ft})}$	= 25 kg/in) Max = 20 kg/in) Exceeds limit
Mid running load	=	$\frac{900 \text{ kg}}{(4\text{ft} \times 12 \text{ inches}/\text{ft})}$	= 18.75 kg/in) OK) Below limit
Min running load	=	$\frac{900 \text{ kg}}{(12\text{ft} \times 12 \text{ inches}/\text{ft})}$	= 6.25 kg/in) OK) Below limit

Now considering the DISTRIBUTION LOAD INTENSITY (Floor protection)

Max distribution load on the floor	=	Load / smallest area	
Mid distribution load on the floor	=	Load / medium area	
Min distribution load on the floor	=	Load / largest area	
Max dl	=	$\frac{900 \text{ kg}}{3 \text{ ft} \times 4 \text{ ft}} = \frac{900 \text{ kg}}{12 \text{ ft}^2}$	= 75 kg/ft ²) Max = 70 kg/ft ²) Exceeds limit
Mid dl	=	$\frac{900 \text{ kg}}{3 \text{ ft} \times 12 \text{ ft}} = \frac{900 \text{ kg}}{36 \text{ ft}^2}$	= 25 kg/ft ²) OK) Below limit
Min dl	=	$\frac{900 \text{ kg}}{4 \text{ ft} \times 12 \text{ ft}} = \frac{900 \text{ kg}}{48 \text{ ft}^2}$	= 18.75 kg/ft ²) OK) Below limit

The cargo can be carried providing it is placed on the cargo-bay floor on either its medium area or largest area to prevent floor damage and that either the 4 feet length or the 12 feet length is placed parallel to the longitudinal axis of the aeroplane to prevent under-floor damage (spreading the load across the under floor frames).

SINGLE ENGINE PISTON/ PROPELLER AIRCRAFT (SEP 1)

The procedure for compiling the documentation for the single engine piston/propeller aircraft (SEP1) given in CAP 696 is similar to the calculations previously specified in these notes, but notice that the load manifest and CG envelope are specific to that type of aircraft.

A number of examples are included in the question section, starting on at page 75.

LIGHT TWIN PISTON/PROPELLER AIRCRAFT (MEP 1)

The procedure for compiling the documentation for the twin engine aircraft (MEP1) given in CAP 696 is also similar to the procedures defined in these note, but notice that the load manifest and CG envelope are specific to that type of aircraft.

A sample calculation based on compiling the load sheet for that aircraft is shown in CAP 696, MEP1, page 2. CAP 696, MEP page 1, contains specific information based on the MAss & Balance requirements for that particular aircraft.

These pages should be studied by the student after which the following self assessment questions should be attempted.

A number of examples are included in the question section, starting on at page 75.

MEDIUM RANGE JET TWIN (MRJT 1)

The MRJT (Medium Range Twin Jet) has a more complex loading and trim sheet which we shall deal with shortly.

CAP 696, MRJT, pages 2 - 5, contain information specific to the MRJT and should be studied in detail. Notes on particular items follow.

MRJT Figure 4.1 and 4.2 Body Station

Though it would be possible to locate components and parts of the airframe structure by actually measuring their distance from the CG datum, it would be difficult and impractical on anything other than a very small aircraft. Instead, aircraft are divided about their three axes by a system of station numbers, water lines and buttock lines. The system of structural identification is not part of this subject except to say that in the past, station numbers were used as balance arms about the datum for first-of-kind aircraft. However, new variants of original series aircraft are often made by inserting additional lengths of fuselage and consequently, the distances of components and structure from the original datum undergo a change. The station numbers could all be re- numbered to enable them to retain their use as balance arms but it is often more beneficial to retain the original station numbers as they are. This means that on some variant aircraft they can no longer be used as balance arms for CG purposes and in order to find out how far a particular station is from the datum a conversion chart is required.

An example of such a chart is given in CAP 696, Section 4, MRJT, Page 1.

Figure 4.1 of the JAR Loading Manual shows a fuselage side view which includes the balance arms about the datum. The table at Figure 4.2 shows how the station numbers for the aircraft can be converted into balance arms and vice versa. An examination of the table will show that this aircraft is a variant of a previous series aircraft in that two fuselage sections 500A to 500G and 727A to 727G have been inserted. This is the reason the balance arms and the station numbers are not coincidental and why the conversion chart is required. Notice from the chart that the centre section of the airframe (stations 540 to 727) which is the same as the original aircraft, has retained its original station numbers and they are coincidental with the balance arms.

Here are two examples of how to use the chart:

- Convert body station 500E into a balance arm.
Body station 500E = 348 + 110 = Balance arm 458 inches.
- Convert balance arm 809 inches into a station number.
Balance arm 809 – 82 = Station number 727

Further examination of the chart shows that balance arm 809 is actually station number 727D.

Now try these:

1. What is the station number at the nose of the aircraft?
2. What is the station number 1365 inches from the datum?
3. What is the distance of station 500 from the datum?
4. What is the distance of station 727C from the datum?

MRJT Figure 4.3 and 4.4 Flap Position

The movement of the flaps on a large aircraft may have a considerable effect on the CG position. table 4.3 shows the moment change to the aircraft when the flaps are extended or retracted,. for example retracting the flaps from 30° to 0° would cause a total moment change of minus 15,000 kg.inches. Conversely extension of the flaps from 0° to 40° would cause a total moment change of plus 16,000 kg. inches.

The stabiliser setting for take off is extracted from the graph at Figure 4.4. The purpose of this is to allow the stabiliser trim to be set to allow the elevator sufficient authority to enable the aircraft to be rotated during the take off run and controlled during the first stages of flight. The position of the CG will determine the stabiliser setting for take off.

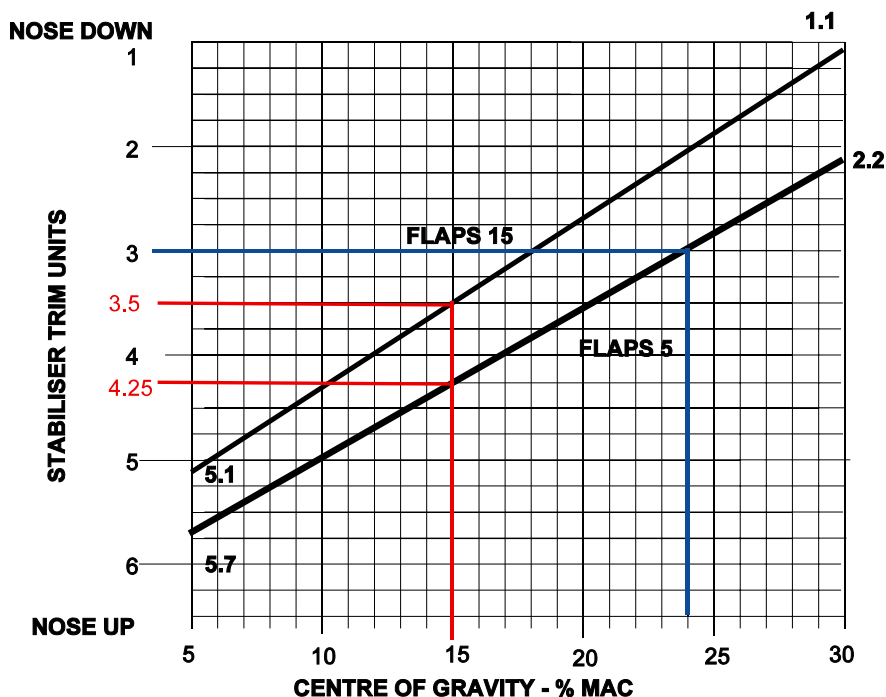


Figure 2.16 Stabiliser Trim Setting

Example 1.

What is the stabiliser trim setting if the CG is 15 % MAC and the flaps are moved from the 5° to the 15° position?

From the graph, if the CG is 15% MAC and the flap setting is 5° then the stabiliser trim setting will be 4.25 units nose up.

If the CG was the same 15% MAC with a flap setting of 15° then the stabiliser trim setting would be 3.5 units nose up.

Example 2.

If, as a result of the traffic and fuel load, the CG moved from 15% MAC to 24% MAC what would be the change in stabiliser trim?

From the graph, the stabiliser trim for 5 degrees take-off flap would change from 4.25 trim units at 15% MAC to 3 trim units at 24% MAC.

Note: To enable the pilot to correctly set the stabiliser trim for take off there will be a trim indicator on the instrument panel or as an integrated part of an electronic display unit.

MRJT Figure 4.9 Cargo Compartment Limitation (CAP 696, MRJT, Page 5)

These tables detail the cargo compartment limitations which must be considered when items of cargo are loaded to ensure that the limitations are not exceeded.

Running Load

The running load is the fore/aft linear load. For example a box having dimensions of 3 feet by 3 feet by 3 feet and weighing 100 kg would have a running load of $100 \div 3 = 33.3$ kg per **foot** which would be equal to $33.3 \div 12 = 2.78$ kg per **inch**. Be very careful to use the correct units (don't forget that there is a conversion chart on page 4 of the data sheets)

However if a box having the same weight was 3ft x 2ft x 3ft then it could be positioned so that the 2ft side was running fore/aft in which case the running load would be:

$$100 \div 2 \div 12 = 4.16 \text{ kg per inch}$$

The cargo may have to be orientated correctly to prevent exceeding the running load limitations.

Area Load

The first box would have a load intensity (mass per unit area) of $100 \div 9 = 11.1$ kg per square foot as the area it would be standing on would be $3 \times 3 = 9$ square feet.

The second box however could be placed on its side measuring $2\text{ft} \times 3\text{ft} = 6$ square feet area, it would therefore have a load intensity of $100 \div 6 = 16.66$ kg per sq.ft

The cargo may have to be orientated correctly to prevent exceeding the distribution load limitations.

CALCULATIONS (MRJT)**Calculating the Underload using the formulae**

The captain of the aircraft needs to know if he is able to accommodate any additional last minute changes to the load i.e. VIP's, emergency evacuation etc. Before the captain can allow any last minute additions to the load he must know if he has any spare load capacity or **underload** as it is referred to. Unfortunately, the underload is not simply the difference between the regulated take-off mass and the actual take-off mass, the MZFM and the Traffic Load have to be considered.

Clearly, if the aircraft is already at its MZFM it has no underload. Even if it is below the MZFM, any underload may have already been consumed by extra fuel uptake.

Any last minute load additions that are allowed will increase the size of the Traffic Load. The Traffic Load that can be carried is the lowest value of the Structural Traffic Load, the Take-off Traffic Load and the Landing Traffic Load.

The allowed traffic load is the lowest of the following (you are required to know these formulas):

- **Structural Limited Traffic Load** = MZFM – DOM
- **Take-off Limited Traffic Load** = RTOM – DOM – Take-off fuel
- **Landing Limited Traffic Load** = RLM – DOM – Fuel remaining

In the case of the MRJT aircraft, if the DOM = 34300 kg, the take off fuel = 12000 kg and the fuel remaining at landing = 4000 kg:

$$\text{Structural Limited Traffic Load} = 51300 - 34300 = 17000 \text{ kg}$$

$$\text{Take-off Limited Traffic Load} = 62800 - 34300 - 12000 = 16500 \text{ kg}$$

$$\text{Landing Limited Traffic Load} = 54900 - 34300 - 4000 = 16600 \text{ kg}$$

The allowed Traffic load is thus 16,500 kg. But if the actual traffic load was only 16,000 kg there would be a 500 kg underload.

You are required to know how to determine the allowable traffic load using the formulae above.

Fuel Load Definitions

Students need to have a basic knowledge of the fuel load definitions before they attempt traffic load calculations.

- **Start and Taxi Fuel:**
The mass of fuel used in starting and operating the APU and the main engines and in taxiing to the runway threshold for take off. It is assumed that at the point of releasing the brakes for take-off the aircraft is at or below the regulated take-off mass for the conditions prevailing. In operations where fuel is critical the start and taxi fuel must not be less than the amount expected to be consumed during the start and taxi procedures.
- **Trip Fuel :**
This is the mass of fuel required to complete the take-off run, the climb, the cruise, the descent, the expected arrival procedures, the approach and landing at the designated airport.
- **Contingency Fuel :**
Fuel carried in addition to the trip fuel for unforeseen eventualities such as avoiding bad weather or having an extended hold duration at the destination airport. the contingency fuel in calculations is usually given as a percentage of the trip fuel i.e. if the trip fuel is 1000 kg mass the contingency fuel at 5% of the trip fuel would be 50 kg. Don't forget that the contingency fuel is part of the landing mass if it is not actually used during the trip.
- **Alternate (Diversion) Fuel :**
That mass of fuel required to carry out a missed approach at the destination airfield, the subsequent climb out, transit to, expected arrival procedures, approach, descent and landing at an alternate airfield.
- **Final Reserve Fuel :**
The minimum fuel that should be in the tanks on landing. Essentially it is a final reserve for unplanned eventualities and should allow a piston engine aircraft to fly for a further 45 minutes or a jet engine aeroplane to fly for a further 30 minutes at a given height and holding speed.
- **Additional Fuel :**
Only required if the sum of the trip, contingency, alternate and final reserve fuels are insufficient to cover the requirements of AMC OPS 1.255 (Instrument landings and power unit failures which not required for calculations).

The take-off fuel for calculations is simply the sum of the above, excluding the Start and Taxi fuel.

Note that the fuel state requirements vary with the intended flight plan and they are not always required.

The landing fuel mass is the actual amount of fuel remaining in the tanks at touch down. In a trip where no eventualities have occurred it will include the contingency, alternate, final reserve and additional fuel masses if they were included in the flight plan.

Calculating the Underload using the Load and Trim Sheet

The Load and Trim Sheet used for the MRJT automatically calculates the underload but does it using a slightly different method than that shown above. Instead of determining the lowest traffic load the Load and Trim sheet first determines the allowable Take-off Mass. It then calculates the allowable Traffic Load by deducting the Operating Mass from the allowable Take-off Mass. Finally, it calculates the underload by deducting the actual Traffic Load from the allowable Traffic Load.

The allowable Take-off Mass is the lowest of:

- **MZFM + Take-off Fuel**
- **Regulated Take-off Mass**
- **Regulated Landing Mass + Fuel used in flight**

For example. In the case of the MRJT, the MZFM is given as 51300 kg, the MTOM is 62800 kg and the MLM is 54900 kg. Let us assume that there are no Performance Limits so that the Regulated Take-off and Landing masses are equal to the Structural Limited Take-off Mass and the Structural Limited Land Mass respectively. Let us also assume that the DOM is 34,000 kg, that the actual traffic load is 12,400kg, the take off fuel load is 16,000 kg and 8,000 kg of fuel was used in flight.

Allowable Take-off mass is the lowest of:

- MZFM + Take-off Fuel
51,300 kg + 16,000 kg = 67,300 kg
- Regulated Take-off Mass
62,800 kg = 62,800 kg
- Regulated Landing Mass + Estimated fuel consumption
54,900 kg + 8,000 kg = 62,900 kg

The maximum allowable Traffic Load for the conditions prevailing can now be determined by subtracting the Operating Mass from the Regulated Take-off Mass i.e. :

$$\begin{aligned}
 \text{Maximum Traffic Load} &= \text{Regulated Take-off Mass} - \text{Operating Mass} \\
 &= 62,800 \text{ kg} - (34,000 \text{ kg} + 16,000 \text{ kg}) \\
 &= 12,800 \text{ kg}
 \end{aligned}$$

The underload can now be determined by subtracting the actual traffic load from the maximum allowable traffic load.

$$\begin{aligned}
 \text{Underload} &= \text{maximum traffic load} - \text{actual traffic load} \\
 &= 12,800 \text{ kg} - 12,400 \text{ kg} \\
 &= 400 \text{ kg}
 \end{aligned}$$

Fortunately, the MRJT Load and Trim Sheet makes easy work of the above calculations and you are advised to practice using the Load and Trim Sheet.

Example calculations.

Calculations may be carried out using the Loading Manifest (data sheet Figure 4.10) and CG limits envelope (Figure 4.11) or the Load and Trim sheet (Figure 4.12).

We will do a sample calculation using both methods.

Using the following values complete the Loading Manifest Figure 4.10 and check the limiting values with the CG envelope.

DOM	34,300 kg 15% MAC
PAX	Total 116, standard weight 84 kg each 10 each in zone A and G 12 each in zone B and F 24 each in zone C, D and E
CARGO	600 kg hold 1 1,500 kg hold 4 (includes checked baggage)
FUEL	15,000kg at take off 260 kg start and taxi 10,000 kg trip fuel

Use the CAP 696, MRJT, data sheets where required to find the balance arm for the MAC and vice-versa. The moment/1000 is calculated from the arm/1000. The balance arm is calculated by dividing the total moment by the total weight. The fuel balance arm and quantity in each tank is also found from the data sheets.

Note: that the centre fuel tank content is used before the wing tank fuel content and that the centre tank includes 24 kg of unusable fuel.

As a start, if the DOM CG position is 15% MAC, then that is 15% of 134.5 inches (CAP 696, MRJT, Page 2) or 20.175 inches. That makes the CG balance arm $20.175 + 625.6 = 645.8$ inches aft of the datum The fuel load balance arm can be extracted from Figure 4.5 and 4.6 of the loading manual, for example the maximum contents of tanks one and two is 9084 kg with a balance arm of 650.7. Fill in this blank sheet using the above information then check the aircraft has not exceeded any of the limits in the CG envelope

See if your answer agrees with mine! (I have estimated changes to the fuel tank CG position and accounted for the unusable fuel in the centre tank. However, the fuel CG position will be fixed and there will be no unusable fuel to account for in JAR exams)

If you wish to check the mass values and CG positions using the load and trim sheet for the MRJT use a DOI of 40.5.

Maximum Permissible Aeroplane Mass Values

TAXI MASS

ZERO FUEL MASS

TAKE-OFF MASS

LANDING MASS

ITEM	MASS (KG)	B.A. In	MOMENT KG-IN/1000	CG % MAC
1. DOM	34300	645.8	22150.9	15%
2. PAX Zone A		284		-
3. PAX Zone B		386		-
4. PAX Zone C		505		-
5. PAX Zone D		641		-
6. PAX Zone E		777		-
7. PAX Zone F		896		-
8. PAX Zone G		998		-
9. CARGO HOLD 1		367.9		-
10. CARGO HOLD 4		884.5		-
11. ADDITIONAL ITEMS				-
ZERO FUEL MASS				
12. FUEL TANKS 1&2				
13. CENTRE TANK				
TAXI MASS				
LESS TAXI FUEL				
TAKE OFF MASS				
LESS FLIGHT FUEL				
EST. LANDING MASS				

Figure 2.17 LOADING MANIFEST - MRJT 1

Maximum Permissible Aeroplane Mass Values

TAXI MASS	63060kg	ZERO FUEL MASS	51300kg
TAKE-OFF MASS	62800kg	LANDING MASS	54900kg

ITEM	MASS (KG)	B.A. In	MOMENT KG-IN/1000	CG % MAC
1. DOM	34300	645.8	22150.9	15%
2. PAX Zone A	840	284	238.5	-
3. PAX Zone B	1008	386	389	-
4. PAX Zone C	2016	505	1018	-
5. PAX Zone D	2016	641	1292	-
6. PAX Zone E	2016	777	1566	-
7. PAX Zone F	1008	896	903	-
8. PAX Zone G	840	998	838	-
9. CARGO HOLD 1	600	367.9	221	-
10. CARGO HOLD 4	1500	884.5	1327	-
11. ADDITIONAL ITEMS				-
ZERO FUEL MASS	46144	649	29943.4	17.4%
12. FUEL TANKS 1&2	9084	650.7	5911	-
13. CENTRE TANK	6176	600.4	3708	-
TAXI MASS	61404	644.3	39562.4	-
LESS TAXI FUEL (C/TANK)	-260	600.5	-156	-
TAKE OFF MASS	61144	644.5	39406.4	14%
LESS CENTRE TANK FUEL	-5892	600.9	-3540.5	-
LESS MAIN TANK FUEL	-4108	628	-2580	
EST. LANDING MASS	51144	651	33286	18.9%

Note: the fuel CG positions have been estimated for simplicity and allowance has been made for the 24 kg of unusable fuel in the centre tank. However, it is most unlikely that you will not be required to adjust for fuel tank CG changes or to account for unusable fuel quantities in JAR exams.

Figure 2.18 LOADING MANIFEST - MRJT 1 (Table 3)

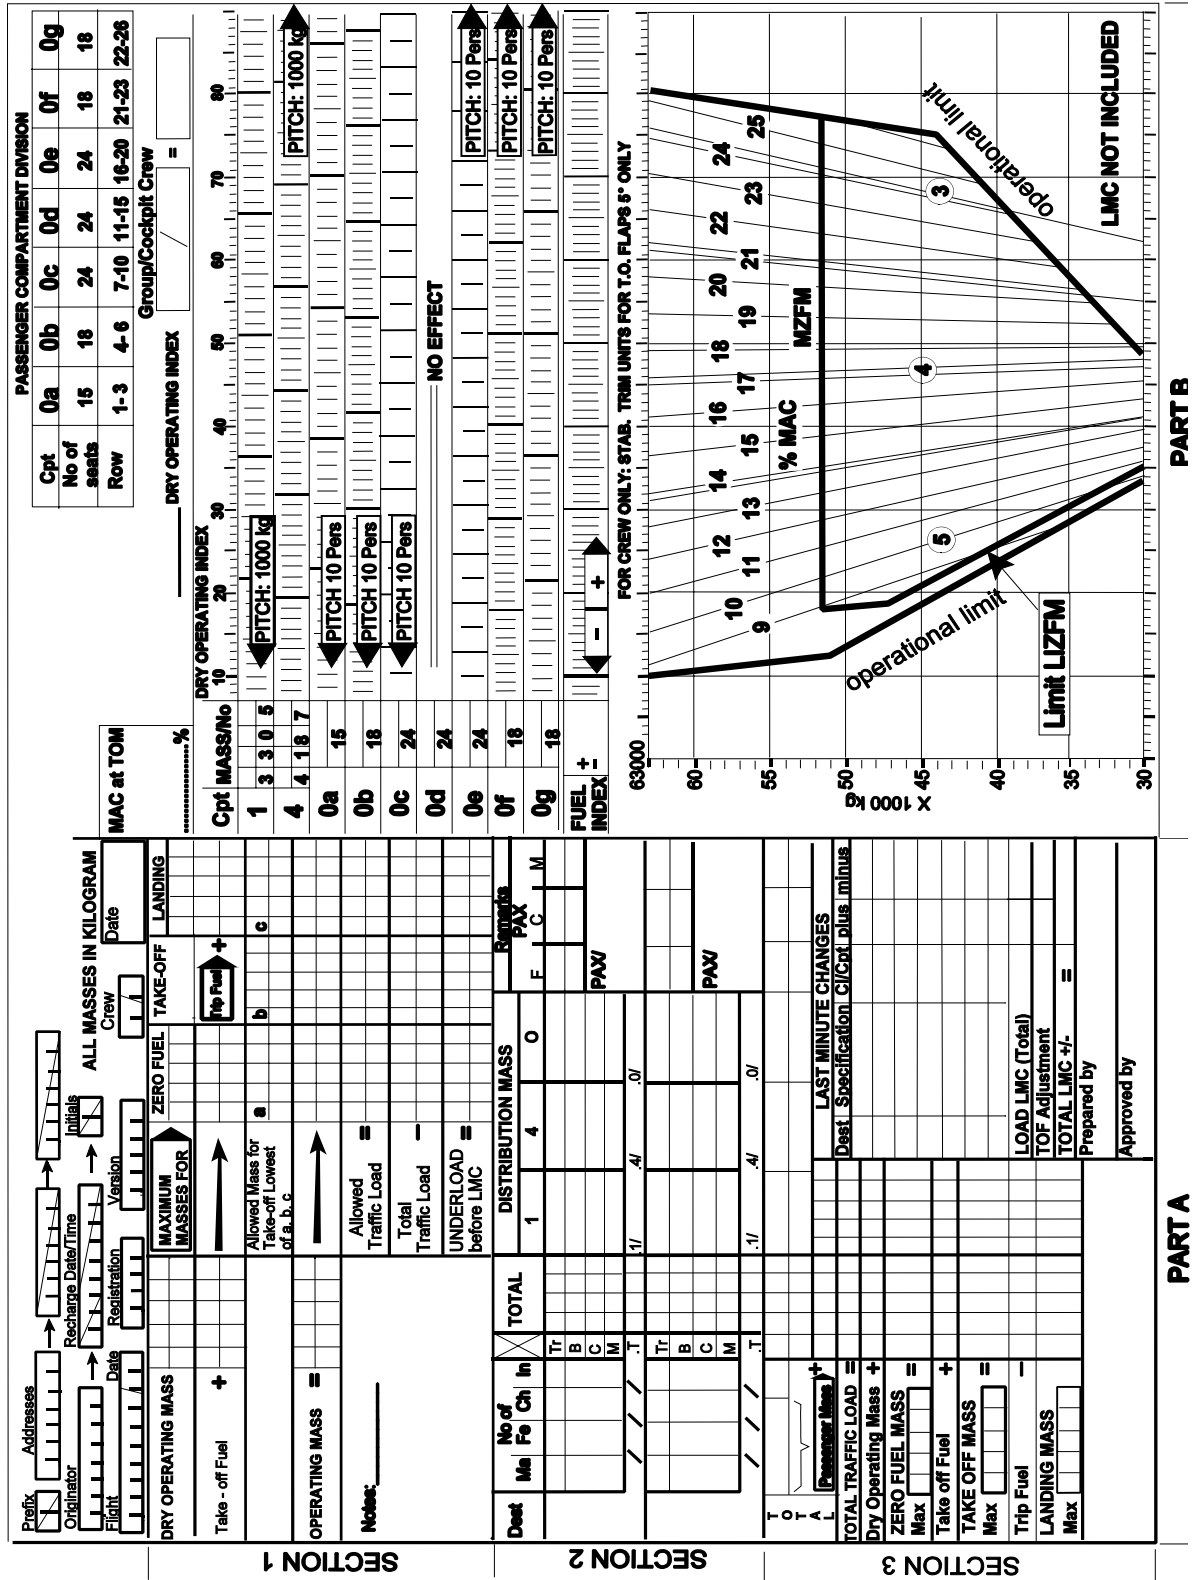


Figure 2.19 MRJT - Load and Trim Sheet

LOAD AND TRIM SHEET MRJT

Figure 2.18 shows a combined Load and Trim sheet for a modern twin jet airliner designated JAA - Medium Range Jet Twin (MRJT). See CAP 696, MRJT1, Page 9, of the Loading Manual. (Students may be required to complete a part of the load and trim sheet during the JAA exams).

The left hand side of the page (part A) is the loading document which itemises the mass and mass distribution within the aeroplane i.e. dry operating mass, traffic load and fuel load. The right hand side (part B) indicates how each mass in turn subsequently affects the position of the C G in relation to the mean aerodynamic chord. The ZFM and the TOM must be within the relevant area of the graph envelope on completion of the mass calculations otherwise the aircraft is unsafe to fly.

Part A (loading summary) should be completed as follows:-

Section 1 is used to establish the limiting take off mass, maximum allowable traffic load and underload before last minute changes (LMC)

Section 2 Shows the distribution of the traffic load using the following abbreviations.

TR	Transit
B	Baggage
C	Cargo
M	Mail
Pax	Passengers
Pax F	First Class
Pax C	Club/Business
Pax Y	Economy

Section 3 Summarises the loading and is used to cross check that limiting values have not been exceeded.

Part B is the distribution and trim portion. The lower part is the CG envelope graph. The vertical scale of which is given in terms of mass and the horizontal axis scale in terms of MAC.

- Using data from the loading summary enter the Dry Operating Index (DOI) for the DOM.
- Move the index vertically downwards into the centre of the first row of horizontal boxes. **Note** that each box within the row has a pitch which represents either a defined mass or a number of persons. There is also an arrow indicating the direction in which the pitch is to be read.
- Move the index horizontally in the direction of the arrow to a pitch value corresponding to the value in the Mass/No box immediately to the left of the row.
- Repeat operations 1 to 3 above for each subsequent row of boxes down to and including row Og. After completing the index calculation for row Og drop a line vertically down until it bisects a mass on the vertical scale of the envelope corresponding to the Zero Fuel Mass. The point of bisection must occur within the MZFM envelope.
- Go to the horizontal row of boxes marked 'Fuel index' and add the take-off fuel index.

- After completing the fuel index calculation drop a line vertically down from it until it bisects a mass on the vertical scale of the envelope corresponding to the Take-Off Fuel Mass. The point of bisection must occur within the TOM envelope.
- Providing the ZFM and the TOM are within the envelope as described above, the aircraft is safe for the intended flight - including any permitted diversions.

Example:

The following example deals with part A and part B of the load sheet separately using the data shown.

DOM	=	34,300 kg
DOI	=	45.0
RTOM	=	62,800 kg
MZFM	=	51,300 kg
RLM	=	54,900 kg
Passengers	130	(Average mass 84 kg)
Baggage	130	(@14 kg per piece)
Cargo	630 kg	
Take off fuel	14,500kg	
Trip Fuel	8,500 kg	

Limitations for JAA - Medium Range Twin Jet

Maximum Structural Taxi Mass	63,050 kg
Maximum Structural Take Off Mass	62,800 kg
Maximum Structural Landing Mass	54,900 kg
Maximum Structural Zero Fuel Mass	51,300 kg
Maximum Number of Passengers	141

Cargo

Hold 1 Max Volume	607 cu.ft
Max Load	3,305 kg
Hold 2 Max Volume	766 cu.ft
Max Load	4,187 kg

Standard Crew (Allowed for in DOM)

Flight Deck	2
Cabin Crew forward	2
aft	1

Section 1 of the load sheet is completed first in order to find the three potential take off masses (a, b and c). The value at (a) is the take-off mass you would achieve if you loaded the aeroplane to the MZFM and then added your intended fuel load. The value at (b) is the Regulated take-off mass for the takeoff airfield conditions as existing and the value at (c) is the take-off mass you would achieve if you were to land at the Regulated landing mass and then added back the mass of the trip fuel. The lowest of (a), (b) and (c) is the limiting take-off mass for traffic load calculations.

The maximum allowable traffic load for the trip can be determined by subtracting the operating mass from the limiting take-off mass. Subsequently, any underload can be calculated by subtracting the actual traffic load from the allowable traffic load (14,000 - 13,370 = 630). The underload sets the limiting mass for any last minute changes (LMC). Sections 2 and 3 of the load sheet detail the mass and distribution of the traffic load and give actual values of take-off and landing masses.

Prefix		Addresses		Recharge Date/Time		Initials		ALL MASSES IN KILOGRAM						
Originator		Flight		Date		Registration		Version		Crew		Date		
DRY OPERATING MASS		34300		MAXIMUM MASSES FOR		ZERO FUEL		TAKE-OFF		LANDING				
Take-off Fuel +		14500		→		51300		→		54900				
				Allowed Mass for Take-off Lowest of a, b, c		a		b		c				
OPERATING MASS =		48800		→		65800		62800		63400				
Notes:				Allowed Traffic Load =				14000						
				Total Traffic Load -				13370						
				UNDERLOAD before LMC =				630						
Dest	Ma	No of	Fe	Ch	In	TOTAL	DISTRIBUTION MASS			Remarks				
							1	4	0	F	C	M		
	130					1820	600	1220	10920					
						630		630					PAX/	
	/	/	/		.T		.1/ 600	.4/ 1850	.0/ 10920					
													PAX/	
							.1/	.4/	.0/					
TOTAL	130					2450								
	Passenger Mass +					10920				LAST MINUTE CHANGES				
TOTAL TRAFFIC LOAD =						13370				Dest	Specification	Cl/Cpt	plus	minus
Dry Operating Mass +						34300								
ZERO FUEL MASS														
Max 51300 =						47670								
Take off Fuel +						14500								
TAKE OFF MASS														
Max 62800 =						62170								
Trip Fuel -						8500								
LANDING MASS														
Max 54900						53670								
										LOAD LMC (Total)				
										TOF Adjustment				
										TOTAL LMC +/- =				
										Prepared by				
										Approved by				

Figure 2.20 Completed Trim Sheet

In part B the graph is entered at the top by drawing a vertical line from the DOM index of 45 into the row for cargo compartment 1. This row is split into sections by heavy lines representing 1000kg, each section is split again into 10, each line representing 100 kg. the arrow in the box represents the direction to move to adjust for that mass.

Follow the same procedure for each cargo compartment or seating compartment until have adjusted for all of the traffic load. Before adjusting for the fuel load draw the line down to intersect with the zero fuel mass to identify the ZFM CG position. Then adjust for the fuel index taken from the data sheets, page 30, and draw the line vertically down to identify the take-off CG position.

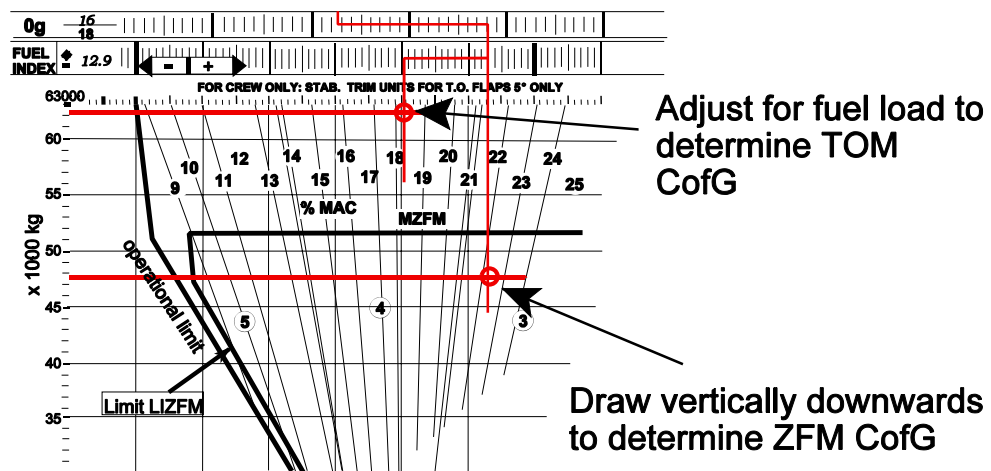
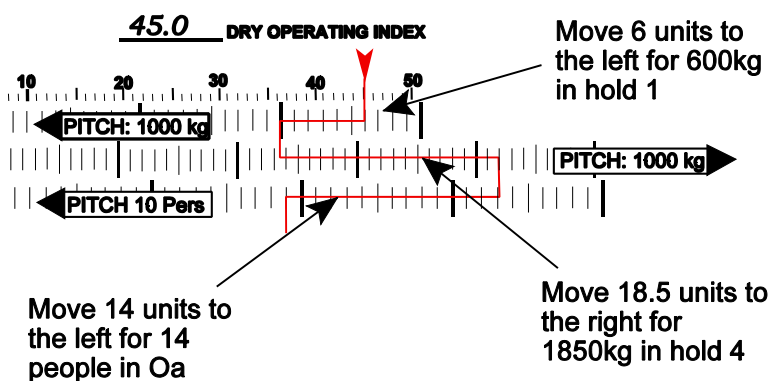


Figure 2.21 Load and trim Calculation Diagrams

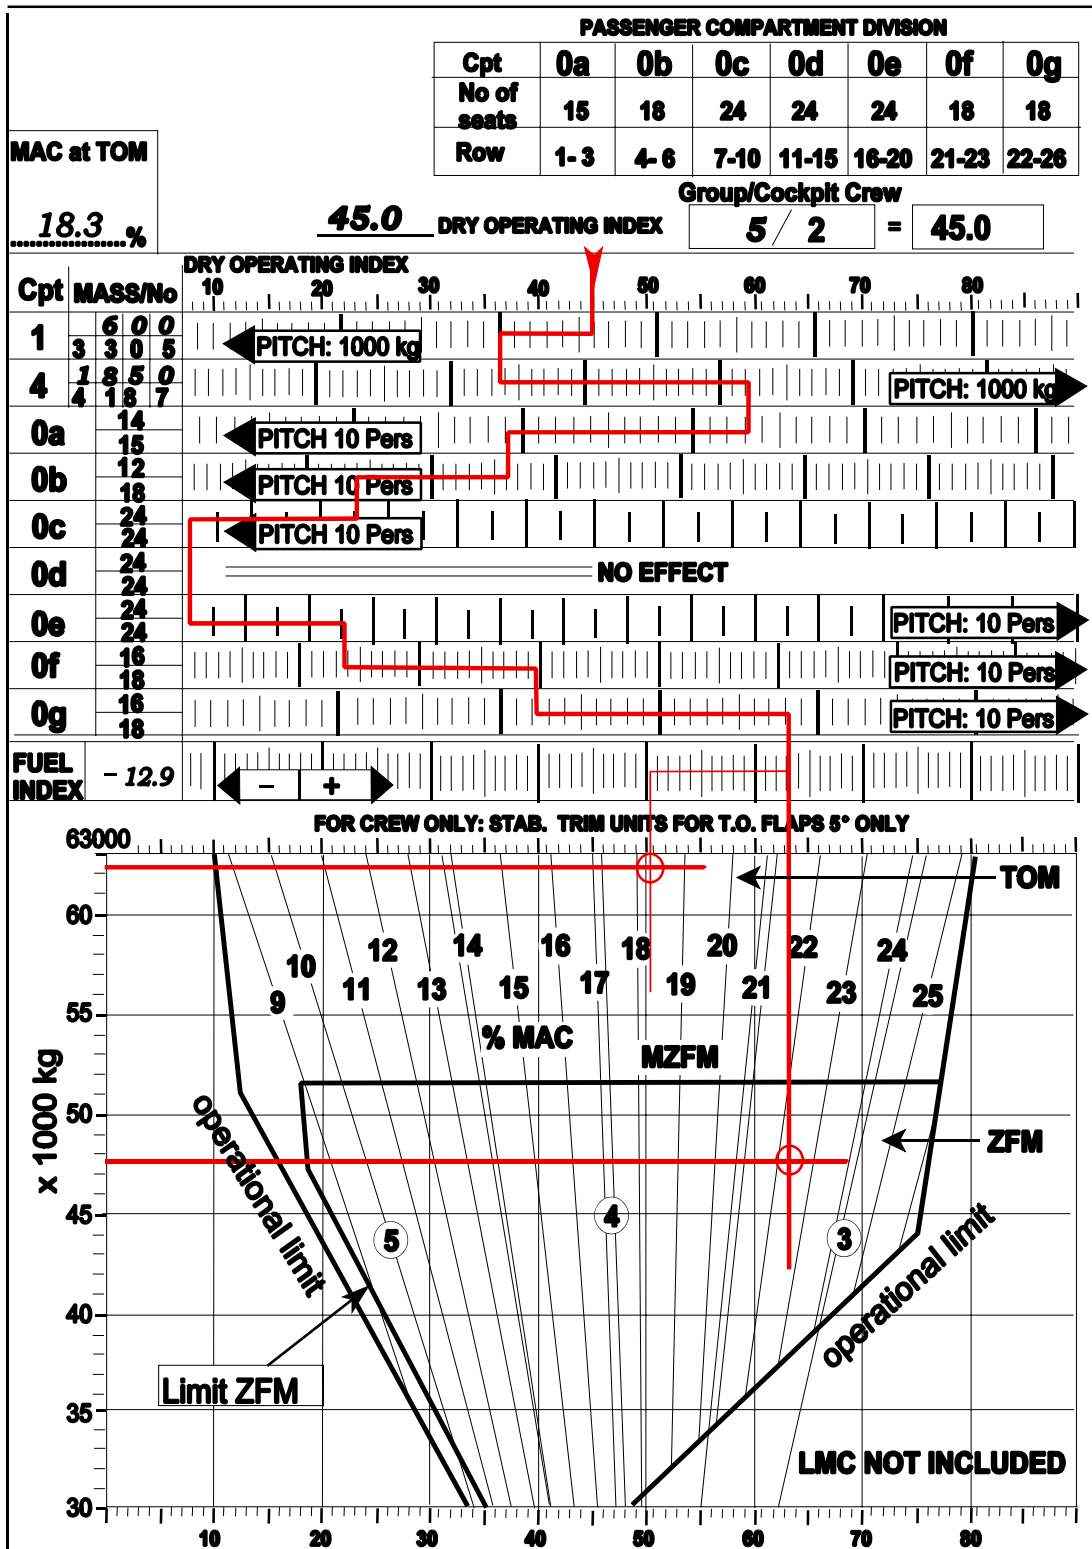


Figure 2.22

Example.

With regard to Part 'A' above (Calculating the traffic/under load), a typical question is given below. For practice work out the answer by using both the load sheet method described on page 69 and the calculation method described on page 65.

A scheduled flight of three hours estimated time, within Europe, is to be conducted. Using the data given calculate the maximum mass of freight that may be loaded in the following circumstances:

Performance limited take-off mass	67,900 kg
Performance limited landing mass	56,200 kg
MZFM	51,300 kg
DOM	34,960 kg
Fuel on board at ramp	15,800 kg
Taxi fuel	450 kg
Trip fuel	10,200 kg
Passengers (adults/each 84 kg)	115
(children/each 35 kg)	6
Flight crew (each 85 kg)	2
Cabin crew (each 75 kg)	5

Allow standard baggage for each passenger (13 kg)

- a. 1,047 kg
- b. 6,147 kg
- c. 4,764 kg
- d. 4,647 kg

QUESTIONS FOR S.E.P.1; M.E.P.1 AND MRJT

SELF ASSESSMENT QUESTIONS FOR SINGLE ENGINE PISTON/PROPELLER (SEP 1)

Unless told otherwise, assume that the maximum fuel capacity is 74 gallons.

For all questions refer to CAP 696 (Loading Manual) in Book 15.

1. Where is the reference datum?
 - a. 74 inches aft of the fwd CG position
 - b. 80.4 inches aft of the rear CG position
 - c. 87.7 inches aft of the rear CG position
 - d. 39 inches forward of the firewall

 2. What are the CG limits?
 - a. fwd limit = 74 inches to 80.4 inches
 - b. fwd limit = 74 inches, aft limit = 80.4 inches
 - c. fwd limit = 74 inches, aft limit = 87.7 inches
 - d. fwd limit = 74 inches to 80.4 inches and aft limit = 87.7 inches

 3. What is the CG at the BEM?
 - a. 77 inches
 - b. 87 inches
 - c. 77.7 metres
 - d. 77.7 inches

 4. What is the structural load limit for the floor at baggage zone 'C'?
 - a. 50 lb per square foot
 - b. 100 lb per cubic foot
 - c. 100 lb per square foot
 - d. 100 kg per square inch

 5. What is the distance of the main undercarriage from the firewall?
 - a. 97 inches
 - b. 58 inches
 - c. 87.7 inches
 - d. 39 inches

 6. The aircraft has six seats. Assuming no other cargo or baggage, what is the maximum fuel that can be carried if all six seats are occupied and the mass of each occupant is 180 lb?
 - a. 50 lbs but the CG would be dangerously out of limits
 - b. 155 lbs but the CG would be dangerously out of limits
 - c. 50 lbs and the CG would be in limits
 - d. 155lbs and the CG would be in limits

 7. Where is the centroid of baggage zone B?
 - a. 108 inches from the datum
 - b. 120 inches from the datum
 - c. 150 inches from the datum
 - d. 180 inches from the datum
-

8. Assuming the weight and access is not a problem where can a box of mass 500 lb be positioned if the dimensions are 0.75 ft x 1.5 ft x 5 ft?
- in any of the baggage zones if placed on its smallest area
 - in zones 'B' or 'C' if placed on its largest area
 - in zone 'C' only if placed on its middle area
 - in zone 'A' only if placed on its largest area
9. Assuming the weight and access is not a problem, where can a cubic box of mass 500 lb be positioned if the dimensions are 3.15 ft?
- in any of the baggage zones
 - in zone 'B' or 'C' only
 - in zone 'A' only
 - in zone 'C' only
10. If the landing mass is 3155 lb and the trip fuel was 40 gallons, what was the ZFM if the fuel tanks held 60 gallons of fuel prior to take-off?
- 3001 lb
 - 3035 lb
 - 3098 lb
 - 3111 lb
11. What is the maximum ramp mass?
- 3650 lbs
 - 3663 lbs
 - 3780 lbs
 - 3870 lbs
12. How far is the main wheel from the aft CG limit?
- 0.7 inches behind the rear datum
 - 0.7 inches forward of the rear datum
 - 6.6 inches forward of the rear datum
 - 9.3 inches aft of the rear datum
13. How far is the firewall from the fuel tank centroid?
- 36 inches
 - 37 inches
 - 38 inches
 - 39 inches
14. If the total moment is less than the minimum moment allowed:
- useful load items must be shifted aft
 - useful load items must be shifted forward
 - forward load items must be increased
 - aft load items must be reduced

15. The CG is on the lower of the fwd CG limits:
- a. at a mass of 2500 lb and moment of 185000 lb in
 - b. at a moment of 175,000 lb in and a mass of 2350 lb
 - c. at a moment of 192,000 lb in and a mass of 2600 lb
 - d. all the above

SELF ASSESSMENT QUESTIONS FOR MEP 1

1. What performance class does the aircraft belong to?
 - a. Performance class 'A'
 - b. Performance class 'B'
 - c. Performance class 'C'
 - d. Performance class 'D'

 2. Where is the reference datum?
 - a. 78.4 inches forward of the wing leading edge at the inboard edge of the inboard fuel tank
 - b. 25.3 inches forward of the nose wheel
 - c. 109.8 inches forward of the main wheel
 - d. all the above

 3. The main wheel is :
 - a. 19 inches forward of the fwd CG limit at the maximum take-off mass
 - b. 27.8 inches behind the fwd CG limit at a take-off mass of 3400 lbs
 - c. 15.2 inches forward of the rear CG limit at the maximum take-off mass
 - d. all the above

 4. The nose wheel is :
 - a. 56.7 inches forward of the fwd CG limit at maximum take-off mass
 - b. 65.5 inches forward of the fwd CG limit at maximum take-off mass
 - c. 69.3 inches aft of the rear CG limit at maximum take-off mass
 - d. all the above

 5. What is the minimum fuel mass that must be consumed if the aircraft, having become airborne at maximum weight, decides to abort the flight.
 - a. 1260 lb
 - b. 280 lb
 - c. 237 lb
 - d. 202 lb

 6. If the pilot has a mass of 200 lb, what is the maximum traffic load?
 - a. 1060 lb
 - b. 1600 lb
 - c. 1006 lb
 - d. 6001 lb

 7. Assuming the maximum zero fuel mass and maximum take-off mass, what fuel load can be carried?
 - a. 38.9 Imperial gallons
 - b. 46.6 US gallons
 - c. 176.8 litres
 - d. any one of the above
-

8. A box of mass 100 lb is to be transported. The box dimensions are 9 x 9 x 12 inches. Which zones can it be carried in?
- all zones, both the mass and structural loading are within limits
 - zones 2 and 3 only
 - no zones, both the mass and structural loading would be exceeded.
 - no zones, the structural loading would be exceeded.
9. A box of mass 360 lb is to be transported. The dimensions of the box are 1.7ft x 1.7ft x 1.8ft. Which zones can it be carried in?
- zones 2 and 3 only but placed on the 1.7 x 1.7 face
 - zones 2 and 3 only but placed on the 1.7 x 1.8 face
 - no zones, both the mass and structural loading would be exceeded
 - no zones, the structural loading would be exceeded.
10. Assuming floor loading limits are acceptable, how much freight and fuel load can be carried for MTOM if the pilot's mass was 200 lb?
- A full load in each zone plus 380 lb of fuel
 - 50 lb in zones 1 or 4 but full loads in each of the other zones, plus 280 lbs of fuel.
 - 350 lbs load in zone 4 but full loads in all the other zones, plus 280 lbs of fuel.
 - A full freight load in each zone plus 280 lb of fuel
11. What is the maximum fuel tank capacity?
- not given.
 - 123 US gallons
 - 46.6 US gallons
 - TOM minus ZFM
12. If the aircraft is at MTOM with full fuel tanks and a pilot of mass 200 lb, what traffic load can be carried?
- nil
 - 579 lbs providing at least 20.5 gallons of fuel are consumed in start, taxi and flight
 - 625 lbs providing at least 43.3 gallons of fuel are consumed in start, taxi and flight
 - 759 lbs providing at least 59.5 gallons of fuel are consumed in start, taxi and flight
13. The CG when the TOM is 4300 lb and the corresponding moment is 408500 lb in is :
- 95 inches
 - 59 inches
 - 0.4 inches tail heavy
 - 0.4 inches rear of the aft limit
14. If the CG is 86 inches and the TOM is 4100 lb the aircraft is :
- just on the forward CG limit
 - just outside the forward CG limit
 - just inside the aft CG limit
 - within the two forward limits

SELF ASSESSMENT QUESTIONS FOR MRJT 1

1. What is the total length of the fuselage?
 - a. 1365 inches
 - b. 1375 inches
 - c. 1387 inches
 - d. 1395 inches

 2. How far is the front spar from the datum?
 - a. 562 inches
 - b. 540 inches
 - c. 500 inches
 - d. 458 inches

 3. What is the distance between the two main access doors?
 - a. 940 inches
 - b. 947 inches
 - c. 974 inches
 - d. 984 inches

 4. How far is the leading edge of the mean aerodynamic chord from the datum?
 - a. 540 inches forward of the datum
 - b. 589.5 inches forward of the datum
 - c. 625.6 inches aft of the datum
 - d. 627.5 inches aft of the datum

 5. What is the length of the mean aerodynamic chord?
 - a. 104.5 inches
 - b. 114.5 inches
 - c. 124.5 inches
 - d. 134.5 inches

 6. What moment change occurs when the flaps are fully retracted from the 15 degree position?
 - a. a reduction of 14 kg in
 - b. an increase of 14 kg in
 - c. a reduction of 14000 kg in
 - d. an increase of 14000 kg in

 7. What change in moment occurs when the flaps are retracted from 40 degrees to 5 degrees?
 - a. a negative moment of 5 kg in
 - b. a negative moment of 11 kg in
 - c. a negative moment of 16 kg in
 - d. a negative moment of 5000 kg in
-

8. What stabiliser trim setting is required for take-off when the CG is 19% MAC for 5 degrees of take-off flap?
- 2.75
 - 3.75
 - 4.75
 - 5.75
9. What is the maximum structural take-off mass?
- 63060 kg
 - 62800 kg
 - 54900 kg
 - 51300 kg
10. What is the CG range for maximum zero fuel mass?
- 8% MAC to 27% MAC
 - 12%MAC to 20% MAC
 - 7.5% MAC to 27.5% MAC
 - 8.5% MAC to 26% MAC
11. Assuming the MZFM, what is the maximum allowable fuel mass for take-off?
- 10015 kg
 - 10150 kg
 - 11500 kg
 - 15000 kg
12. Assuming the standard masses have been used for both passengers and baggage, what is the mass of a full passenger and baggage load?
- 13027 kg
 - 13677 kg
 - 14127 kg
 - 15127 kg
13. What is the allowable hold baggage load for an aircraft with a full passenger complement?
- 1533 kg
 - 1633 kg
 - 1733 kg
 - 1833 kg
14. What is the underload if only maximum passenger hold baggage is carried?
- 3305 kg - 1833 kg = 1472 kg
 - 4187 kg - 1833 kg = 2354 kg
 - 7492 kg - 1833 kg = 5659 kg
 - 9247 kg - 1833 kg = 7414 kg

15. If the crew mass is 450 kg and the Zero Fuel Mass is 51300 kg, what is the Basic Empty Mass if a full traffic load is carried?
- 31514 kg
 - 31773 kg
 - 37713 kg
 - 33177 kg
16. Using the values for the data given in the Loading Manual, would the aircraft be able to carry both a full fuel load and a full Traffic load at take-off?
- No
 - Yes, providing the BEM was not more than 31145 kg
 - Yes, providing the BEM was not less than 31451 kg
 - Yes, providing the BEM was not more than 31514 kg
17. If the DOM is given as 34300 kg and the aircraft has a full load of passengers and baggage, what additional cargo mass could it carry i.e. what is the underload?
- none
 - 3123 kg
 - 3223 kg
 - 3323 kg
18. What is the maximum usable fuel quantity?
- 5311 US gallons
 - 5294 US gallons
 - 5123 US gallons
 - 5032 US gallons
19. What is the maximum usable fuel mass?
- 16092 kg
 - 16078 kg
 - 16064 kg
 - 16040 kg
20. What is the allowable start and taxi fuel?
- 160 kg
 - 260 kg
 - 360 kg
 - 460 kg
21. What are the preferred zones for passenger loads if the pax load is low?
- zones E, F and G
 - zones C, D and E
 - zones B, C and D
 - A, B and C

22. How many seats are there in zone B?
- 15
 - 18
 - 21
 - 24
23. The leading edge of the MAC is given as 625.6 inches aft of the datum. What is the distance of the CG from the datum if it is found to be 16% of the MAC?
- 547 inches
 - 647 inches
 - 747 inches
 - 674 inches
24. The CG is found to be 652.5 inches aft of the datum. What percentage is the CG to the MAC?
- 10%
 - 15%
 - 20%
 - 25%
25. If a passenger moves from a seat position corresponding to the balance arm at zone D to a position corresponding to the balance arm at zone F, what distance will the passenger have travelled and how many seat rows will he have passes?
- 255 inches and 8 seat rows
 - 260 inches and 7 seat rows
 - 265 inches and 6 seat rows
 - 270 inches and 5 seat rows
26. The balance arm for each of the seat zones is measured from the datum to:
- the front border line of the zone
 - the centre line of the zone
 - the rear border line of the zone
 - the front border line of the next zone in sequence
27. What is the maximum and minimum running load of a box of mass 500 kg and dimensions of 1m x 1.2m x 1.2m?
- 12.7 kg/in and 10.6 kg/in
 - 10 kg/in and 12.4 kg/in
 - 11 kg/in and 9.5 kg/in
 - 15 kg/in and 13.1 kg/in
28. What is the maximum and minimum distribution load intensity for a box of mass 500 kg and dimensions of 1m x 1.2m x 1.2m?
- 50.5 kg/sq ft and 40.6 kg/sq ft
 - 47.3 kg/sq ft and 37.7 kg/sq ft
 - 45.1 kg/sq ft and 35.8 kg/sq ft
 - 38.7 kg/sq ft and 32.3 kg/sq ft

29. All other parameters being acceptable, a box with a maximum and minimum running load of 12kg/in and 7 kg/in and a mass of 800 kg can be fitted into:
- any compartment of either the forward or aft cargo compartment
 - the front section of the aft cargo compartment or the rear section of the forward cargo compartment
 - the rear section of the forward cargo compartment or the rear section of the aft cargo compartment
 - the centre section of forward cargo compartment only
30. A box with a mass of 500 kg and dimensions 0.8m and 0.9m x 1.3m has a maximum and minimum distribution load intensity of:
- 64.6 kg/sq ft max and 39.7 kg/sq ft min
 - 39.7 kg/sq ft max and 64.6 kg/sq ft min
 - 44.7 kg/sq ft max and 39.7 kg/sq ft min
 - 64.6 kg/sq ft max and 44.7 kg/sq ft min
31. The maximum freight mass allowed is:
- 17017 lb
 - 16517 lb
 - 16017 lb
 - 15517 lb
32. Assuming all other parameters are acceptable, a box with a mass of 500 kg and with equal sides of 8.5 ft would fit into:
- either the front or rear cargo compartment
 - the forward cargo compartment only
 - neither cargo compartment
 - the aft cargo compartment only
33. The front compartment of the front cargo hold is situated below:
- passenger zone A
 - passenger zone B
 - passenger zone C
 - passenger zone D
34. The balance arm of the centroid of the forward hold compartment is:
- 228 inches
 - midway between 228 inches and 286 inches
 - midway between 286 inches and 343 inches
 - 367.9 inches
35. The maximum distribution load intensity for the cargo compartments is:
- 68 lb per sq ft
 - 68 kg per sq metre
 - 68 kg per sq in
 - 68 kg per sq ft

36. Between 44,000 kg and 63,000 kg the rear CG limit as a percentage of the MAC:
- is constant at 28%
 - increases from 28% to 29.5%
 - decreases from 28% to 26%
 - decreases from 28% to 9%

Referring to the Load and Trim Sheet on page 29, answer questions 37 to 49 inclusive:

37. The Traffic Load is:
- 39800 kg obtained from ZFM, 51300 kg less fuel mass 11500 kg
 - obtained from the sum of pax mass plus baggage mass plus total cargo compartment mass
 - 13370 kg obtained from 10920 kg pax mass plus 2450 kg baggage mass plus 630 kg cargo mass
 - 13370 kg obtained from 10920 kg pax mass, 1820 baggage mass and 630 kg cargo mass
38. The cargo distribution in section 4 is:
- 1220 kg
 - 630 kg
 - 1850 kg
 - 1820 kg plus 630 kg
39. The actual take-off mass is:
- 51300 kg ZFM plus 14500 kg take-off fuel
 - 62800 kg less 8500 kg trip fuel
 - 53670 kg less 14500 kg take-off fuel
 - 47670 kg ZFM plus 14500 kg take-off fuel mass
40. The landing mass is:
- 62800 kg take-off mass less 8500 kg trip fuel
 - 62170 kg take-off mass less 8500 kg trip fuel
 - 62170 kg take-off mass plus 8500 kg trip fuel
 - 62800 kg take-off mass plus 8500 kg trip fuel
41. In order to determine the underload the pilot starts by selecting the lowest mass from the three key masses given. The key masses are:
- Dry Operating Mass, Max'm Zero Fuel Mass and Take Off Mass
 - Max'm Zero Fuel Mass, Take Off Mass and Landing Mass
 - Dry Operating Mass, Max'm Zero Fuel Mass and Landing Mass
 - Traffic Load, Take-off Mass and Landing Mass
42. From the Figure s given, if the actual take-off fuel mass (14500 kg) was added to the Maximum Zero Fuel Mass the aircraft would be:
- Below the maximum Take-off mass by 350 kg
 - Over the maximum Take-off mass by 530 kg
 - Over the maximum Take-off mass by 3000 kg
 - Below the maximum Take-off mass by 630 kg

43. The actual underload for the aircraft after the traffic load and fuel load have been accounted for is:
- zero
 - 720 kg
 - 630 kg
 - 960 kg
44. What is the Dry Operating Index?
- 45
 - 12
 - 54
 - 10
45. What are the seat row numbers in pax zone 'Oc'?
- 4 – 6
 - 6 – 8
 - 7 – 10
 - 8 -13
46. What is the Take-off Mass as a percentage of the MAC?
- 18.3%
 - 19.3%
 - 20.3%
 - 21.3%
47. Prior to take-off there is a change in destination and so the pilot decides to take 2000 kg of fuel less. Using the Load and Trim Sheet, calculate the new Take-off mass and CG position.
- Can't be calculated because the landing mass will be too high
 - 60800 kg Take-off mass and CG 17.5% MAC
 - 60170 kg Take-off mass and CG 18.8% MAC
 - 60170 kg Take-off mass and 19.3% MAC
48. When adjusting the CG index for the fuel load, why is the line moved to the left as a minus index?
- Because the fuel will be consumed in flight
 - Because the fuel is given a minus index in the fuel index correction table
 - Because the centroid of the tanks is behind the CG position
 - Because the graph would run out of range
49. For a fuel mass of 11800 kg the index is:
- minus 4.5
 - minus 5.7
 - minus 6.3
 - none of the above

50. A scheduled flight of three hours estimated flight time, within Europe, is being planned. Calculate the maximum mass of freight that may be loaded in the following circumstances:

Structural limited take-off mass	62800 kg
Structural limited landing mass	54900 kg
MZFM	51300 kg
Dry Operating Mass	34960 kg
Fuel on board at ramp	15800 kg
Taxi fuel	450 kg
Trip fuel	10200 kg
Passengers (adults each 84 kg)	115
Passengers (children each 35 kg)	6
Flight crew (each 85 kg)	2
Cabin crew (each 75 kg)	3
Standard baggage for each passenger	13 kg

- a. 4647 kg
- b. 4102 kg
- c. 1047 kg
- d. 5545 kg

ANSWERS**Answers to 'definition' example questions**

- 1 a
- 2 c
- 3 d
- 4 a

Answers to Fuel Mass Conversions

- 1 = 16660 US gallons
- 2 = 41908 lb
- 3 = 0.74
- 4 = Lighter by 2500 kg

Answer to Basic empty mass and CG position

The CG is 57 cm in front of the main wheels.

Answers to Percentage Mean Aerodynamic Chord Problems

- 1 = 115.054 inches
- 2 = 10.67 inches fwd of datum
- 3 = Fwd limit 24.3%, Aft limit 53.6%
- 4 = 1.45 inches out of limits
- 5 = 17.05m

Answers to Moving Mass Problems

- 1 = 55.3816 lb
- 2 = 23.9 inches
- 3 = 7 rows
- 4 = 146.1 kg
- 5 = 952 kg
- 6 = 43.2 lb

Answers to Adding or Removing Mass Problems

- 1 = 500 kg
- 2 = 35.97 lb
- 3 = 1742.911 lb
- 4 = 45.7 lb
- 5 = 79.7 inches
- 6 = 3.68 inches
- 7 = 45.71 lb
- 8 = 4455 Imperial gallons

Answer to intensity and running load example

The boxes of cargo must go into hold B and the baggage into hold C

Answers to Station Numbers

- 1 = Station 130
- 2 = Station 1217
- 3 = 348 inches
- 4 = 787 inches

Answers to SEP1 Self Assessment Questions

1	d	11	b
2	d	12	d
3	d	13	a
4	c	14	a
5	b	15	d
6	b	16	b
7	c		
8	b		
9	b		
10	b		

Answer to example Traffic Load Calculation

Maximum allowable freight mass = 4647 kg

Answers to MEP1. Self Assessment Questions

1	b	6	a	11	b
2	d	7	d	12	c
3	b	8	d	13	d
4	b	9	b	14	a
5	c	10	a		

Answers to MRJT Self Assessment Questions

1	c	21	c	41	b
2	b	22	b	42	c
3	b	23	b	43	c
4	c	24	c	44	a
5	d	25	a	45	c
6	c	26	b	46	a
7	d	27	a	47	d
8	b	28	d	48	b
9	b	29	b	49	c
10	a	30	a	50	c
11	c	31	b		
12	b	32	a		
13	d	33	a		
14	c	34	d		
15	a	35	d		
16	a	36	c		
17	d	37	d		
18	b	38	b		
19	d	39	d		
20	b	40	b		

CHAPTER THREE
REVISION QUESTIONS

Contents

QUESTIONS	95
ANSWERS104
SPECIMEN EXAMINATION PAPER105
ANSWERS TO SPECIMEN EXAMINATION PAPER110
DEBRIEF TO SPECIMEN EXAMINATION PAPER111

QUESTIONS

1. Define the useful load:
 - a. traffic load plus dry operating mass
 - b. traffic load plus usable fuel mass
 - c. dry operating mass plus usable fuel load
 - d. that part of the traffic load which generates revenue

2. Determine the position of the CG as a percentage of the MAC given that the balance arm of the CG is 724 and the MAC balance arms are 517 to 1706.
 - a. 14.2 %
 - b. 15.3 %
 - c. 16.3 %
 - d. 17.4 %

3. The distance from the datum to the CG is:
 - a. the index
 - b. the moment
 - c. the balance arm
 - d. the station

4. Using CAP696, MRJT, fig 4.9. What is the balance arm, the maximum compartment load and the running load for the most aft compartment of the fwd cargo hold?

a.	421.5 cm	3305 kg	13.12 kg per inch
b.	1046.5 inches	711 kg	7.18 kg per kg
c.	421.5 inches	2059 kg	13.12 kg per inch
d.	1046.5 m	711 kg	7.18 kg per in

5. If the maximum structural landing mass is exceeded:
 - a. The aircraft will be unable to get airborne
 - b. The undercarriage could collapse on landing
 - c. No damage will occur providing the aircraft is within the regulated landing mass.
 - d. No damage will occur providing the aircraft is within the performance limited landing mass.

6. Use CAP 696, MRJT as appropriate. Prior to departure a MRJT is loaded with maximum fuel of 20100 ltr at an SG of 0.78. Calculate the maximum allowable traffic load that can be carried given the following data:


PLTOM	6,200 kg
PLLM	54,200 kg
DOM	34,930 kg
Taxi fuel	250 kg
Trip fuel	9,250 kg
Contingency and holding fuel	850 kg
Alternate fuel	700 kg

 - a. 13,092 kg
 - b. 12,442 kg
 - c. 16,370 kg
 - d. 16,842 kg

7. Using CAP 696, fig 4.-12. Assuming the fuel index moves minus 5.7 from the ZFM index, what is the take-off CG as a percentage of the MAC?
- 20.1 %
 - 19.1 %
 - 23.0 %
 - 18.2 %
8. For a conventional light aeroplane with a tricycle undercarriage configuration, the higher the take-off mass:
- Stick forces at rotation will increase
 - Range will decrease but endurance will increase
 - Gliding range will reduce
 - Stalling speed will increase
- all statements are correct
 - Statement 3 only is correct
 - Statements 1 and 4 only are correct
 - Statement 4 only is correct
9. Due to a mistake in the load sheet the aeroplane is 1000 kg heavier than you believe it to be. As a consequence:
- V_1 will be later
 - V_{MU} will be later
 - V_R will be later
 - V_1, V_{MU}, V_R will all occur earlier
10. If the aeroplane was neutrally stable this would suggest that:
- the CG is forward
 - the CG is in mid range
 - the CG is on the rear limit
 - the CG is behind the rear limit
11. The CG position is:
- set by the pilot
 - set by the manufacturer
 - able to exist within a range
 - fixed
12. Which of the following would not affect the CG?
- Cabin crew members performing their normal duties.
 - Fuel usage
 - Stabilator trim setting
 - Mass added or removed at the neutral point

13. Using the data for the MRJT in CAP 696, what is the CG as a percentage of the MAC if the CG is 650 inches from the datum.
- 17.03%
 - 18.14%
 - 19.25%
 - 20.36%
14. The CG datum has to be along the longitudinal axis:
- between the nose and the tail.
 - between the leading and trailing edge of the MAC.
 - but does not have to be between the nose and the tail.
 - at the fire
15. The CG is :
- the point on the aircraft where the datum is located.
 - the point on the aircraft at which gravity appears to act.
 - the point on the aircraft from where the dihedral angle is measured.
 - the point on the aircraft where the lift acts through.
16. The aircraft basic mass and CG position is found on :
- the weighing schedule and the aeroplane must be re-weighed if equipment change causes a change in mass or balance
 - On the loading manifest and is DOM – traffic load.
 - On the loading manifest and is ZFM – useful load
 - On the weighing schedule and is adjusted to take account of any mass changes.
17. When determining the mass of fuel/oil and the value of the SG is not known, the value to use is:
- determined by the operator (and laid down in the aeroplane OPS Manual. A pilot simply has to look it up)
 - set out in JAR OPS Section 1
 - determined by the aviation authority
 - determined by the pilot
18. In mass and balance terms, what is an index?
- A cut down version of a force
 - A moment divided by a constant
 - A moment divided by a mass
 - A mass divided by a moment
19. Standard masses for baggage can be used when:
- 9 seats or more
 - 20 seats or more
 - 30 seats or more
 - less than 30 seats

20. What is the zero fuel mass?
- MTOM minus fuel to destination minus fuel to alternative airfield.
 - Maximum allowable mass of the aircraft with no usable fuel on board.
 - Operating mass minus the fuel load.
 - Actual loaded mass of the aircraft with no usable fuel on board.
21. If an aeroplane comes into lands below its MSLM but above the PLLM for the arrival airfield:
- Airframe structural damage will occur.
 - Tyre temperature limits could be exceeded.
 - It might not have sufficient runway length in which to stop safely.
 - A go-around might not be achievable.
 - Brake fade could occur..
- All the answers are correct
 - 3 and 4 only are correct
 - 2, 3, 4 and 5 only are correct
 - 1, 3, 4 and 5 only are correct
22. A twin engine aeroplane of mass 2500 kg is in balanced level flight. The CG limits are 82 in to 95 in from the nose position of the aeroplane and the CG is approximately mid range. A passenger of mass 85 kg, moves from the front seat 85.5 inches aft of the nose to the rear seat 157.6 inches from the nose. What is the new CG position approximately?
- 2.5 inches
 - 87.5 inches
 - 91 inches
 - 92.5 inches
23. Calculate the Basic Empty mass and CG position for the MEP 1 shown below.

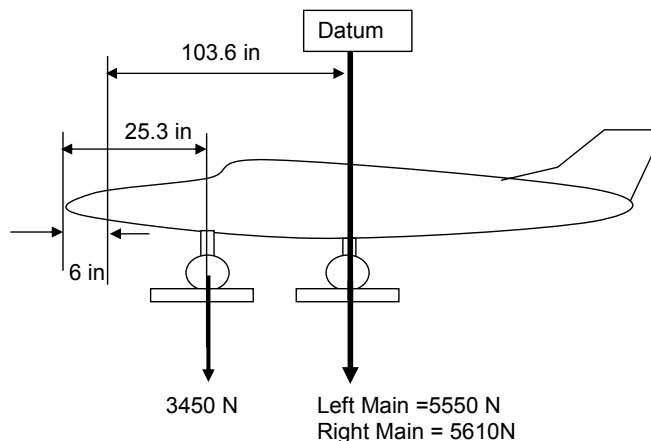

- BEM = 1489 kg and CG is 20 inches forward of datum
- BEM = 1456 kg and CG is 20 inches aft of the nose
- BEM = 1489 kg and CG is 20 inches aft of datum
- BEM = 1456 kg and CG is 89.6 inches aft of the nose

24. A twin engine aeroplane is certified for a MSTOM and a MLM of 58000 kg and 55000 kg respectfully. What is the limiting take-off mass for the aeroplane?

PLTOM	61,000 kg
PLLM	54,000 KG
MZFM 3	6,000 kg
Operating mass	55,000 kg
Trip fuel	30,000 kg
Contingency fuel	5% of trip fuel
Alternative fuel	500 kg
Final reserve	500 kg
Flight duration	3 hours
Fuel consumption	500 kg per hour per engine
Useful load	41500 kg

- a. 58,000 kg
- b. 61,000 kg
- c. 56,145 kg
- d. 56,545 kg

Refer to CAP 696 for answers to 25, 26 and 27

25. With reference to CAP 696 figure 4.9, the centroid of the forward hold is :

- a. half way between stations 228 and station 500
- b. 314.5 inches forward of the aft cargo bay centroid
- c. 367.9 inches from the datum
- d. 367.9 inches from the nose of the aeroplane.

26. The distance of the leading edge of the wing MAC from the datum is:

- a. undefined
- b. 525.6 m
- c. 625.6 in
- d. 525.6 in

27. What is the CG as a percentage of the MAC of the fully loaded aircraft?

BEM	12,000 kg
Arm	3 m
CG	25% MAC
MAC	2 m
Item	Balance arm
Front seats	2.5 m
Rear seats	3 m
Fuel @ 0.74	410 Ltr
Fuel arm	2.5 m
Rear seats	Empty
Pilot	80 kg
Front seat Pax	80 kg

- a. 16%
- b. 19%
- c. 21%
- d. 24%

28. The maximum aircraft mass excluding all usable fuel is:
- fixed and listed in the aircraft's Operations Manual
 - variable and is set by the payload for the trip.
 - fixed by the physical size of the fuselage and cargo holds.
 - variable and depends on the actual fuel load for the trip.
29. Just prior to take-off, a baggage handler put an extra box of significant mass into the hold without recording it in the LMC's. What are the effects of this action? The aeroplane has a normal, tricycle undercarriage.
- V_{MC} will increase if the extra load is forward of the datum.
 - Stick forces in flight will decrease if the extra load is behind the datum.
 - Stick forces at V_R will increase if the box is forward of the main wheels
 - V_{MU} will occur later
 - The safe stopping distance will increase.
- 3, 4 and 5 only
 - 2, 3 and 4 only
 - 1 and 5 only
 - all the above
30. What is the maximum take-off mass given:
- | | |
|---------------------|-----------|
| MSTOM | 43,000 kg |
| MSLM | 35,000 kg |
| PLLM | 33,000 kg |
| MZFM | 31,000 kg |
| DOM | 19,000 kg |
| Total Fuel capacity | 12,500 kg |
| Maximum Trip Fuel | 9,000 kg |
| Contingency fuel | 1000 kg |
| Alternate fuel | 500 kg |
| Final reserve fuel | 400 kg |
- 43,000 kg
 - 42,000 kg
 - 41,000 kg
 - 40,000 kg
31. What is the maximum mass an aeroplane can be loaded to before it moves under its own power?
- Maximum Structural Ramp mass
 - Maximum Structural take-off mass
 - Maximum Regulated Ramp Mass
 - Maximum Regulated Take-off mass
32. The weight of an aircraft in all flight conditions acts:
- parallel to the CG
 - at right angles to the aeroplane's flight path
 - always through the MAC
 - vertically downwards

33. With reference to MRJT Load and trim sheet (CAP696 Pg 31). If the DOM is 35000 kg and the CG is 14%, what is the D.O.I?
- 41.5
 - 33
 - 40
 - 30
34. If the CG moves rearwards during flight:
- range will decrease
 - range will increase
 - stability will increase
 - range will remain the same but stalling speed will decrease
35. The CG of an aeroplane is situated at 115.8 arm and the mass is 4750 kg. A weight of 160 kg is moved from a hold situated at 80 arm to a hold at 120 arm. What would be the new CG arm?.
- 117.14
 - 118.33
 - 118.50
 - 120.01
36. What is the effect of moving the CG from the front to the rear limit at constant altitude, CAS and temperature?
- Reduced optimum cruise range
 - Reduced cruise range
 - Increased cruise range
 - Increased stall speed.
37. The baggage compartment floor-loading limit is 650 kg/m². What is the maximum mass of baggage that can be placed in the baggage compartment on a pallet of dimensions 0.8m by 0.8m. The pallet has a mass of 6 kg?
- 416 kg
 - 1,015 kg
 - 650 kg
 - 410 kg
38. An aeroplane of 110,000kg has its CG at 22.6m aft of the datum. The CG limits are 18m to 22m aft of the datum. How much mass must be removed from a hold 30m aft of the datum to bring the CG to its mid point?
- 26,800 kg
 - 28,600 kg
 - 86,200 kg
 - 62,800 kg
39. Where does the mass act through when the aircraft is stationary on the ground?
- The centre of gravity
 - The main wheels
 - It doesn't act through anywhere.
 - The aerodynamic centre

40. If an aircraft is weighed prior to entry into service who is responsible for doing the re-weigh to prepare the plane for operations?
- The manufacturer.
 - The operator
 - The pilot
 - The flight engineer.
41. An aeroplane has a tank capacity of 50000 Imperial gallons. It is loaded with fuel to a quantity of 165000 kg (790 kg/m^3). What is the specific gravity of the fuel and approximately how much more fuel could be taken up given that mass limits would not be exceeded?
- 0.73 46,053 gallons
 - 0.81 3,940 gallons
 - 0.72 46,000 gallons
 - 0.79 3,946 gallons
42. Define Balance Arm :
- $\text{BA} = \text{Mass} / \text{Moment}$
 - $\text{BA} = \text{Moment} / \text{Mass}$
 - $\text{BA} = \text{Mass} / \text{Distance}$
 - $\text{BA} = \text{Moment} / \text{Distance}$
43. You have been given 16500 litres of fuel at SG 0.78 but written down is 16500 kg. As a result you will experience :
- heavier stick forces at rotation and improved climb performance.
 - heavier stick forces on rotation and distance to take-off increases.
 - lighter stick forces on rotation and calculated V1 will be too high.
 - lighter stick forces on rotation and V2 will be too low.

ANSWERS

1	A	11	C	21	C	31	A	41	D
2	D	12	C	22	C	32	D	42	C
3	C	13	B	23	A	33	C	43	C
4	C	14	C	24	A	34	B		
5	B	15	B	25	C	35	A		
6	B	16	A	26	C	36	C		
7	A	17	A	27	D	37	D		
8	C	18	B	28	A	38	B		
9	B	19	B	29	A	39	A		
10	D	20	D	30	B	40	B		

SPECIMEN EXAMINATION PAPER

1. Define the useful load:
 - a. traffic load plus dry operating mass
 - b. traffic load plus usable fuel mass
 - c. dry operating mass plus usable fuel load
 - d. that part of the traffic load which generates revenue

2. Determine the position of the CG as a percentage of the MAC given that the balance arm of the CG is 724 and the MAC balance arms are 517 to 1706.
 - a. 14.2 %
 - b. 15.3 %
 - c. 16.3 %
 - d. 17.4 %

3. The distance from the datum to the CG is:
 - a. the index
 - b. the moment
 - c. the balance arm
 - d. the station

4. Using CAP696, MRJT, fig 4.9. What is the balance arm, the maximum compartment load and the running load for the most aft compartment of the fwd cargo hold?

a.	421.5 cm	3,305 kg	13.12 kg per inch
b.	1046.5 inches	711 kg	7.18 kg per kg
c.	421.5 inches	2,059 kg	13.12 kg per inch
d.	1046.5 m	711 kg	7.18 kg per in

5. Individual aircraft should be weighed in an air conditioned hangar :
 - a. on entry into service and subsequently every 4 years
 - b. when the effects of modifications or repairs are not known
 - c. with the hangar doors closed and the air conditioning off.
 - d. all the above.

6. If a compartment takes a maximum load of 500 kg, with a running load limit of 350 kg/m and a distribution load limit of 300 kg/m² max. Which of the following boxes, each of 500 kg, can be carried?

1.	100 cm x 110 cm x 145 cm
2.	125 cm x 135 cm x 142 cm
3.	120 cm x 140 cm x 143 cm
4.	125 cm x 135 cm x 144 cm

 - a. any one of the boxes if loaded with due care as to its positioning
 - b. either of boxes 2, 3 and 4 in any configuration
 - c. box 2 with its longest length perpendicular to the floor cross beam or box 3 in any configuration
 - d. either of boxes 3 and 4 with their longest length parallel to the aircraft longitudinal axis.

7. Use CAP 696, Section 4, MRJT 1, as appropriate. Prior to departure a MRJT is loaded with maximum fuel of 20100 ltr at an SG of 0.78. Calculate the maximum allowable traffic load that can be carried given the following data:

PLTOM	67,200 kg
PLLM	54,200 kg
DOM	34,930 kg
Taxi fuel	250 kg
Trip fuel	9,250 kg
Contingency and holding fuel	850 kg
Alternate fuel	700 kg

- a. 13,092 kg
 b. 1,2442 kg
 c. 16,370 kg
 d. 16,842 kg
8. If the maximum structural landing mass is exceeded:
- a. The aircraft will be unable to get airborne
 b. The undercarriage could collapse on landing
 c. No damage will occur providing the aircraft is within the regulated landing mass.
 d. No damage will occur providing the aircraft is within the performance limited landing mass.
9. For a conventional light aeroplane with a tricycle undercarriage configuration, the higher the take-off mass (assume a stab trim system is not fitted):
1. Stick forces at rotation will increase
 2. Range will decrease but endurance will increase
 3. Gliding range will reduce
 4. Stalling speed will increase
- a. all statements are correct
 b. Statement 3 only is correct
 c. Statements 1 and 4 only are correct
 d. Statement 4 only is correct
10. Due to a mistake in the load sheet the aeroplane is 1000 kg heavier than you believe it to be. As a consequence:
- a. V1 will be later
 b. VMU will be later
 c. VR will be later
 d. V1, VMU, VR will all occur earlier
11. If the aeroplane was neutrally stable this would suggest that:
- a. the CG is forward
 b. the CG is in mid range
 c. the CG is on the rear limit
 d. the CG is behind the rear limit

12. The CG position is:
- set by the pilot
 - set by the manufacturer
 - able to exist within a range
 - fixed
13. Which of the following would not affect the CG position?
- Cabin crew members performing their normal duties.
 - Fuel consumption during flight.
 - Horizontal stabilator trim setting
 - Mass added or removed at the neutral point
14. An aircraft is about to depart on an oceanic sector from a high elevation airfield with an exceptionally long runway in the tropics at 1400 local time. The regulated take-off mass is likely to be limited by :
- MZFM
 - Obstacle clearance
 - Maximum certified Take-off mass
 - Climb gradient
15. An aircraft is flying at 1.3 VS1g in order to provide an adequate margin above the low speed buffet and transonic speeds. If the 1.3VS1g speed is 180 kts CAS and the mass increases from 285000 kg to 320000 kg, What is the new 1g stalling speed?
- 146.7 kts, drag will increase and nautical mile per kg fuel burn will decrease.
 - 191 kts, drag will increase and range nm/kg will increase.
 - 191 kts, drag will increase and nm/kg fuel burn will decrease.
 - 147 kts, drag will remain the same and nm/kg fuel burn will increase
16. The datum for the balance arms has to be along the longitudinal axis:
- between the nose and the tail.
 - between the leading and trailing edge of the MAC.
 - but does not have to be between the nose and the tail.
 - at the fire wall.
17. The useful load is:
- TOM – fuel mass
 - BEM plus fuel load
 - TOM minus the DOM
 - TOM minus the operating mass
18. In Mass & Balance terms, what is an index?
- A cut down version of a force
 - A moment divided by a constant
 - A moment divided by a mass
 - A mass divided by a moment


19. Standard masses for baggage can be used for aircraft with:
- 9 seats or more
 - 20 seats or more
 - 30 seats or more
 - less than 30 seats
20. If an aeroplane comes into lands below its MSLM but above the PLLM for the arrival airfield:
- Airframe structural damage will occur.
 - Tyre temperature limits could be exceeded.
 - The runway length might be inadequate.
 - A go-around might not be achievable.
 - Brake fade could occur.
- 1 and 5 only
 - 3 and 4 only
 - 2, 3, 4 and 5 only
 - 1, 3, 4 and 5 only
21. What is the zero fuel mass?
- MTOM minus fuel to destination minus fuel to alternative airfield.
 - Maximum allowable mass of the aircraft with no usable fuel on board.
 - Operating mass minus the fuel load.
 - Actual loaded mass of the aircraft with no usable fuel on board.
22. An aeroplane develops a serious maintenance problem shortly after take-off and has to return to its departure airfield. In order to land safely the aircraft must jettison fuel. How much fuel must be jettisoned.
- Sufficient to reduce the mass to the zero fuel mass
 - The pilot calculates the amount of fuel to jettison to reduce the mass to a safe level at or below the RLM.
 - The fuel system automatically stops the jettison at the RLM.
 - As much as the pilot feels is just insufficient to land safely
23. Calculate the amount of cargo that could be loaded into the aircraft given the following information and using the CAP 696, Section 4, MRJT 1, as necessary.
- | | |
|----------------------------------|-----------|
| Dry Operating Mass | 34,900 kg |
| Performance Limited Landing Mass | 55,000 kg |
| Trip Fuel | 9,700 kg |
| Contingency Fuel | 1,200 kg |
| Alternate Fuel | 1,400 kg |
| 130 passengers at 84kg each | 10,920 kg |
| 130 bags at 14kg each | 1,820 kg |
- 2,860 kg
 - 3,660 kg
 - 4,660 kg
 - 5,423 kg

ANSWERS TO SPECIMEN EXAMINATION PAPER

1	B	11	D	21	D
2	D	12	C	22	B
3	C	13	D	23	A
4	C	14	D		
5	D	15	A		
6	D	16	C		
7	B	17	C		
8	B	18	B		
9	C	19	B		
10	B	20	C		

DEBRIEF TO SPECIMEN EXAMINATION PAPER

1. b. (See CAP 696 Section 1, General Notes, Page 3)
2. d.

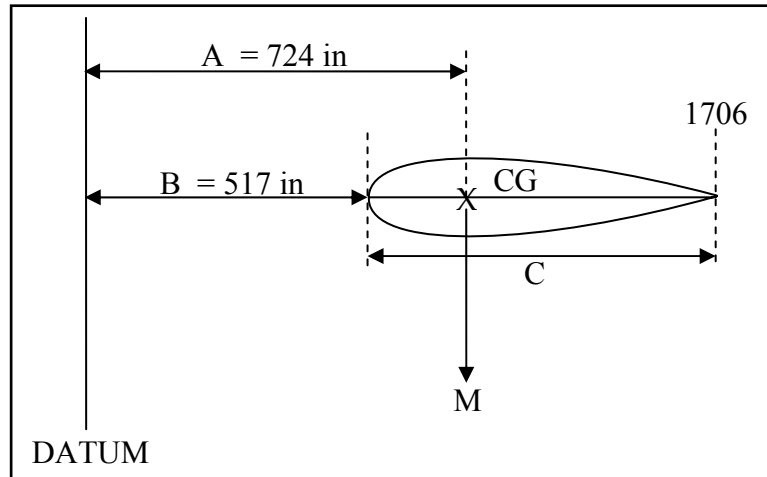

$$C = 1706 - 517 = 1189$$

$$\begin{aligned} \% \text{ MAC} &= \frac{A - B}{C} \times 100 \\ &= \frac{724 - 517}{1189} \times 100 = 17.4 \% \end{aligned}$$

3. c. (See CAP 696 Section 1, General Notes, Page 3)
4. c. See CAP 696 Section 4 - MRJT 1 Page 5. Note the values have been placed in reverse order
5. d. See JAR Ops, sub part J 1.605.
6. d. Max Running load = $\frac{\text{Load}}{\text{Min Length}}$

Therefore Min length = 500 kg / 350kg/m = 1.428 m
 Thus, anything shorter than 1.428m will exceed the maximum running load.

$$\text{Max Distribution load} = \frac{\text{Load}}{\text{Min Area}}$$

Therefore Min Area = 500kg/300kg/m² = 1.66 m²
 Thus, any area less than 1.66m² will exceed the max floor intensity.

Using the above, only boxes 3 and 4 meet the distribution load requirements but the load must be placed with its longest length parallel to the longitudinal axis to meet the running load requirement.

7. b.
- | | | | | |
|--------------------|---|---------------------------|---|-----------|
| Ramp Fuel mass | = | 20,100 lt x 0.78 | = | 15,678 kg |
| Take-off fuel | = | 15,678 – 250 {start/taxi} | = | 15,428 kg |
| Fuel remaining | = | 15,428 – 9,250 | = | 6,178 kg |
| From CAP 696, MZFM | = | 51,300 kg | | |
1. MZFM – DOM = 51,300 – 34,930 = 16,370 kg
2. MSTOM is lower than PLTOM thus
MSTOM – DOM – TO Fuel = 62,800 – 34,930 – 15,428 = 12,442 kg
3. PLLM is lower than SLLM, thus
PLLM - DOM - Fuel Remaining = 54,200 – 34,930 – 6,178 = 13,092 kg
- Allowable TL = lowest of 1, 2 or 3 above = 12,442 kg
8. b. The Maximum Structural Landing Mass is set by the manufacturer to meet with the Design Limit Loads (DLL) of the structure. If exceeded, the structure will be subject to excessive fatigue and could even be permanently damaged.
9. c.
1. Stick forces at rotation will increase [weight is fwd of wheel rotation]
 2. Range will decrease but endurance will increase [both will decrease]
 3. Gliding range will reduce [gliding range is not affected by weight]
 4. Stalling speed will increase [stalling speed increases with weight]
10. a. Wrong. You will still believe it to be the speed you calculated because you are unaware of the error.
b. Correct. VMU will be later (the extra mass will prolong the point of minimum lift-off).
c. Wrong. You will pull the stick back to rotate at the speed you originally calculated.
d. Wrong. They will all occur later.
11. d. the CG is behind the rear limit (review the Principles of Flight notes on Static Margin. If the CG were positioned on the neutral point and the aeroplane was disturbed in pitch by a gust of wind, it would retain the new attitude because the moments about the CG would all equal one another.)
12. b. Wrong. The manufacturer sets the limits not the position
c. Correct. within the range set by the manufacturer
13. c. alters the moments about the CG but not the CG position
14. d. Oceanic means there are no obstacles to consider. Though we have an unlimited runway the high elevation of the airfield will result in a low air density. Also, the time, being at the hottest part of the day will further reduce the air density. The reduced density will seriously reduce the engine performance limits. Weight would be limited in order to achieve a suitable climb gradient.
15. a.
- $$1.3V_s = 180 \text{ kts, therefore } V_s = \frac{180}{1.3} = 138.46 \text{ kts}$$
- $$\text{New } V_s = \text{Old } V_s \times \sqrt{\frac{\text{New weight}}{\text{Old Weight}}}$$
- $$= 138.46 \times \sqrt{\frac{320,000}{285,000}} = 146.7 \text{ kts}$$
- Assuming the aircraft continues to fly at $1.3V_s$ its new speed will be:
 $146.7 \times 1.3 = 190.7 \text{ kts}$
- Naturally, drag will increase and range (nautical miles per kg of fuel) will decrease).

- 16. c The datum does not have to be between the nose and the tail. (The datum can be anywhere in front of, on or behind the aircraft so long as it is on the longitudinal axis of the aeroplane).
- 17. c TOM = DOM + Traffic Load + Fuel Load. But, Traffic Load + Fuel Load = Useful Load.
Thus
TOM = DOM + Useful Load, Rearrange formula, UL = TOM – DOM
- 18. b. To simplify M&B calculations. See Cap 696 page 4
- 19. b. See JAR OPS Sub-part J 1.620, para f
- 20. c. 2, 3, 4 and 5 only

In this example the performance limitation is not stated and could be anything from a runway length restriction, a sloping runway, an obstruction limitation and/or altitude/temperature limitations. The aeroplane might sustain a burst tyre, brake fade, and/or brake fire as a result of heavy braking. Tyre temperatures might exceed limits and delay the take-off time even if they don't burst. The climb slope for obstacle clearance during a go-around might be reduced. As the landing is below the MSLM, the structure itself should not suffer direct damage providing the aeroplane comes to a stop without hitting anything.

- 21. d. See CAP 696 Section 1, General Notes, Page 3, Para 4.1.
- 22. b. The pilot calculates the amount of fuel to jettison to reduce the mass to a safe level at or below the RLM. (Before jettisoning the fuel the pilot should attempt to declare an emergency if time permits and advise Air Traffic Control of his intentions).
- 23. a. When attempting this sort of question the golden rule is to work out the fuel states first. Once the fuel states are known you can simply use the three formulas to determine the answer.

$$\begin{aligned}
 \text{TOF} &= 9700 + 1200 + 1400 = 12300 \\
 \text{FR} &= 1200 + 1400 = 2600 \\
 \text{DOM} &= 34900 \\
 \text{MZFM} &= 53000 \\
 \text{RTOM} &= 62800 \\
 \text{RLM} &= 54900
 \end{aligned}$$

Formulas

$$\begin{aligned}
 1. \quad \text{MZFM} - \text{DOM} &= 53,000 - 34,900 = 18,100 \\
 2. \quad \text{RTOM} - \text{DOM} - \text{TOF} &= 62,800 - 34,900 - 12,300 = 15,600 \\
 3. \quad \text{RLM} - \text{DOM} - \text{FR} &= 54,900 - 34,900 - 2,600 = 17,480
 \end{aligned}$$

$$\begin{aligned}
 \text{Allowable TL} &= \text{Lowest of 1, 2, 3 Above} = 15,600 \text{ kg} \\
 \text{Actual TL} &= \text{PAX} + \text{Baggage} = (130 \times 84) + (130 \times 14) \\
 \text{Actual TL} &= 12,740 \text{ kg}
 \end{aligned}$$

Diffence Between Allowed TL and Actual TL = Underload.

Cargo That Can Be Taken = Underload

$$\text{Cargo} = 15,600 - 12,740 = 2,860 \text{ kg}$$

ATPL GROUND TRAINING SERIES

Flight Performance & Planning I



Aircraft Performance

Contents

AIRCRAFT PERFORMANCE

1. INTRODUCTION.115

2. GENERAL PRINCIPLES - TAKE-OFF133

3. GENERAL PRINCIPLES - CLIMB AND DESCENT155

4. GENERAL PRINCIPLES - CRUISE.219

5. GENERAL PRINCIPLES - LANDING259

6. SINGLE ENGINE CLASS B AIRCRAFT - TAKE OFF279

7. SINGLE ENGINE CLASS B - CLIMB.293

8. SINGLE ENGINE CLASS B - EN-ROUTE AND DESCENT299

9. SINGLE ENGINE CLASS B - LANDING311

10. MULTI-ENGINE CLASS B - TAKE OFF323

11. MULTI ENGINE CLASS B - EN-ROUTE AND DESCENT.335

12. MULTI-ENGINE CLASS B - LANDING343

13. CLASS A AIRCRAFT - TAKE OFF353

14. CLASS A: ADDITIONAL TAKE OFF PROCEDURES393

15. CLASS A: TAKE OFF CLIMB405

16. CLASS A: EN ROUTE421

17. CLASS A: LANDING.445

18. REVISION QUESTIONS.455

CHAPTER ONE
INTRODUCTION

Contents

DEFINITIONS	117
ABBREVIATIONS	125
JAR PERFORMANCE CLASSIFICATION	131
PERFORMANCE EXPRESSIONS	131

DEFINITIONS

Absolute Ceiling The altitude at which the theoretical rate of climb, with all engines operating at maximum continuous power, is reduced to zero feet per minute

Accelerate Stop Distance Available The distance from the point on the surface of the aerodrome at which the aeroplane can commence its take-off run to the nearest point in the direction of take-off at which the aeroplane cannot roll over the surface of the aerodrome and be brought to rest in an emergency without the risk of accident. It is equal to TORA plus any available stopway.

Aerodrome Any area of land or water designed, equipped, set apart or commonly used for affording facilities for the landing and departure of aircraft and includes any area or space, whether on the ground, on the roof of a building or elsewhere, which is designed, equipped or set apart for affording facilities for the landing and departure of aircraft capable of descending or climbing vertically, but shall not include any area the use of which for affording facilities for the landing and departure of aircraft has been abandoned and has not been resumed.

Aerodrome Elevation The elevation of the highest point of the landing area.

Aerodrome Reference Point The aerodrome reference point is the geographical location of the aerodrome and the centre of its traffic zone where an ATZ is established.

Aerodynamic Ceiling The altitude, in unaccelerated 1g level flight, where the Mach number for the low speed and high speed buffet are coincident.

Aeroplane A power-driven heavier-than-air aircraft, deriving its lift in flight chiefly from aerodynamic reactions on surfaces which remain fixed under given conditions of flight.

Aircraft A machine that can derive support in the atmosphere from the reactions of the air other than the reactions of the air against the earth's surface

Aircraft Classification Number (ACN) This is a value assigned to an aeroplane to show its load force. The aircraft classification number must be compared to the pavement classification number (PCN) of an aerodrome. The aircraft classification number may exceed the pavement classification number by as much as 50% but only if the maneuvering of the aeroplane is very carefully monitored otherwise significant damage may occur to both the aeroplane and the pavement.

Airframe The fuselage, booms, nacelles, cowlings, fairings, aerofoil surfaces (including rotors but excluding propellers and rotating aerofoils of engines), and landing gear of an aircraft and their accessories and controls

Air Minimum Control Speed The minimum speed at which directional control can be demonstrated when airborne with the critical engine inoperative and the remaining engines at take-off thrust. Full opposite rudder and not more than 5 degrees of bank away from the inoperative engine are permitted when establishing this speed. V_{MCA} may not exceed 1.2 Vs.

Alternate airport means an airport at which an aircraft may land if a landing at the intended airport becomes inadvisable.

Altitude The altitude shown on the charts is pressure altitude. This is the height in the International Standard Atmosphere at which the prevailing pressure occurs. It may be obtained by setting the sub-scale of a pressure altimeter to 1013 hPa.

Angle of attack The angle between the chord line of the wing of an aircraft and the relative airflow.

Apron A defined area on a land aerodrome provided for the stationing of aircraft for the embarkation and disembarkation of passengers, the loading and unloading of cargo, and for parking.

Auxiliary Power Unit Any gas turbine-powered unit delivering rotating shaft power, compressor air, or both which is not intended for direct propulsion of an aircraft

Balanced Field A runway for which the Accelerate Stop Distance Available is equal to the Take-off Distance Available is considered to have a balanced field length.

Balked Landing A landing manoeuvre that is unexpectedly discontinued

Brake Horsepower The power delivered at the main output shaft of an aircraft engine

Buffet Speed The speed at which the airflow over the wing separates creating turbulent airflow aft of the separation point which buffets the aeroplane

Calibrated Airspeed The indicated air speed, corrected for position and instrument error. It is equal to True Airspeed (TAS) at Mean Sea Level (MSL) in a Standard Atmosphere

Climb Gradient The ratio, in the same units of measurement, expressed as a percentage, as obtained from the formula:- $\text{Gradient} = \text{Vertical interval} \div \text{the horizontal interval} \times 100$.

Clearway An area beyond the runway, not less than 152 m (500 ft) wide, centrally located about the extended centreline of the runway, and under the control of the airport authorities. The clearway is expressed in terms of a clearway plane, extending from the end of the runway with an upward slope not exceeding 1.25%, above which no object or terrain protrudes. However, threshold lights may protrude above the plane if their height above the end of the runway is 0.66 m (26 inches) or less and if they are located to each side of the runway.

Cloud Ceiling In relation to an aerodrome, cloud ceiling means the vertical distance from the elevation of the aerodrome to the lowest part of any cloud visible from the aerodrome which is sufficient to obscure more than one half of the sky so visible.

Contaminated runway A runway covered by more than 25% of water whose equivalent depth is 3mm.

Continuous One Engine Inoperative Power Rating The minimum test bed acceptance power, as stated in the engine type certificate data sheet, when running at the specified conditions and within the appropriate acceptance limitations

Continuous One Engine Inoperative Thrust Rating The minimum test bed acceptance thrust, as stated in the engine type certificate data sheet, when running at the specified conditions and within the appropriate acceptance limitations

Continuous One Engine Inoperative Power The power identified in the performance data for use after take-off when a power-unit has failed or been shut down, during periods of unrestricted duration

Continuous One Engine Inoperative Thrust The thrust identified in the performance data for use after take-off when a power-unit has failed or been shut down, during periods of unrestricted duration

Critical Engine The engine whose failure would most adversely affect the performance or handling qualities of an aircraft

Damp runway A runway is considered damp when the surface is not dry, but when the moisture on it does not give it a shiny appearance.

Declared Distances The distances declared by the aerodrome authority for the purpose of application of the requirement of the Air Navigation

Decision Speed The maximum speed in the take-off at which the pilot must take the first action (e.g. apply brakes, reduce thrust, deploy speed brakes) to stop the aeroplane within the accelerate-stop distance. It also means the minimum speed in the take-off, following a failure of the critical engine at V_{EF} , at which the pilot can continue the take-off and achieve the required height above the take-off surface within the takeoff distance

Density Altitude The altitude in I.S.A., where the prevailing measured density occurs.

Drag That force on an aeroplane which directly opposes thrust

Dry runway A dry runway is one which is neither wet nor contaminated, and includes those paved runways which have been specially prepared with grooves or porous pavement and maintained to retain 'effectively dry' braking action even when moisture is present.

Elevation The vertical distance of an object above mean sea level. This may be given in metres or feet.

En-route The en-route phase extends from 1500 ft above the take-off surface level to 1000 ft above the landing aerodrome surface level for class B aeroplanes or to 1500 ft above the landing aerodrome surface level for class A aeroplanes.

Equivalent Airspeed The calibrated airspeed corrected for compressibility at the particular pressure altitude under consideration. It is equal to Calibrated Airspeed in a Standard Atmosphere

Exhaust Gas Temperature The average temperature of the exhaust gas stream

Final en-route climb speed The speed of the aeroplane in segment four of the take-off flight path with one engine inoperative

Final Segment Speed The speed of the aeroplane in segment four of the take-off flight path with one engine inoperative

Final take-off speed The speed of the aeroplane that exists at the end of the take-off path in the en-route configuration with one engine inoperative

Fixed Pitch Propeller A propeller, the pitch of which cannot be changed, except by processes constituting a workshop operation

Flap extended speed The highest speed permissible with wing-flaps in a prescribed extended position

Flight Level A surface of constant atmospheric pressure that is related to 1013.25 hPa. It is conventionally the pressure altitude to the nearest 1000 ft in units of 100 ft. For example, flight level 250 represents a pressure altitude of 25,000 feet.

Frangibility The ability of an object to retain its structural integrity and stiffness up to a specified maximum load but when subject to a load greater than specified or struck by an aircraft will break, distort or yield in such a manner as to present minimum hazard to an aircraft.

Go-around A procedure involving a decision to abort the landing and climb straight ahead to rejoin the circuit. Such a decision might be taken at any time during the final approach, the transition phase or even after initial touchdown.

Gross Height The true height attained at any point in the take-off flight path using gross climb performance. Gross height is used for calculating pressure altitudes for purposes of obstacle clearance and the height at which wing flap retraction is initiated.

Gross Performance The average performance that a fleet of aeroplanes should achieve if satisfactorily maintained and flown in accordance with the techniques described in the manual.

Ground Minimum Control Speed The minimum speed at which the airplane can be demonstrated to be controlled on the ground using only the primary flight controls when the most critical engine is suddenly made inoperative and the remaining engines at take-off thrust. Throttling an opposite engine is not allowed in this demonstration. Forward pressure from the elevators is allowed to hold the nose wheel on the runway, however, nose wheel steering is not allowed.

Height The vertical distance between the lowest part of the aeroplane and the relevant datum.

Hydroplaning Speed The speed at which the wheel is held off the runway by a depth of water and directional control through the wheel is impossible.

ICAO Standard Atmosphere The atmosphere defined in ICAO Document 7488/2. For the purposes of Certification Specifications the following is acceptable:-

- The air is a perfect dry gas
- The temperature at sea-level is 15°C
- The pressure at sea-level is 1013.2 hPa (29.92 in Hg)
- The temperature gradient from sea-level to the altitude at which the temperature becomes -56.5°C is 0.65°C/100 m (1.98°C/1 000 ft)
- The density at sea level under the above conditions is 1.2250 kg/m³

IFR conditions Weather conditions below the minimum for flight under visual flight rules

Indicated Airspeed The speed as shown by the pitot/static airspeed indicator calibrated to reflect Standard Atmosphere adiabatic compressible flow at MSL and uncorrected for airspeed system errors

Instrument A device using an internal mechanism to show visually or aurally the attitude, altitude, or operation of an aircraft or aircraft part. It includes electronic devices for automatically controlling an aircraft in flight

Landing Distance Available The distance from the point on the surface of the aerodrome above which the aeroplane can commence its landing, having regard to the obstructions in its approach path, to the nearest point in the direction of landing at which the surface of the aerodrome is incapable of bearing the weight of the aeroplane under normal operating conditions or at which there is an obstacle capable of affecting the safety of the aeroplane.

Landing gear extended speed The maximum speed at which an aircraft can be safely flown with the landing gear extended

Landing gear operating speed The maximum speed at which the landing gear can be safely extended or retracted

Landing Minimum Control Speed The minimum speed with a wing engine inoperative where it is possible to decrease thrust to idle or increase thrust to maximum take-off without encountering dangerous flight characteristics.

Large aeroplane An aeroplane of more than 5,700 kg maximum certificated take-off weight. The category 'Large Aeroplane' does not include the commuter aeroplane category

Lift That force acting on an aerofoil which is at right angles to the direction of the airflow
Load factor The ratio of a specified load to the total weight of the aircraft. The specified load is expressed in terms of any of the following: aerodynamic forces, inertia forces, or ground or water reactions

Mach number The ratio of true air speed to the Local Speed of Sound (LSS)

Manoeuvre Ceiling The altitude, in unaccelerated 1.3g level flight, where the mach number for the low speed and high speed buffet are coincident.

Maximum Brake Energy Speed The maximum speed on the ground from which an aeroplane can safely stop within the energy capabilities of the brakes.

Maximum Continuous Power The power identified in the performance data for use during periods of unrestricted duration

Maximum Continuous Thrust The thrust identified in the performance data for use during periods of unrestricted duration

Maximum Structural Take-Off Mass The maximum permissible total mass of an aeroplane at the start of the take-off run.

Maximum Structural Landing Mass The maximum permissible total mass of an aeroplane on landing (under normal circumstances).

Minimum Control speed The minimum speed at which the airplane is directionally controllable with the critical engine inoperative and the remaining engines at take-off thrust.

Minimum unstick speed The minimum speed demonstrated for each combination of weight, thrust, and configuration at which a safe takeoff has been demonstrated.

Missed Approach When an aircraft is caused to abort a landing after it has already started its landing approach. The aircraft has to follow a set missed approach procedure to leave the airspace surrounding the terminal.

Net Height The true height attained at any point in the take-off flight path using net climb performance. Net height is used to determine the net flight path that must clear all obstacles by the statutory minimum to comply with the Operating Regulations.

Net Performance Net performance is the gross performance diminished to allow for various contingencies that cannot be accounted for operationally e.g., variations in piloting technique, temporary below average performance, etc. It is improbable that the net performance will not be achieved in operation, provided the aeroplane is flown in accordance with the recommended techniques.

Outside Air Temperature The free air static (ambient) temperature.

Pitch Setting The propeller blade setting determined by the blade angle, measured in a manner and at a radius declared by the manufacturer and specified in the appropriate Engine Manual

Pitch One of the three axis in flight, this specifies the up and down movement of the aircraft about it's lateral axis.

Pitot tube A small tube most often mounted on the outward leading edge of an airplane wing (out of the propeller stream) that measures the dynamic pressure of the air it meets in flight, working in conjunction with a closed, perforated, coaxial tube that measures the static pressure. The difference in pressures is calibrated as airspeed.

Pressure Altitude The altitude of an aircraft above the pressure level of 1013.25 hPa. This is achieved by setting the altimeter sub-scale to 1013 hPa and reading the altitude indicated.

Reference landing speed The speed of the aeroplane, in a specified landing configuration, at the point where it descends through the landing screen height in the determination of the landing distance for manual landings

Roll One of the three axis in flight, this specifies the rolling movement of the aeroplane about it's longitudinal axis.

Rotation Speed The speed at which, during the take-off, rotation is initiated with the intention of becoming airborne.

Runway A defined rectangular area, on a land aerodrome prepared for the landing and take-off run of aircraft along its length.

Runway Strip An area of specified dimensions enclosing a runway intended to reduce the risk of damage to an aircraft running off the runway and to protect aircraft flying over it when taking-off or landing.

Runway Threshold The beginning of that portion of the runway usable for landing.

Screen Height The height of an imaginary screen placed at the end of the Take-Off Distance Required and at the beginning of the Landing Distance Required.

Service Ceiling The altitude at which the theoretical rate of climb becomes less than a specified rate of climb (typically 1000 ft/min or 300 ft/min), with all engines operating at maximum continuous power.

Specific Fuel Consumption Fuel flow per unit thrust. The lower the value, the more efficient the engine.

Stopway An area beyond the take-off runway, no less wide than the runway and centred upon the extended centreline of the runway, able to support the aeroplane during an abortive take-off, without causing structural damage to the aeroplane, and designated by the airport authorities for use in decelerating the aeroplane during an abortive take-off.

Take-off Distance Available. The distance from the point on the surface of the aerodrome at which the aeroplane can commence its take-off run to the nearest obstacle in the direction of take-off projecting above the surface of the aerodrome and capable of affecting the safety of the aeroplane. It is equal to TORA plus any clearway and cannot be more than one and one half times the TORA, whichever is the less.

Take-Off Mass The mass of an aeroplane, including everything and everyone contained within it, at the start of the take-off run.

Take-off Power The output shaft power identified in the performance data for use during take-off, discontinued approach and baulked landing;

- i. for piston engines, it is limited in use to a continuous period of not more than 5 minutes;
- ii. for turbine engines installed in aeroplanes and helicopters, limited in use to a continuous period of not more than 5 minutes; and
- iii. for turbine engines installed in aeroplanes only (when specifically requested), limited in use to a continuous period of not more than 10 minutes in the event of a power-unit having failed or been shut down

Take-off Run Available The distance from the point on the surface of the aerodrome at which the aeroplane can commence its take-off run to the nearest point in the direction of take-off at which the surface of the aerodrome is incapable of bearing the weight of the aeroplane under normal operating conditions.

Take-off safety speed A referenced airspeed obtained after lift-off at which the required one engine-inoperative climb performance can be achieved

Take-off Thrust means the output shaft thrust identified in the performance data for use during take-off, discontinued approach and baulked landing;

- i. for piston engines, it is limited in use to a continuous period of not more than 5 minutes;
- ii. for turbine engines installed in aeroplanes and helicopters, limited in use to a continuous period of not more than 5 minutes; and
- iii. for turbine engines installed in aeroplanes only, limited in use to a continuous period of not more than 10 minutes in the event of a power-unit having failed or been shut down

Taxiway A defined path on a land aerodrome established for the taxiing of aircraft and intended to provide a link between one part of the aerodrome and another

Thrust That force acting on an aeroplane produced by the engine(S) in a forward direction.

True airspeed The airspeed of an aircraft relative to undisturbed air

Turbo jet An aircraft having a jet engine in which the energy of the jet operates a turbine that in turn operates the air compressor.

Turbo prop An aircraft having a jet engine in which the energy of the jet operates a turbine that drives the propeller. Turboprops are often used on regional and business aircraft because of their relative efficiency at speeds slower than, and altitudes lower than, those of a typical jet.

Variable Pitch Propellers A propeller, the pitch setting of which changes or can be changed, when the propeller is rotating or stationary

V_{EF} The calibrated airspeed at which the critical engine is assumed to fail and is used for the purpose of performance calculations. It is never less than V_{MCG} .

V_1 Referred to as the decision speed. It is the speed at which the pilot, in the event of a power unit failure, must decide whether to abandon or continue the take-off. It is the maximum speed in the take-off at which the pilot must take the first action (e.g. apply brakes, reduce thrust, deploy speed brakes) to stop the aeroplane within the accelerate-stop distance. It also means the minimum speed in the take-off, following a failure of the critical engine at V_{EF} , at which the pilot can continue the take-off and achieve the required height above the take-off surface within the takeoff distance. Engine failure prior to V_1 demands that the pilot must abandon the take-off because there is insufficient distance remaining to enable the aircraft accelerate to the screen height. Engine failure after V_1 demands that the pilot must continue the take-off because there is insufficient distance remaining to safely bring the aircraft to a stop

Wet runway A runway is considered wet when the runway surface is covered with water, or equivalent moisture on the runway surface to cause it to appear reflective, but without significant areas of standing water.

Windshear Localised change in wind speed and/or direction over a short distance, resulting in a tearing or shearing effect that can cause a sudden change of airspeed with occasionally disastrous results if encountered when taking-off or landing.

Yaw One of the three axis in flight, this specifies the side-to-side movement of an aircraft about its vertical axis.

Zero flap speed The minimum safe maneuvering speed with zero flap selected

ABBREVIATIONS

AC	Air Conditioning
ACARS	Aircraft Communications Addressing and Reporting System
ACS	Air Conditioning System
ACN	Aircraft Classification Number
AFM	Aeroplane Flight Manual
AGL	Above ground level
AMSL	Above mean sea level
ANO	Air Navigation Order
AOM	Airline Operation Manual
ASD	Accelerate Stop Distance
ASDA	Accelerate Stop Distance Available
ASDR	Accelerate Stop Distance Required
ATC	Air Traffic Control
AUW	All-Up Weight
BRP	Brake Release Point
CAA	Civil Aviation Authority
CAP	Civil Aviation Publication
CAS	Calibrated Airspeed
CI	Cost Index
CL	Lift coefficient
C of A	Certificate of Airworthiness
C of G	Centre of Gravity
C of P	Centre of Pressure
FMC	Flight Management Computer
FMS	Flight Management System
DL	Drag coefficient
DOC	Direct Operating Cost

DOW	Dry operating weight
EAS	Equivalent Air Speed
EASA	European Aviation Safety Agency
ECON	Economic speed (minimum directing operating cost speed)
EGT	Exhaust Gas Temperature
EMD	Emergency Distance
EMDA	Emergency Distance Available
EMDR	Emergency Distance Required
ETOPS	Extended range with twin aeroplane operations
FAA	Federal Aviation Administration
FCOM	Flight Crew Operating Manual
FF	Fuel Flow (hourly consumption)
FL	Flight Level
G/S	Ground Speed
hPa	Hectopascal
IAS	Indicated Air Speed
IAT	Indicated Air Temperature
ICAO	International Civil Aviation Organisation
IFR	Instrument flight rules
ILS	Instrument Landing System
ISA	ICAO Standard Atmosphere
JAA	Joint Aviation Authority
JAR	Joint Aviation Requirements
kg	Kilograms
km	Kilometres
kt	Nautical miles per hour (knots)
LCN	Load Classification Number
LDA	Landing Distance Available

LDR	Landing Distance Required
LRC	Long Range Cruise speed
MAT	Mass-altitude-temperature
MCRT	Critical Mach number
MCT	Maximum Continuous Thrust
MEA	Minimum safe En route Altitude
MEL	Minimum Equipment List
MMO	Maximum Operating Mach number
MMR	Mach of Maximum Range
MSL	Mean Sea Level
MTOW	Maximum Take-Off Weight
MLRC	Mach Number for Long Range
MSL	Mean Sea Level
MZFW	Maximum Zero Fuel Weight
N	All engines operating.
NFP	Net Flight Path
nm	nautical mile
NOTAM	Notice to Airmen
N1	Speed rotation of the fan
N-1	One engine inoperative
N-2	Two engines inoperative
OAT	Outside Air Temperature
OEI	One engine inoperative
PA	Pressure Altitude
PCN	Pavement Classification Number
PFD	Primary Flight Display
PMC	Power Management Control
PNR	Point of No Return

psi	Pounds per square inch
QFE	The altimeter sub-scale setting which causes the altimeter to read zero elevation when on the airfield reference point or runway threshold
QNE	The indicated height on the altimeter at the aerodrome datum point with the altimeter sub-scale set to 1013.2 hPa
QNH	The altimeter sub-scale setting which causes the altimeter to read the elevation of the airfield above mean sea level when placed on the airfield reference point or runway threshold
RESA	Runway End Safety Area
RNP	Required Navigation Performance
RZ	Reference Zero
SAR	Specific Air Range
SFC	Specific Fuel Consumption
SR	Specific Range
TAS	True Airspeed
TAT	Total Air Temperature
TOD	Take-Off Distance/Top of Descent
TODA	Take-Off Distance Available
TODR	Take-Off Distance Required
TOGA	Take-off/Go-around thrust
TOR	Take-Off Run
TORA	Take-Off Run Available
TORR	Take-Off Run Required
TOSS	Take-Off Safety Speed
TOW	Take-Off Weight
V₁	Decision Speed
V₂	Take-Off Safety Speed
V_{2MIN}	Minimum take-off safety speed
V₃	All-engines operating steady initial climb speed
V₄	All-engines operating steady take-off climb speed

V_A	Design Maneuvering Speed
V_{EF}	The assumed speed of engine failure
V_{FE}	The maximum flap extended speed
VFR	Visual flight rules
V_{FTO}	Final take-off speed
V_{GO}	The lowest decision speed from which a continued take-off is possible with TODA with one engine inoperative
V_{MD}	Velocity of Minimum Drag
V_{MP}	Velocity of Minimum Power
V_{LE}	The maximum speed with landing gear extended
V_{LO}	The maximum at which the landing gear may be lowered
V_{LOF}	Lift-off Speed
V_{MBE}	Maximum brake-energy speed
V_{MC}	Minimum control speed with the critical power unit inoperative
V_{MCA}	Air minimum control speed in the air (take-off climb)
V_{MCG}	Ground minimum control speed (at or near the ground)
V_{MCL}	Landing minimum control speed (on the approach to land)
V_{MO}	The maximum operating speed
V_{MU}	The minimum unstick speed
V_{NE}	Never exceed speed
V_P	Hydroplaning/Aquaplaning speed
V_R	Rotation Speed
V_{RA}	The turbulence speed or rough air speed
V_{REF}	The reference landing speed (Replaced VAT speed)
V_S	Stalling speed or minimum steady flight speed at which the aeroplane is controllable
V_{SR}	Reference stalling speed. Assumed to be the same as V_{S1G}
V_{SR0}	Reference stalling speed in the landing configuration
V_{SR1}	Reference stalling speed in the specified configuration

V_{S1G}	Stalling speed at 1g or the one-g stall speed at which the aeroplane can develop a lift force (normal to the flight path) equal to its weight. This is assumed to be the same speed as VSR.
V_{S0}	The stalling speed with the flaps at the landing setting or minimum steady flight speed at which the aeroplane is controllable in the landing configuration
V_{S1}	The stalling speed for the configuration under consideration
V_{STOP}	The highest decision speed that an aeroplane can stop within ASDA
V_{TIRE}	Maximum tire speed
V_X	The speed for the best gradient or angle of climb
V_Y	The speed for the best rate of climb
V_{ZF}	The minimum safe maneuvering speed with zero flap
WAT	Weight-altitude-temperature
ZFW/ZFM	Zero fuel weight/zero fuel mass
γ	Climb or descent angle
μ	Runway friction coefficient
θ	Aircraft attitude
ρ	Air density

JAR PERFORMANCE CLASSIFICATION

PERFORMANCE CLASS A

Multi-engined aeroplanes powered by turbo-propeller engines with a maximum approved passenger seating configuration of more than 9 or a maximum take-off mass exceeding 5700 kg., and all multi-engined turbo-jet powered aeroplanes. Class A aeroplanes must abide by the Certification Specifications laid out in the document from EASA called CS-25.

PERFORMANCE CLASS B

Propeller driven aeroplanes with a maximum approved passenger seating configuration of 9 or less, and a maximum take-off mass of 5700 kg. or less. Class B aeroplanes must abide by the Certification Specifications laid out in the document from EASA called CS-23.

PERFORMANCE CLASS C

Aeroplanes powered by reciprocating engines with a maximum approved passenger seating configuration of more than 9 or a maximum take-off mass exceeding 5700 kg.

UNCLASSIFIED

This class is given to those aeroplanes whose performance characteristic is very unique and special performance consideration is required. For example, the Unclassified class includes supersonic aeroplanes and sea planes.

	Multi-engined Jet	Propeller driven	
		Multi-engined Turbo-prop	Piston
Mass : > 5700 kg or Passenger Seats: > 9	A	A	C
Mass : ≤ 5700 kg and Passengers Seats : ≤9	A	B	B

PERFORMANCE EXPRESSIONS

Any class of aeroplane, operated in the public transport role must adhere to the operational requirements set out in JAR-OPS 1. JAR-OPS 1 prescribes a minimum performance level for each stage of flight for Class A, Class B and Class C aeroplanes. The certification and operational regulations together aim to achieve a high standard of safety that has kept air travel as the safest form of travel. To achieve the required safety standard the aviation authorities have added a safety margin into the aeroplane performance data. The application of these safety margins changes the expression of the performance data.

MEASURED PERFORMANCE

This is the performance achieved by the manufacturer under test conditions for certification. It utilizes new aeroplanes and test pilots and it therefore unrepresentative of the performance that will be achieved by an average fleet of aeroplanes.

GROSS PERFORMANCE

Gross Performance is the average performance that a fleet of aeroplanes should achieve if satisfactorily maintained and flown in accordance with the techniques described in the manual. Therefore, Gross Performance is Measured Performance reduced by a set margin to reflect average operating performance.

NET PERFORMANCE

Net performance is the gross performance diminished to allow for various contingencies that cannot be accounted for operationally e.g., variations in piloting technique, temporary below average performance, etc. It is improbable that the net performance will not be achieved in operation, provided the aeroplane is flown in accordance with the recommended techniques. This level of performance is approximately 5 standard deviations from the average performance or gross performance. Therefore, 99.99994% of the time, the aeroplane will achieve net performance or better. However, there is less than one chance in a million that the aeroplane will not achieve the net performance. This is the safety standard which the aviation authorities aim to achieve.

CHAPTER TWO

GENERAL PRINCIPLES - TAKE-OFF

Contents

TAKE OFF.	135
THE TAKE-OFF RUN AVAILABLE (TORA)	137
FORCES DURING TAKE-OFF	139
SUMMARY OF FORCES	143
EFFECT OF VARIABLE FACTORS ON TAKE OFF DISTANCE	144
QUESTIONS	149
ANSWERS	154

TAKE OFF

The take off part of the flight is the distance from the brake release point (BRP) to the point at which the aircraft reaches a defined height. This defined height is termed the “screen height”. The screen height varies from 35 ft for class A aeroplanes to 50 ft for class B aeroplanes.

For any particular take-off, it must be shown that the distance required for take-off in the prevailing conditions does not exceed the distance available at the take off aerodrome. However, there are various terms used to describe the available distances at an aerodrome.

AVAILABLE DISTANCES

Most large aerodromes have extra distances associated with the main runway which are used in a variety of ways. These extra distances are Clearways and Stopways.

CLEARWAYS

Clearways are an area beyond the runway, not less than 152 m (500 ft) wide, centrally located about the extended centreline of the runway, and under the control of the airport authorities. The clearway is expressed in terms of a clearway plane, extending from the end of the runway with an upward slope not exceeding 1.25%, above which no object or terrain protrudes. However, threshold lights may protrude above the plane if their height above the end of the runway is 0.66 m (26 inches) or less and if they are located to each side of the runway. Clearways are not physical structures; they are simply an area of defined width and length which are free of obstacles.



Figure 2.1 Clearways extend from the end of the runway with an upward slope not exceeding 1.25%, above which no object or terrain protrudes.

STOPWAYS

Stopways are an area beyond the take-off runway, no less wide than the runway and centred upon the extended centreline of the runway, able to support the aeroplane during an abortive take-off, without causing structural damage to the aeroplane, and designated by the airport authorities for use in decelerating the aeroplane during an abortive take-off. Stopways are physical structures and are usually paved. However, stopways are not as strong as the main length of runway and therefore are only used to help bring an aeroplane to a stop in the event of an abandoned take-off. Stopways are identified by large yellow chevrons on either end of the main runway.



Figure 2.2 Stopways are able to support the aeroplane during an abortive take-off and are marked by large yellow chevrons.

Understanding Stopways and Clearways is essential when examining the available distances published at aerodromes. There are four principle published aerodrome distances, although only three will apply to the take-off and these are discussed next.

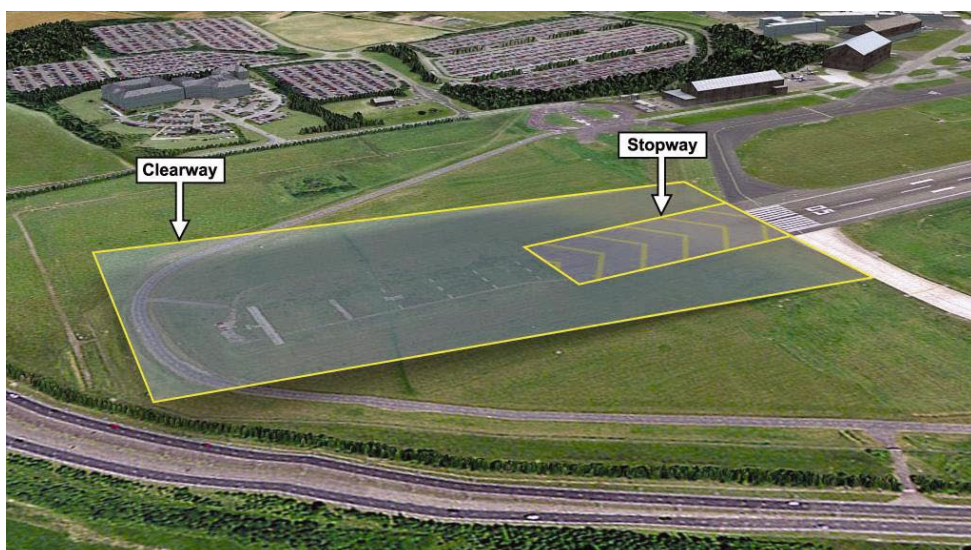


Figure 2.3 Illustrates the Stopways and Clearways that can be found at aerodromes.

THE TAKE-OFF RUN AVAILABLE (TORA)

The take-off run available is the distance from the point on the surface of the aerodrome at which the aeroplane can commence its take-off run to the nearest point in the direction of take-off at which the surface of the aerodrome is incapable of bearing the weight of the aeroplane under normal operating conditions. At most aerodromes the take-off run available is the length of the runway from threshold to threshold.

THE TAKE-OFF DISTANCE AVAILABLE (TODA)

The take-off distance available is the take-off run available plus any clearway (TORA + Clearway). If there is no clearway at the aerodrome then the take-off distance available will be the same length as the take-off run available.

The take-off distance available must be compared to the aeroplanes actual take-off distance. The requirements for take-off state that the aeroplane must be able to complete the take-off within the take-off distance available. Although clearways can be of any length, there is a limit to the amount of clearway that can be used when calculating the TODA. The maximum length of clearway in this case cannot be more than half the length of TORA.

THE ACCELERATE-STOP DISTANCE AVAILABLE OR EMERGENCY DISTANCE AVAILABLE (ASDA/EMDA)

The accelerate-stop distance available is the length of take-off run available plus any stopway (TORA + Stopway). If there is no stopway at the aerodrome then the accelerate-stop distance available will be the same length as the take-off run available.

The accelerate-stop distance available must be compared to the aeroplanes actual accelerate stop distance. The requirements for take-off state that the aeroplanes accelerate-stop distance must not exceed the accelerate-stop distance available.

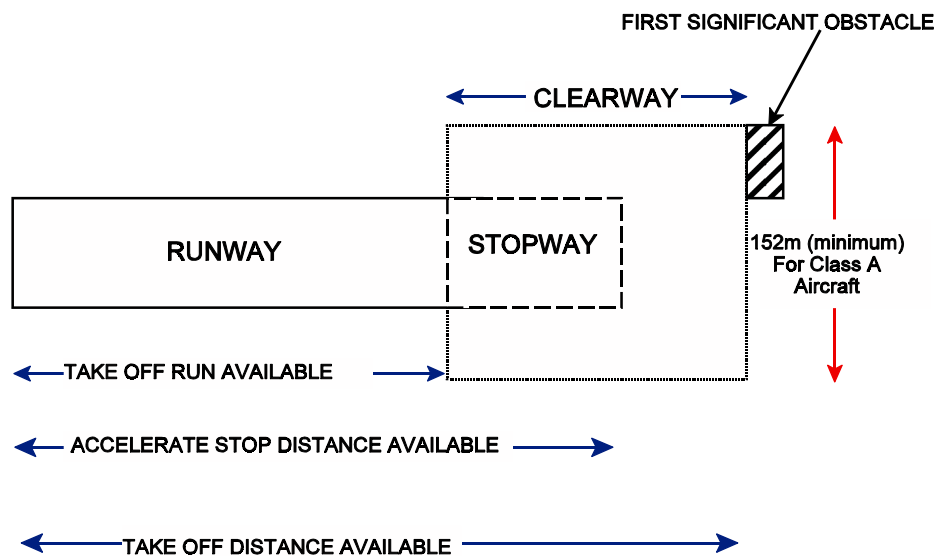


Figure 2.4 A summary of the available distances at an aerodrome.

REQUIRED DISTANCES

The distance required for take-off may be considered as two segments:

- The take off roll or ground run.
- The airborne distance to a "screen" of defined height.

The total distance from the brake release point to the screen height is called the Take-off Distance (TOD). The speed at which the pilot will attempt to raise the nose wheel off the ground is called " V_R ". This is the speed for rotation. At this speed the pilot will pull back on the control column and eventually the nose wheel will lift off the runway. This action will increase the lift and eventually the main wheels themselves will lift off the runway. The speed at which this occurs is called " V_{LOF} " which means the speed for lift off.

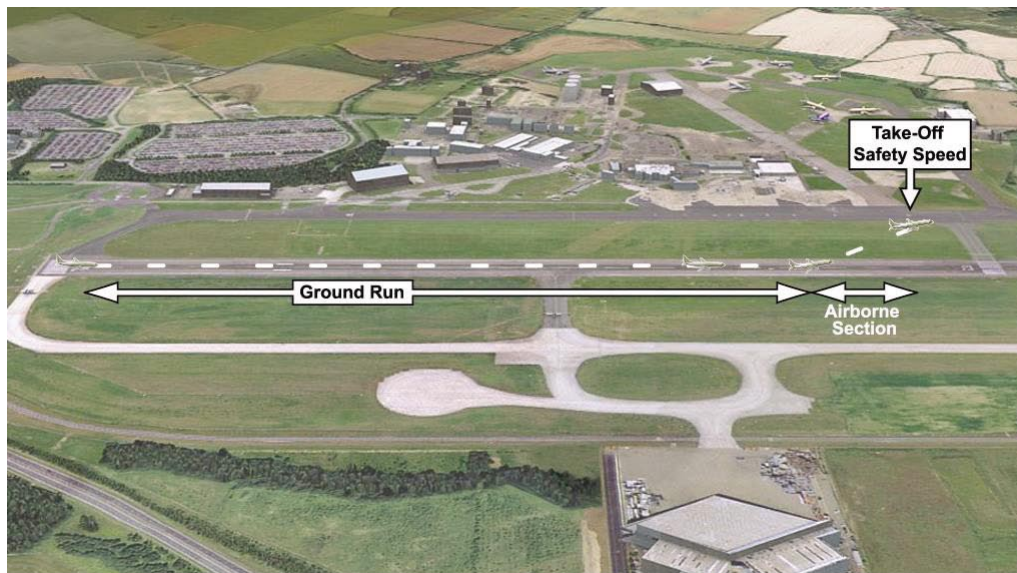


Figure 2.5. The Take-Off Distance (TOD) is the total distance from brake release until the screen height.

Calculating the take-off distance is an important consideration but it is essential to a pilot to understand that there is a chance, albeit a remote chance, that the actual calculated take-off distance will not be achieved. To this end, the aviation authorities have created a set of safety regulations to ensure that poor performance is accounted for in the calculations. These safety regulations require factors to be applied to the estimated distances to give a satisfactory safety margin. The application of safety factors changes the terminology used. The calculated take-off distance is called the Gross Take-off distance, but applying the safety factors changes this to the Net Take-off Distance. The regulations and their associated safety factors will be discussed later in the relevant chapters on the different classes of aeroplanes.

CALCULATING THE TAKE-OFF DISTANCE.

The two formulas shown below are used to help understand the key components in calculating the take-off distance. The upper formula is used to calculate the distance required (s) to reach a specified speed (V) with a given acceleration (ā). Beneath the first formula is the formula to calculate that acceleration.

$$s = \frac{v^2}{2a}$$

$$\bar{a} = \frac{T - D_A - \mu (W - L)}{m}$$

Key:	S = Displacement	ā = Acceleration	W = Weight	D _A = Aerodynamic Drag	m = Mass
	V = Speed	T = Thrust	L = Lift	μ = Coefficient of Friction	

Figure 2.6 A simplified take-off distance and acceleration formula.

For an aircraft taking off, the acceleration is thrust minus drag. However, both of these forces will change as the speed changes, and so the acceleration will not be constant during the take off. Also, during the airborne part of the take-off, the laws of motion will be somewhat different, and the upper formula will change somewhat, but the distance required will still depend on the speed to be achieved and the acceleration.

FORCES DURING TAKE-OFF

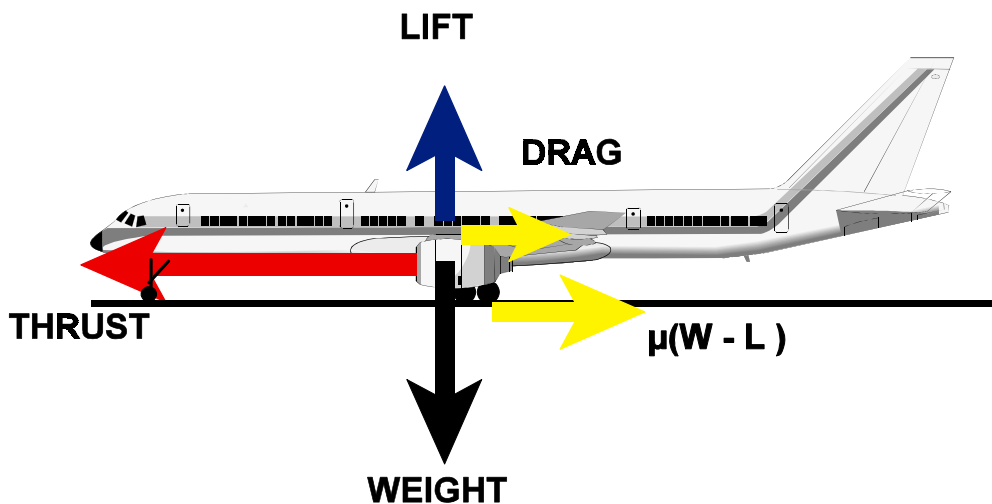


Figure 2.7 Forces in the take-off.

Looking back at the formula for acceleration during take-off it can see that thrust and drag play a very crucial part in the take-off performance. Therefore a little extra detail will be covered on these two important forces.

THRUST

The engine thrust will vary during take off, and the variation of thrust with speed will be different for jet and propeller engines.

- **Jet engine.** For a jet engine the net thrust is the difference between the gross thrust and the intake momentum drag. Increasing speed increases the intake momentum drag, which reduces the thrust. However, at higher speeds the increased intake pressure due to ram helps to reduce this loss of thrust, and eventually at very high speeds it will cause the net thrust to increase again. During take-off the aeroplane speed is still low and as such the ram effect is insufficient to counteract the loss of thrust due to intake momentum drag, therefore during the take-off there will be a decrease of thrust. In later chapters and in some performance graphs you will notice that the assumption is made that jet thrust is constant with speed. This is done so as to simplify some of the teaching points.

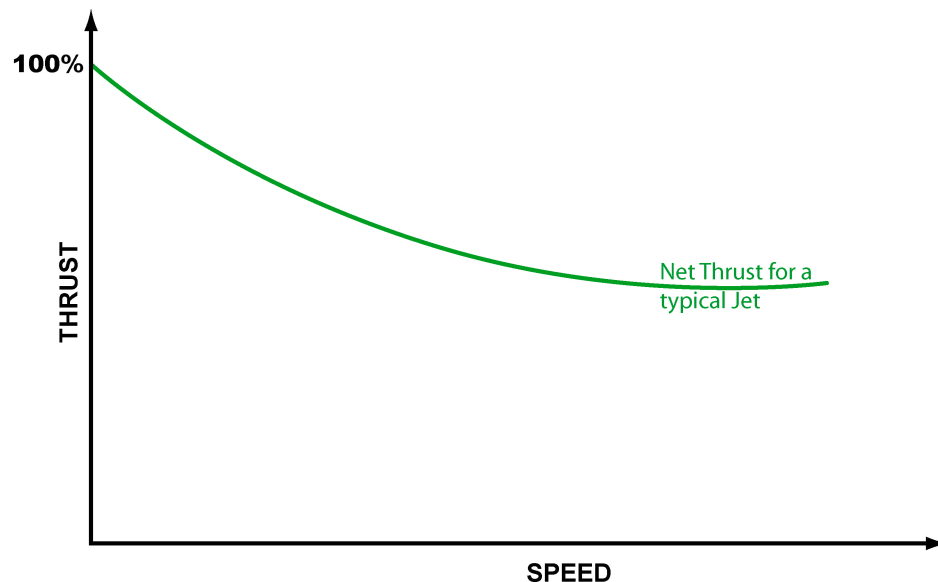


Figure 2.8 Net Thrust with speed for a typical modern jet engine.

- **Flat rated engines.** The thrust produced by an engine at a given rpm. will depend on the air density, and hence on air pressure and temperature. At a given pressure altitude, decreasing temperature will give increasing thrust. However, many jet engines are "flat rated", that is, they are restricted to a maximum thrust even though the engine is capable of producing higher thrust. The reason being that at lower temperatures too much thrust may be generated and the pressures within the compressors may be exceeded. Consequently at temperatures below the flat rating cut off, (typically about ISA + 15°C) engine thrust is not affected by temperature.

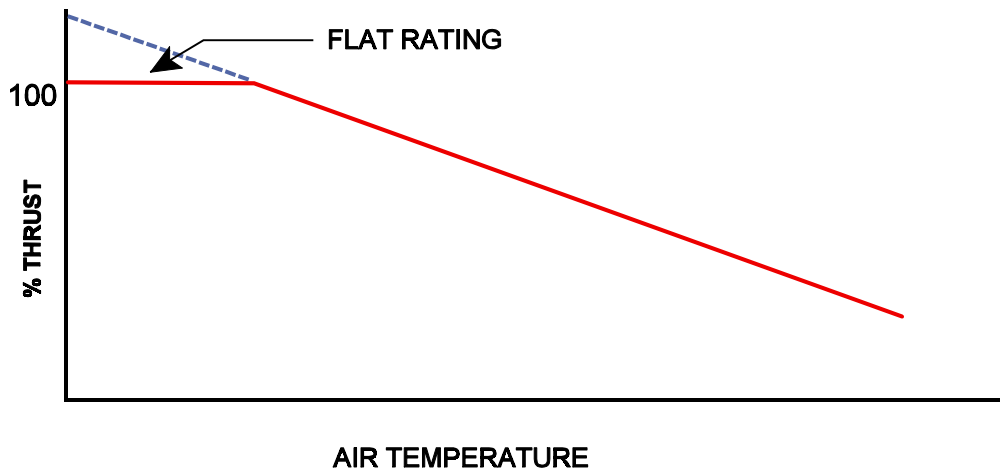


Figure 2.9 Typical thrust with air temperature from a flat rated engine.

- **Propeller.** For a propeller driven aircraft, thrust is produced by a propeller converting the shaft torque into propulsive force. For a fixed pitch propeller, angle of attack decreases as forward speed increases. Thrust therefore decreases with increasing speed. For a variable pitch propeller, the propeller will initially be held in the fine pitch position during take off and the propeller angle of attack will decrease with increasing speed. Above the selected rpm, the propeller governor will come into operation, increasing the propeller pitch, and reducing the rate at which the thrust decreases. In summary therefore, the thrust of a propeller aeroplane decreases with forward speed.

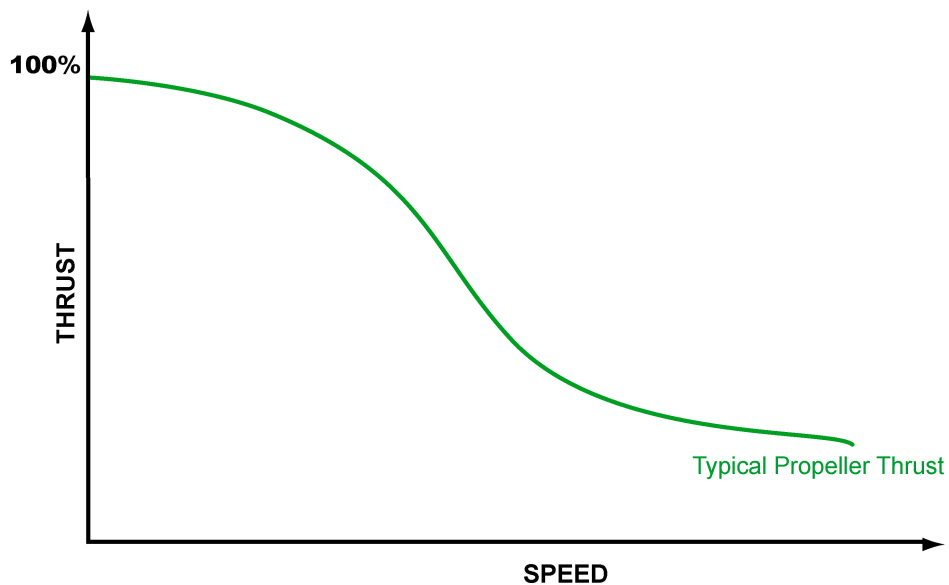


Figure 2.0 Typical thrust with air temperature from a flat rated engine.

Supercharged engines. If the engine is un-supercharged, the power produced will decrease with decreasing density, (higher temperature or lower pressure). For a supercharged engine, power may be maintained with increasing altitude, although increasing temperature will cause a decrease in density and a loss of power.

DRAG

The total drag (D) of an aeroplane during take-off is a product of both aerodynamic drag (DA) and wheel drag/wheel friction (μ) as shown in the formula below.

$$D = D_A + \mu (W - L)$$

- **Aerodynamic Drag.** There are principally two forms of aerodynamic drag, parasite drag and induced drag. Parasite drag increases by the square of the speed, therefore this form of drag will increase during the take-off. Induced drag is a function of the angle of attack. This angle of attack is constant until the aeroplane rotates at which point the angle of attack increases dramatically. Therefore induced drag will increase during the take-off.
- **Wheel Drag.** The wheel drag depends on the load on the wheel (W-L) and the runway surface resistance (μ). At the start of the take-off the load on the wheels is the entire weight of the aeroplane, therefore wheel friction and wheel drag is high. However, as forward speed increases, lift starts to counteract the weight force and this reduces the load on the wheels. Therefore the wheel friction and the wheel drag will reduce, eventually being zero at lift off.

The increase of aerodynamic drag is much higher than the decrease of wheel drag, therefore total drag during the take-off increases.

SUMMARY OF FORCES

In summary then, for all aeroplanes during the take-off, thrust decreases and drag increases. The acceleration force is determined by subtracting the total drag from the total thrust. This is visually represented in the next graph by the area between the total drag line and the thrust line. When thrust is more than drag a more commonly used term "Excess Thrust" is used. Excess Thrust is what is needed to accelerate the aeroplane. You can see from the graph that the Excess Thrust and therefore the acceleration of the aeroplane decreases during the take-off. The term Excess Thrust will be used again when Climb theory is introduced.

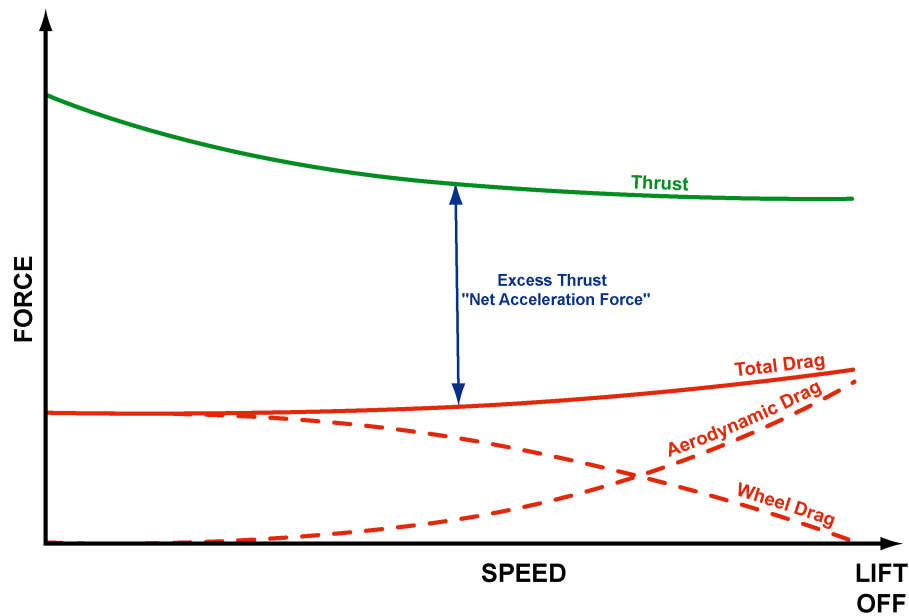


Figure 2.1 Variation of forces with speed during the take-off

TAKE OFF SPEED

The speed (V) in the take-off distance formula is True Ground Speed. When calculating the take-off run required, account must therefore be taken of the effect of density on TAS for a given IAS, and of the effect of wind on TGS for a given TAS.

The speed to be reached at the screen (the Take-off Safety Speed) is determined by the Regulations, and is required to be a safe margin above the stall speed and the minimum control speed, a speed that gives adequate climb performance, and that takes account of the acceleration that will occur after lift off. It is very important to ensure this speed is achieved by the screen height.

EFFECT OF VARIABLE FACTORS ON TAKE OFF DISTANCE

MASS

The mass of the aeroplane affects:

The acceleration for a given accelerating force. This is the effect of inertia. An aeroplane with higher mass will have more inertia. Therefore as mass increases, acceleration will decrease which will increase the take-off distance.

The wheel drag. Increased mass increases the load placed on the wheels and therefore increases the wheel friction. Because of the increased wheel friction, wheel drag will increase. Therefore, acceleration is reduced and the take-off distance will increase.

The take off safety speed. An aeroplane with a higher mass will have a greater force of weight. This must be overcome by greater lift. To gain this extra lift the aeroplane must be accelerated to a higher speed, this will of course increase the take-off distance.

The angle of initial climb to the screen height. This effect will be better understood in the next chapter, but nonetheless a higher mass reduces the angle of the initial climb. This means that the aeroplane will use a greater horizontal distance to get to the screen height.

In summary then, increasing mass has four detrimental effects to the take-off distance.

AIR DENSITY

Density is determined by pressure, temperature and humidity. Density affects:

- The power or thrust of the engine. Reduced density will reduce combustion inside the engine and therefore reduce the thrust and or power that the engine can generate. Therefore acceleration will be less and the take-off distance will increase.
- The TAS for a given IAS. Reduced density will increase the true airspeed for a given indicated airspeed. For example, if the take-off safety speed was an indicated airspeed of 120 knots, then in low density this may represent a true airspeed of 130 knots. Getting to a true speed of 130 knots will require more distance. Therefore, low density will increase the take-off distance.
- The angle of the initial climb. Since there is less thrust and or power in low density, the angle of climb will reduce. Therefore, getting to the screen height will require a longer horizontal distance.

WIND

Winds affect the true ground speed of the aeroplane for any given true airspeed.

Headwinds will reduce the ground speed at the required take-off air speed and reduce the take off distance. For example, with a headwind of 20 knots and a true airspeed for the take-off safety speed being 120 knots, the ground speed is only 100 knots. Getting to a true ground speed of only 100 knots will require less distance. Another benefit is that headwinds also increase the angle of the initial climb which will further reduce the required distance. Therefore, headwinds reduce the take-off distance and it is this reason why pilots always aim to take-off into wind.

A tailwind does the opposite to a headwind. Tailwinds will increase the ground speed and increase the take off distance.

The Regulations for all classes of aircraft require that in calculating the take-off distance, no more than 50% of the headwind component is assumed and no less than 150% of a tailwind component is assumed. This is to allow for variations in the reported winds during take off.

For example, it would not be wise to plan a maximum take-off mass with 10 knots headwind if at the actual time of take-off the wind was less than 10 knots. In this case, the aeroplane would not be able to complete the take-off within the available distance. Most aeroplane performance manuals and operating handbooks already have the wind rules factored into the take-off graphs or tables. In this case, simply used the forecast wind and the graph or table will automatically correct the take-off distance to account for the regulation on wind.

Note: For any headwind the distance required to take-off will be less than the calculated distance, as only half the headwind is allowed for. Equally for any tailwind the distance required will be less, as a stronger tailwind is allowed for. If the wind is a 90° crosswind the distance required to take off will be the same as the distance calculated for zero wind component.

RUNWAY SLOPE

If the runway is sloping a component of the weight will act along the longitudinal axis of the aeroplane. This will either augment thrust or augment drag which will increase or decrease the accelerating force. The amount of weight augmenting either thrust or drag is called either "weight apparent thrust" or "weight apparent drag." It can be calculated by multiplying the force of weight by the sin of the angle of the runway slope.

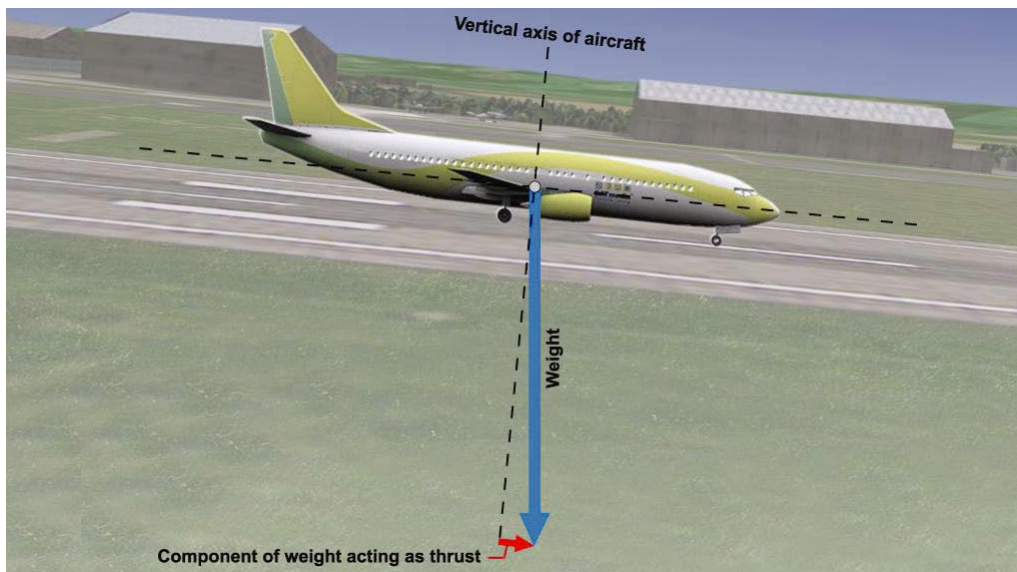


Figure 2.2 On a downslope a proportion of weight acts in the direction of thrust

A downhill slope will increase the accelerating force, and reduce the take off distance, whereas an uphill slope will reduce the accelerating force and increase the take off distance.

RUNWAY SURFACE

Even on a smooth runway there will be rolling resistance due to the bearing friction and tyre distortion. If the runway is contaminated by snow, slush or standing water, there will be additional drag due to fluid resistance and impingement. This drag will increase with speed, until a critical speed is reached, the hydroplaning speed, above which the drag decreases. Despite this, during take-off, the hydroplaning speed is unlikely to be reached, and as such any contamination will increase the drag and hence increase the take-off distance.

If the take-off is abandoned and braking is required, the coefficient of braking friction is severely reduced on a runway which is wet, icy or contaminated by snow or slush. This means that the brake pressure must be severely reduced to prevent skidding. Thus the accelerate stop distance is greatly increased.

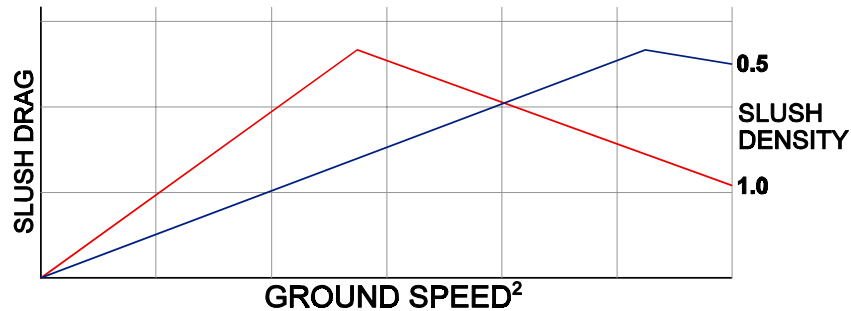


Figure 2.3 The effect of slush density on the slush drag

AIRFRAME CONTAMINATION

The performance data given assumes that the aircraft is not contaminated by frost, ice or snow during take off. In fact it is a requirement that at the commencement of take-off the aeroplane must be free of ice or snow. Snow and Ice on the airframe will increase the drag, reduced the lift and increase the weight of the aeroplane. Therefore, if any of these contaminants are present, the performance of the aircraft will be reduced, and the take-off distance will be increased.

FLAP SETTING

Flaps affect:

- The CL_{max} of the wing
- The drag

Increasing flap angle increases CL_{max} , which reduces stalling speed and take off speed. This reduces the take off distance.

Increasing flap angle increases drag, reducing acceleration, and increasing the take off distance. The net effect is that take off distance will decrease with increase of flap angle but above a certain flap angle the take off distance will increase again. An optimum setting can be determined for each type of aircraft, and any deviation from this setting will give an increase in the take off distance.

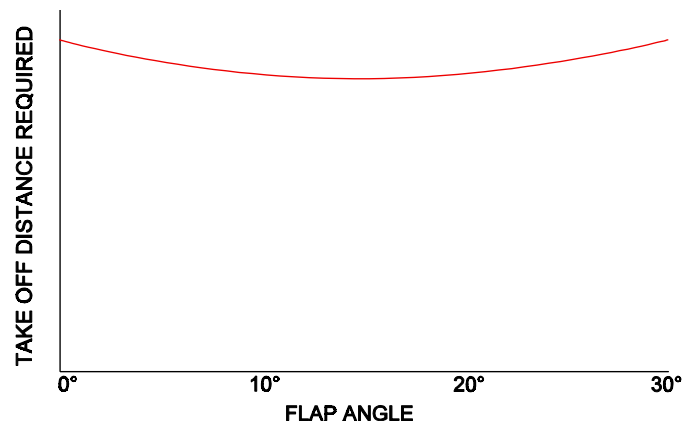


Figure 2.4 A graph showing the effect of the flap angle on the take-off distance required

The flap setting will also affect the climb gradient, and this will affect the Maximum Mass for Altitude and Temperature, which is determined by a climb gradient requirement, and the clearance of obstacles in the take-off flight path.

Increasing the flap angle increases the drag, and so reduces the climb gradient for a given aircraft mass. The maximum permissible mass for the required gradient will therefore be reduced. In hot and high conditions this could make the Mass-Altitude-Temperature requirement more limiting than the field length requirement if the flap setting for the shortest take-off distance is used. A greater take-off mass may be obtained in these conditions by using a lower flap angle.

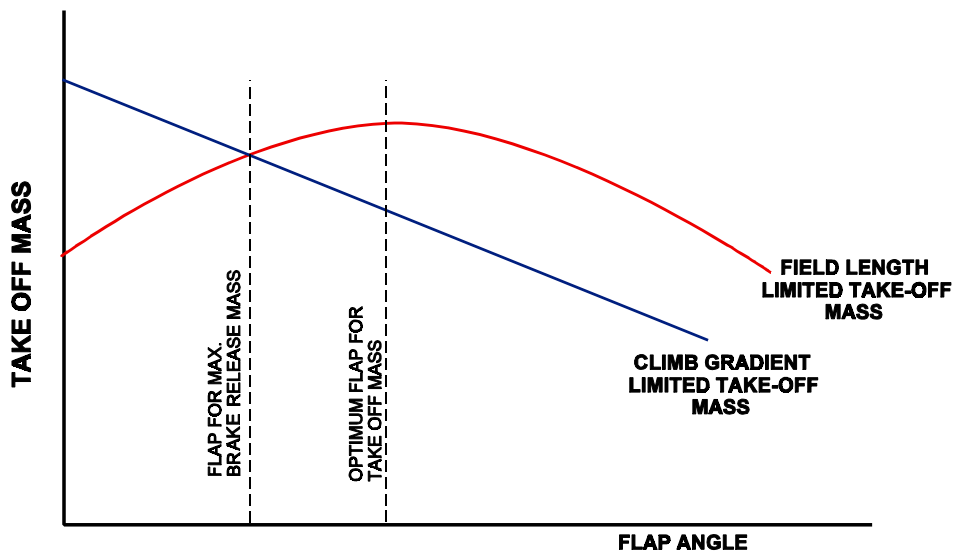


Figure 2.5 A graph showing the effect of flap on the climb and field limit mass

If there are obstacles to be considered in the take-off flight path, the flap setting that gives the shortest take-off distance may not give the maximum possible take-off mass if the Take-off Distance Available is greater than the Take-off Distance Required. If close-in obstacles are not cleared, using a lower flap angle will use a greater proportion of the Take-off Distance Available but may give a sufficiently improved gradient to clear the obstacles

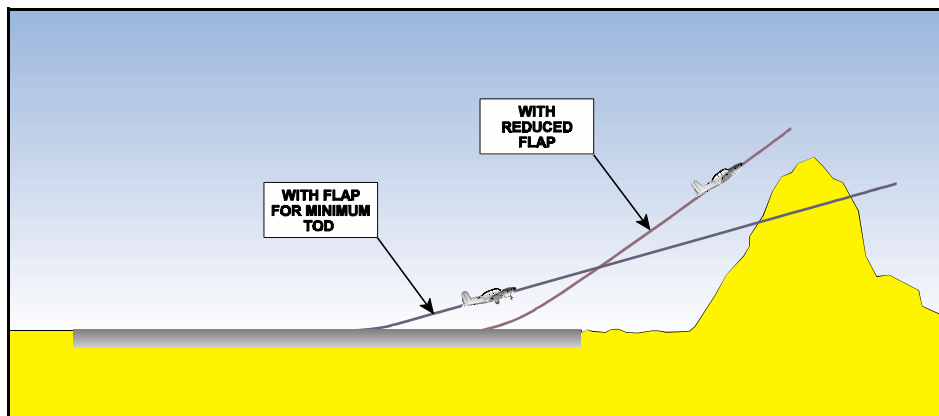


Figure 2.6 An illustration showing the effect of flap angle on obstacle clearance

QUESTIONS

1. How is wind considered in the take-off performance data of the Aeroplane Operations Manuals?
 - a. Unfactored headwind and tailwind components are used.
 - b. Not more than 80% headwind and not less than 125% tailwind.
 - c. Since take-offs with tailwind are not permitted, only headwinds are considered.
 - d. Not more than 50% of a headwind and not less than 150% of the tailwind.

 2. What will be the influence on the aeroplane performance if aerodrome pressure altitude is increased?
 - a. It will increase the take-off distance.
 - b. It will decrease the take-off distance.
 - c. It will increase the take-off distance available.
 - d. It will increase the accelerate stop distance available.

 3. The required Take-off Distance (TOD) and the field length limited Take-off Mass (TOM) are different for the zero flap case and take-off position flap case. What is the result of flap setting in take-off position compared to zero flap position?
 - a. Increased TOD required and decreased field length limited TOM.
 - b. Increased TOD required and increased field length limited TOM.
 - c. Decreased TOD required and decreased field length limited TOM.
 - d. Decreased TOD required and increased field length limited TOM.

 4. The take-off distance available is:
 - a. the total runway length, without clearway even if this one exists.
 - b. the length of the take-off run available plus the length of the clearway available.
 - c. the runway length minus stopway.
 - d. the runway length plus half of the clearway.

 5. During take-off, the thrust of a fixed pitch propeller:
 - a. increases slightly while the aeroplane speed builds up.
 - b. varies with mass changes only.
 - c. has no change during take-off and climb.
 - d. decreases while the aeroplane speed builds up.

 6. What will be the effect on an aeroplane's performance if aerodrome pressure altitude is decreased?
 - a. It will increase the take-off distance required.
 - b. It will increase the take-off ground run.
 - c. It will decrease the take-off distance required.
 - d. It will increase the accelerate stop distance.
-

7. The take-off distance of an aircraft is 800m in a standard atmosphere with no wind and at 0 ft pressure altitude. Using the following corrections:
± 20 m / 1 000 ft field elevation
- 5 m / kt headwind
+ 10 m / kt tail wind
± 15 m / % runway slope
± 5 m / °C deviation from standard temperature
The take-off distance from an airport at 2 000 ft elevation, temperature 21°C, QNH 1013.25 hPa, 2% up-slope, 5 kt tail wind is:
- 810 m
 - 970 m
 - 890 m
 - 870 m
8. An uphill slope:
- increases the take-off distance more than the accelerate stop distance.
 - decreases the accelerate stop distance only.
 - decreases the take-off distance only.
 - increases the allowed take-off mass.
9. Other factors remaining constant and not limiting, how does increasing pressure altitude affect allowable takeoff mass?
- Allowable take-off mass remains uninfluenced up to 5000 ft pressure altitude.
 - Allowable take-off mass decreases.
 - Allowable take-off mass increases.
 - There is no effect on allowable take-off mass.
10. In reality, the net thrust of a jet engine at constant RPM:
- does not change with changing altitude.
 - is independent of the airspeed.
 - decreases with the airspeed.
 - increases with the airspeed.
11. Which of the following are to be taken into account for the runway in use for take-off?
- Airport elevation, runway slope, standard temperature, pressure altitude and wind components.
 - Airport elevation, runway slope, outside air temperature, standard pressure and wind components.
 - Airport elevation, runway slope, outside air temperature, pressure altitude and wind components.
 - Airport elevation, runway slope, standard temperature, standard pressure and wind components.
12. For a take-off in slush, the slush drag:
- Will increase up to aquaplane speed and then remain constant.
 - Will increase up to aquaplane speed and then decrease.
 - Will increase up to aquaplane speed and then increase at a greater rate.
 - Will decrease progressively up to the lift off speed.

13. With contamination on the aircraft wings and fuselage only:
- The TODR will be unaffected.
 - The ASDR will decrease.
 - Stalling speed is not affected.
 - The lift off speed will be increased.
14. The gross take-off distance (TOD) is defined as being from brake release until:
- The aeroplane's main wheel lifts off the runway.
 - The aeroplane has reached 35 ft.
 - The aeroplane has reached the screen height.
 - The aeroplane is safely off the ground.
15. The result of a higher flap setting up to the optimum at take-off is:
- a higher VR.
 - a longer take-off run.
 - a shorter ground roll.
 - an increased acceleration.
16. VR is the speed at which:
- The aeroplane nose wheel is off the ground.
 - The pilot initiate the action required to raise the nose wheel off the ground.
 - The main wheels lift off the ground.
 - The aeroplane rotates about the longitudinal axis.
17. During take-off:
- The acceleration force decreases.
 - Wheel drag increases.
 - Thrust increases.
 - Total drag decreases.
189. High altitudes, hot air and humid conditions will:
- Increase the take-off payload.
 - Decrease the take-off mass.
 - Increase the take-off performance.
 - Decrease the take-off distance.
19. The main purpose for taking off into wind is to:
- Decrease the true ground speed.
 - Decrease the aeroplane performance.
 - Increase the true ground speed.
 - Increase the take-off distance.
20. What is the effect of a contaminated runway on the take-off?
- Increases the take-off distance and greatly increases the accelerate stop distance.
 - Increases the take-off distance and decreases the accelerate stop distance.
 - Decreases the take-off distance and increases the accelerate stop distance.
 - Decreases the take-off distance and greatly decreases the accelerate stop distance.

21. Which of the following statements is correct?
- If a clearway or a stopway is used, the lift-off point must be attainable at least by the end of the permanent runway surface.
 - A stopway means an area beyond the take-off run available, able to support the aeroplane during an aborted take-off.
 - An under-run is an area beyond the runway end which can be used for an aborted take-off.
 - A clearway is an area beyond the runway which can be used for an aborted take-off.
22. A 'Balanced Field Length' is said to exist where:
- The accelerate stop distance available is equal to the take-off distance available.
 - The clearway does not equal the stopway.
 - The accelerate stop distance is equal to the all engine take-off distance.
 - The one engine out take-off distance is equal to the all engine take-off distance.
23. The stopway is an area which allows an increase only in:
- the accelerate-stop distance available.
 - the take-off run available.
 - the take-off distance available.
 - the landing distance available.
24. An airport has a 3,000 metres long runway, and a 2,000 meter clearway at each end of that runway. For the calculation of the maximum allowed take-off mass, the take-off distance available cannot be greater than:
- 4,000 metres.
 - 3,000 metres.
 - 5,000 metres.
 - 4,500 metres.
25. Can the length of a stopway be added to the runway length to determine the take-off distance available?
- Yes, but the stopway must be able to carry the weight of the aeroplane.
 - Yes, but the stopway must have the same width as the runway.
 - No.
 - No, unless its centreline is on the extended centreline of the runway.
26. In relation to runway strength, the ACN:
- Must not exceed 90% of the PCN and then only if special procedures are followed
 - May exceed the PCN by up to 10% or 50% if special procedures are followed
 - May exceed the PCN by a factor of 2
 - Must equal the PCN
27. The TODA is:
- Declared runway length only
 - Declared runway length plus clearway
 - Declared runway length plus stopway
 - Declared runway length plus clearway and stopway

28. Take-off distance available is?
- Take-off run available plus clearway
 - Take-off run minus the clearway, even if clearway exists
 - Always 1.5 times the TORA
 - 50% of the TORA.
29. Can a clearway be used in the accelerate stop distance calculations?
- Yes
 - No
 - Only if the clearway is shorter than the stopway
 - Only if there is no clearway
30. The take-off distance available is?
- The total runway length, without clearway even if this one exists.
 - The length of the take-off run available plus any length of clearway available, up to a maximum of 50% of TORA.
 - The runway length minus stopway.
 - The runway length plus half of the clearway.
31. The stopway is:
- at least as wide as the runway.
 - no less than 152 wide.
 - no less than 500 ft wide.
 - as strong as the main runway .
32. Which class of aeroplane describes all multi-engine turbo-jet aeroplanes?
- Unclassified.
 - Class C.
 - Class B.
 - Class A.
33. A propeller aeroplane with nine or less passenger seats and with a maximum take-off mass of 5,700 kg or less is described as:
- Unclassified.
 - Class C.
 - Class B.
 - Class A.

ANSWERS

1	D	11	C	21	B	31	A
2	A	12	B	22	A	32	D
3	D	13	D	23	A	33	C
4	B	14	C	24	D		
5	D	15	C	25	C		
6	C	16	B	26	B		
7	B	17	A	27	B		
8	A	18	B	28	A		
9	B	19	A	29	B		
10	C	20	A	30	B		

CHAPTER THREE

GENERAL PRINCIPLES - CLIMB AND DESCENT

Contents

CLIMB	157
ANGLE OF CLIMB.	157
EXCESS THRUST	159
THE EFFECT OF WEIGHT ON CLIMB ANGLE	161
THRUST AVAILABLE	161
CALCULATING CLIMB GRADIENT	162
CLIMBING AFTER AN ENGINE FAILURE	163
THE CLIMB ANGLE (FLIGHT PATH ANGLE) - GAMMA	165
CALCULATING GROUND GRADIENT	182
RATE OF CLIMB	186
FACTORS AFFECTING RATE OF CLIMB	192
FACTORS AFFECTING DESCENT	204
CLIMB QUESTIONS.	208
DESCENT QUESTIONS.	215
ANSWERS	218

CLIMB

The climb section of aircraft performance deals with the analysis of that stage of flight from the end of the take-off phase to the beginning of the en-route phase. There are two ways in which climbing needs to be examined; the angle of climb and the rate of climb.

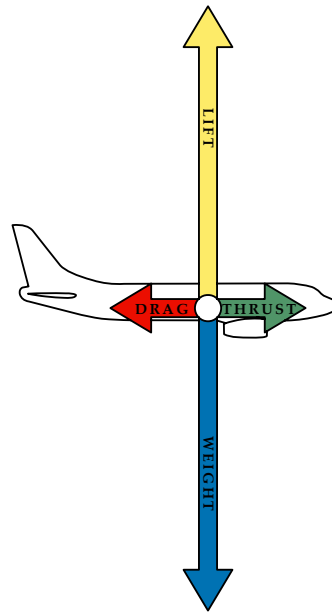


Figure 3.1

ANGLE OF CLIMB

Angle of climb will be examined first. Figure 3.1 shows an aircraft in un-accelerated level flight. Notice that the forward acting force, Thrust, balances the rearward acting force, Drag. Therefore, the aircraft will maintain a steady speed. How much Thrust is required for un-accelerated level flight? The same as the aerodynamic Drag. A frequently used alternative term for Drag is "Thrust Required".

However, if the aircraft is placed in a climb attitude, as shown in Figure 3.2, a component of the aeroplane's Weight acts backwards along the flight path and is added to Drag.

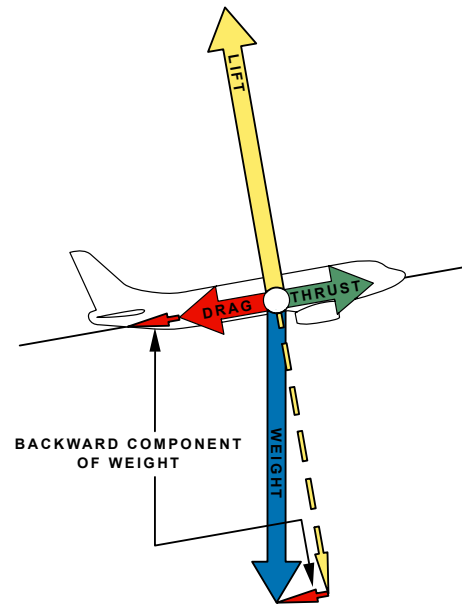


Figure 3.2

The larger the angle of climb, the larger the backward component of Weight, as shown in Figure 3.3. In both illustrations it is apparent that the sum of the two rearward acting forces is greater than the forward acting force. If this situation were left unchanged the aircraft would decelerate.

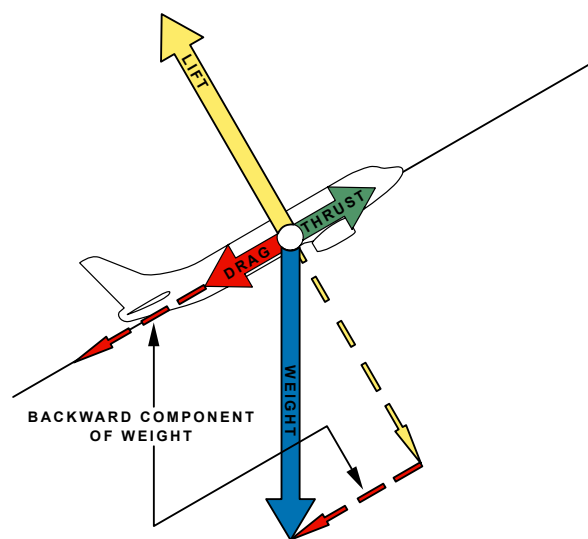


Figure 3.3

EXCESS THRUST

To maintain a steady speed along the flight path in a climb, additional Thrust is required to balance the backward component of Weight. This additional Thrust required is called Excess Thrust.

Excess Thrust is the Thrust available from the engine(s) after aerodynamic Drag is balanced.

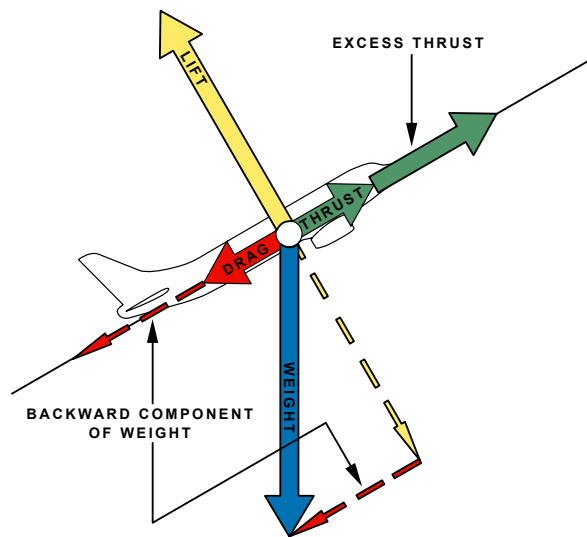


Figure 3.4

From Figure 3.4 it can be seen that the forward acting force in green, is now the same as the two rearward acting forces in red and the aeroplane will maintain a steady speed along its new flight path. To maintain a steady climb with no loss of speed, Thrust must balance not only the aerodynamic Drag, but also the backward component of Weight.

In Figure 3.5 the aircraft only has a small amount of Excess Thrust available. Notice that there is too much backward component of Weight from the climb angle that has been set, so that climb angle can not be maintained.

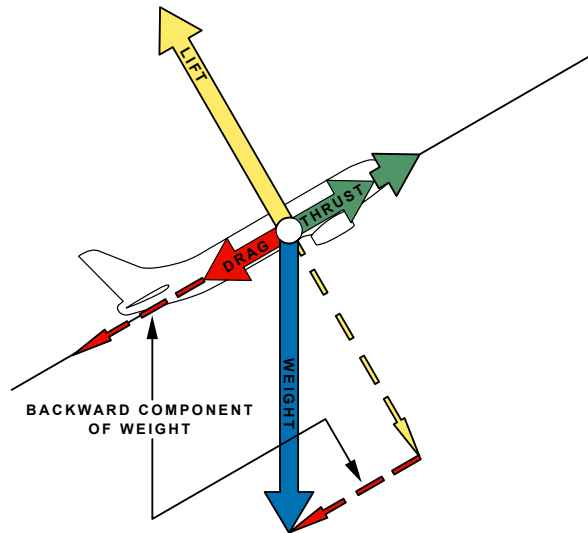


Figure 3.5

The angle of climb must be reduced to give a smaller backward component of Weight that matches the Excess Thrust available, as shown in Figure 3.6. The greater the Excess Thrust, the larger the backward component of Weight that can be balanced.

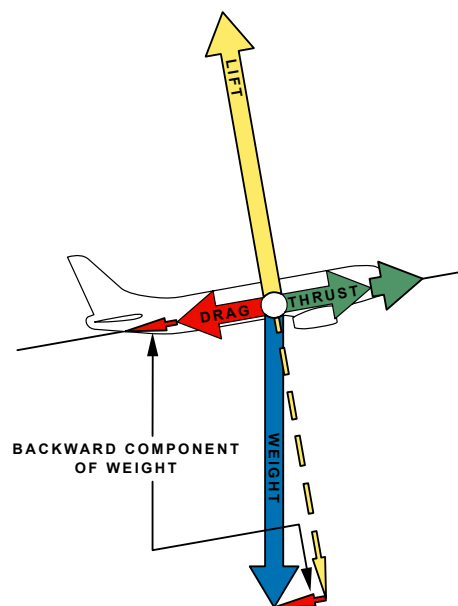


Figure 3.6

In other words, the more Excess Thrust available, the steeper the angle of climb or the greater the weight at the same climb angle.

THE EFFECT OF WEIGHT ON CLIMB ANGLE

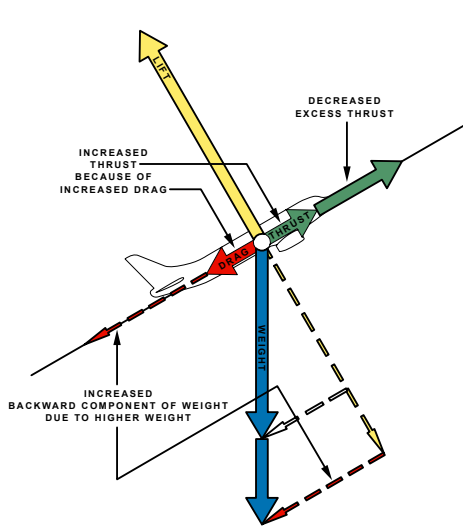


Figure 3.7

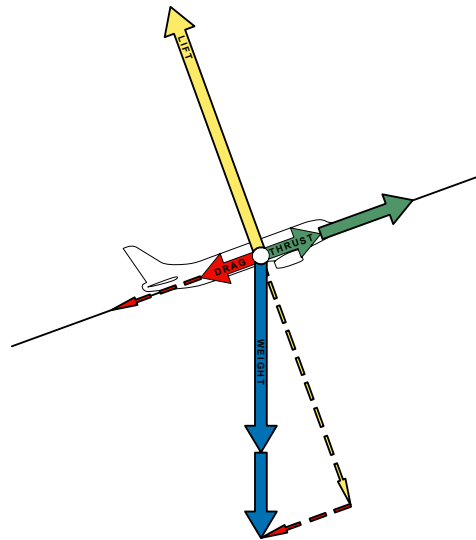


Figure 3.8

Weight has an influence on climb performance. Figure 3.7 illustrates that if the aircraft tries to use the same climb angle as before, but at a higher weight, the backward component of weight will be greater and there is insufficient Excess Thrust to balance it. In addition, the higher weight will also generate increased aerodynamic Drag (Induced), which will further reduce Excess Thrust. Increased weight therefore decrease the maximum climb angle, as shown in Figure 3.8.

THRUST AVAILABLE

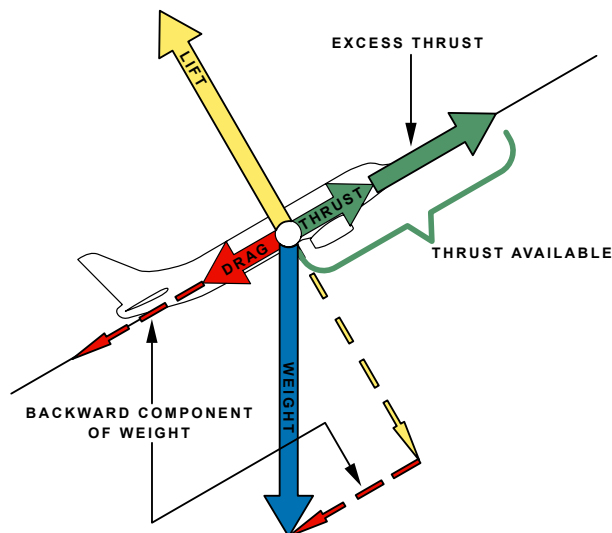


Figure 3.9

Figure 3.9 shows that Thrust Available is the total amount of Thrust available from the engine(s) and under a given set of conditions and in a steady climb the thrust available must be the same as the sum of the aerodynamic Drag (D) plus the backward component of Weight ($W \sin \gamma$).

CALCULATING CLIMB GRADIENT

If Thrust Available and aerodynamic Drag are known, the maximum backward component of Weight can be calculated by subtracting the aerodynamic Drag from Thrust Available. For most purposes, climb gradient is used rather than climb angle, but climb angle is still an important factor. Climb gradient is merely the percentage of the backward component of Weight to the aircraft Weight.

Shown here is the formula to calculate the percentage climb gradient. This formula is very significant.

$$\text{Gradient \%} = \frac{T - D}{W} \times 100$$

Merely by looking at the above formula certain facts are self evident:

- For a given weight, the greater the "Excess Thrust" (T – D) the steeper the climb gradient. The less the Excess Thrust the more shallow the climb gradient.
- For a given Excess Thrust (T – D), the greater the weight the more shallow the climb gradient. The less the weight the steeper the climb gradient.

If representative values of Thrust, Drag and Weight are known the % climb gradient can be calculated. For example:

A twin engine turbojet aircraft has engines of 60,000N each; its mass is 50 tonnes and it has a L/D of 12:1, what is the % climb gradient? Use 'g' = 10m/s/s.

From the above information the values to include in the formula have to be derived:

Thrust = 60,000N x 2 engines = 120,000N

Drag = Weight / 12

Weight = 50 tonnes x 1000 = 50,000kg x 10m/s/s = 500,000N

Drag therefore = 500,000N / 12 = 41,667N

$$\frac{120,000\text{N} - 41,667\text{N}}{500,000\text{N}} \times 100 = \frac{78,333\text{N}}{500,000\text{N}} \times 100 = 15.7\%$$

Let us now consider the same values, but with one engine failed:

$$\frac{60,000\text{N} - 41,667\text{N}}{500,000\text{N}} \times 100 = 3.7\%$$

Thrust has decreased by 50%, but climb gradient has decreased by approximately 75% or to one quarter of the gradient possible with all engines operating. This fact is very significant. After losing 50% of the Thrust Available, why did the gradient decrease by 75%?

NOTE: The aircraft data gave the L/D ratio from which the value of Drag was extracted, yet the value of Lift is obviously less than Weight when the aircraft is in a steady climb. Isn't this an inaccurate value? If the climb angle is less than approximately 20 degrees, and it always will be, the difference in the magnitude of Lift and Weight in a steady climb is insignificant and can be considered (For purposes of these and other calculations) to be the same.

CLIMBING AFTER AN ENGINE FAILURE

Consider Figure 3.10: Losing 50% of the Thrust Available reduces Excess Thrust by approximately 75% because the same value of aerodynamic Drag must still be balanced. Figure 3.11 emphasises that a two engine aeroplane with one engine inoperative, has a severely reduced ability to climb.

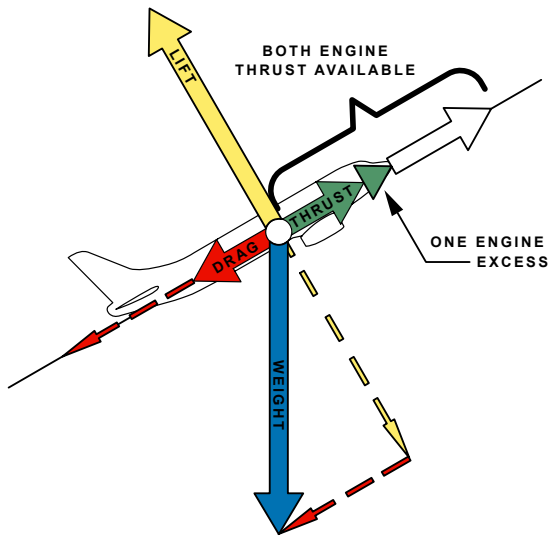


Figure 3.10

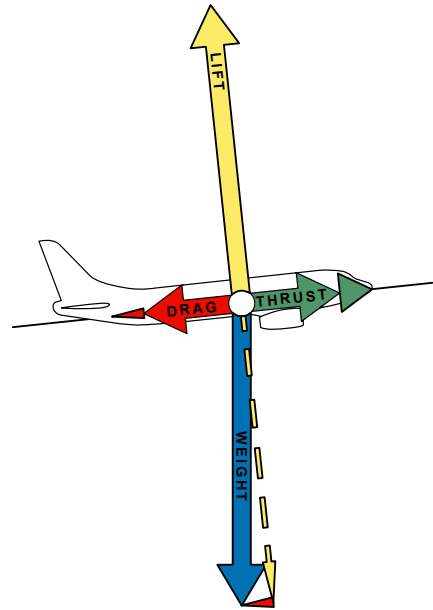


Figure 3.11

THE EFFECT OF FLAPS ON CLIMBING

High Lift Devices (Flaps) increase aerodynamic Drag. From the study of Principles of Flight it was learned that the purpose of Flaps is to reduce the take-off and landing run. Figure 3.12 and Figure 3.13 show it is obvious that Flaps reduce the climb angle because they increase aerodynamic Drag and therefore decrease Excess Thrust.

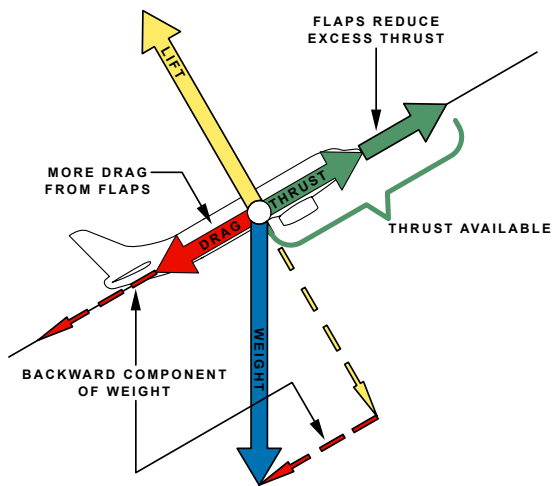


Figure 3.12

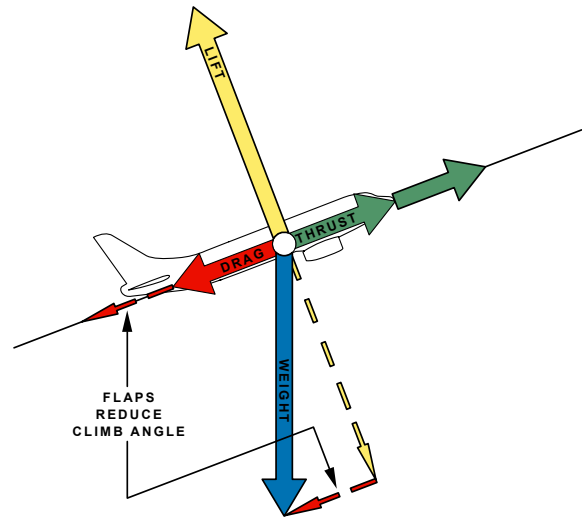


Figure 3.13

THE CLIMB ANGLE (FLIGHT PATH ANGLE) - GAMMA

Figure 3.14 includes the symbol used for climb angle, the Greek letter GAMMA. Note that the angle between the horizontal and the flight path (Climb Angle) is exactly the same as the angle between the Weight vector and the transposed Lift vector. We will be using climb angle for the FREE AIR climb.

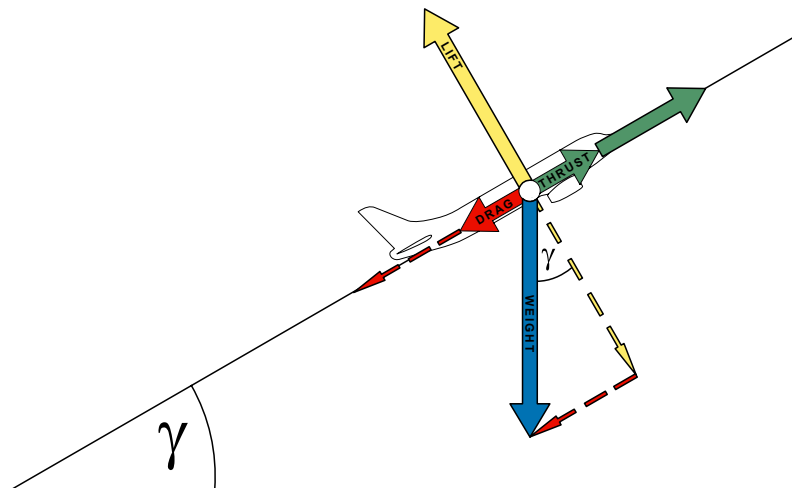


Figure 3.14

When an aeroplane is in a steady climb there will be a gain in height after a given horizontal distance travelled. This relationship is the % Climb Gradient. The calculation on page 152 gave 15.7% climb gradient, all engines. From Figure 3.9 it can be visualised that for 100 units of horizontal travel, the aeroplane will be 15.7 units higher. This is a fundamental concept.

For example: an aircraft with a climb gradient of 15.7% all engines operating, will be 314ft higher after travelling 2000ft horizontally, but the one engine inoperative climb gradient of 3.7%, will only give a height gain of 74ft in the same distance.

Horizontal distance = 2000ft

Gradient = 15.7% (For every 100ft horizontally, a height gain of 15.7ft)

$$\frac{200 \text{ ft}}{100} = 20$$

$$20 \times 15.7 = 314 \text{ ft} \quad (\text{All engines})$$

Gradient = 3.7% (For every 100ft horizontally, a height gain of 3.7ft)

$$20 \times 3.7 = 74 \text{ ft} \quad (\text{One engine inoperative})$$

PARASITE DRAG CURVE

An easy way to visualise how an aeroplane can maximize Excess Thrust and therefore its climb angle is to use a simple graph showing the relationship between Thrust and Drag under various conditions. But first, the parts of the Drag curve will be studied in detail.

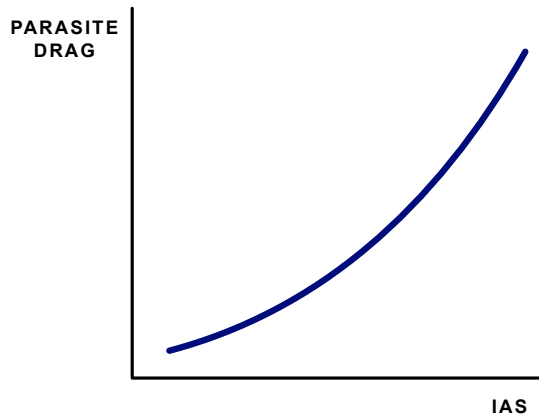


Figure 3.15

Figure 3.15 shows Parasite Drag increasing with the square of the IAS. (Parasite Drag is proportional to IAS squared). If IAS is doubled, Parasite Drag will be increased four times. Note that at low speed Parasite Drag is small, but reaches a maximum at high IAS. Parasite Drag will increase with increasing "Parasite Area" (Flaps, undercarriage or speed brakes).

INDUCED DRAG CURVE

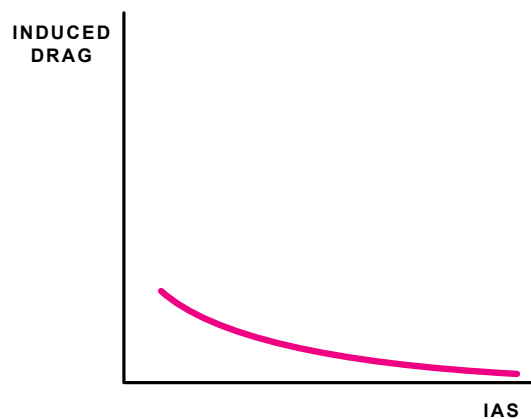


Figure 3.16

Figure 3.16 shows Induced Drag decreasing with IAS squared. (Induced Drag is inversely proportional to IAS squared). If IAS is doubled, Induced Drag will be decreased to one quarter of its previous value). Note that Induced Drag is at its highest value at low IAS, but decreases with increasing IAS. Induced Drag will vary with Lift production. Increasing the Weight or banking the aircraft will increase Induced Drag.

TOTAL DRAG CURVE

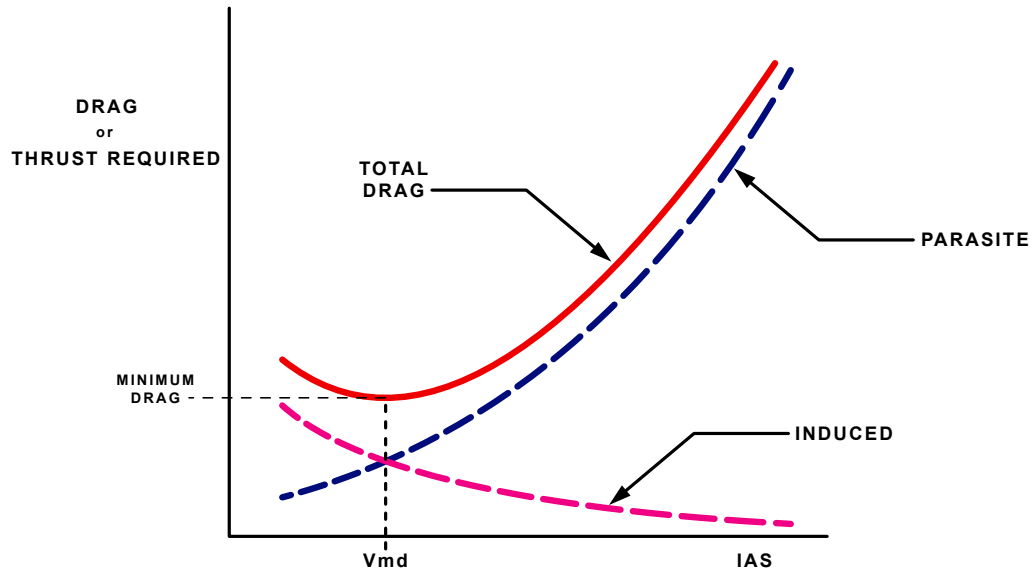


Figure 3.17

In flight, an aeroplane will experience both Parasite and Induced Drag. The sum of Parasite Drag and Induced Drag is called Total Drag. When only the word Drag is mentioned, the meaning is Total Drag. Figure 3.17 shows a Total Drag curve:

- At any given IAS, Total Drag is the sum of Parasite Drag and Induced Drag.
- The IAS at which Parasite Drag is the same value as Induced Drag will generate minimum Total Drag.
- The IAS that gives minimum Total Drag, is called “The Minimum Drag Speed” and is called V_{MD} .
- Flying at an IAS slower than V_{MD} will generate more Drag and flying at an IAS faster than V_{MD} will also generate more Drag.

Whenever Drag is being considered it is an excellent idea to develop the habit of sketching the Total Drag curve, together with the Parasite Drag and Induced Drag curves. This enables the result of any variable to be included and the correct conclusion obtained.

THE EFFECT OF WEIGHT OR BANK ANGLE ON DRAG

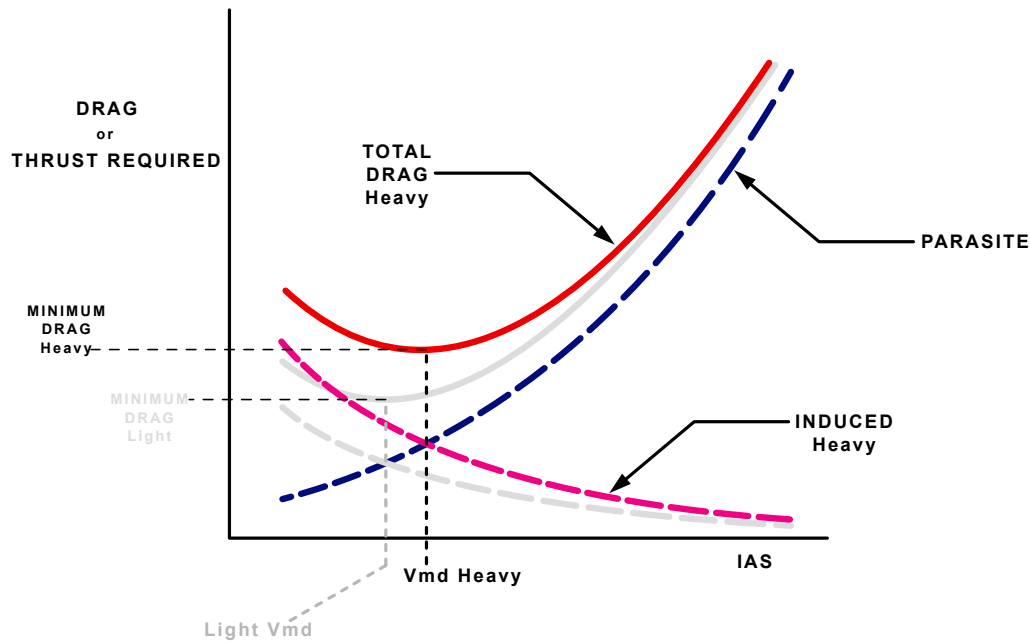


Figure 3.18

Figure 3.18 shows the affect of increased Weight and/or the effect of turning the aircraft. Induced Drag will be greater at a given IAS because Lift must be increased when the aircraft has more weight or when turning. The reason for the proportionally greater increase in Induced Drag at the low speed end of the graph is because Induced Drag is inversely proportional to IAS squared – therefore, at low speed the effect is greater.

The intersection of the Induced Drag curve and the Parasite Drag curve is further towards the high speed end of the graph and the sum of Induced Drag and Parasite is greater. Total Drag will increase and V_{MD} will be a faster IAS when an aircraft is operating at increased Weight or when turning,

Conversely, throughout flight Weight will decrease due to fuel use. As the aircraft becomes lighter, Total Drag will decrease and the IAS for V_{MD} will also decrease.

THE EFFECT OF FLAPS OR GEAR ON TOTAL DRAG

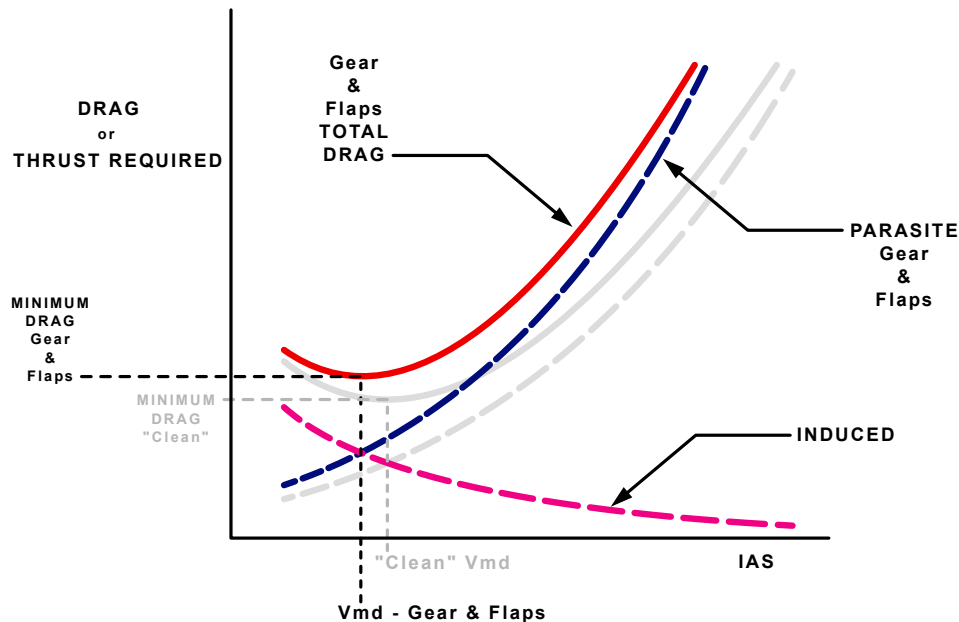


Figure 3.19

Figure 3.19 shows the affect of Flaps or Gear (Undercarriage). Parasite Drag will be greater at a given IAS because the Parasite area will be increased. When both Flaps and the Gear are fully retracted, the aircraft is said to be in the Clean configuration or the aircraft is Clean. The reason for the proportionally greater increase in Parasite Drag at the high speed end of the graph is because Parasite Drag is proportional to IAS squared – therefore, at high speed, the effect is greater. The intersection of the parasite Drag curve and the Induced Drag curve is further towards the low speed end of the graph and the sum of Parasite Drag and Induced Drag is greater. Total Drag will increase and V_{MD} will be a lower IAS when either the Flaps or Gear are lowered.

THRUST

Thrust is the force required to balance aerodynamic Drag; plus the backward component of Weight when the aircraft is in a steady climb. A turbo-jet engine generates Thrust by accelerating a mass of air rearwards. The variation of **Thrust Available** with forward speed is relatively small and the engine output is nearly constant with changes in IAS.

$$\text{Thrust Available} = \text{Mass Flow} \times \text{Acceleration (Exhaust velocity} - \text{Intake velocity)}$$

Since an increase in speed will increase the magnitude of intake velocity, constant **Thrust Available** will only be obtained if there is an increase in Mass Flow or Exhaust velocity. When the aircraft is at low forward speed, any increase in speed will reduce the velocity change through the engine without a corresponding increase in Mass Flow and **Thrust Available** will decrease slightly. When the aircraft is flying at higher speed, the ram effect helps to increase mass flow with increasing forward speed and **Thrust Available** no longer decreases, but actually increases slightly with speed.

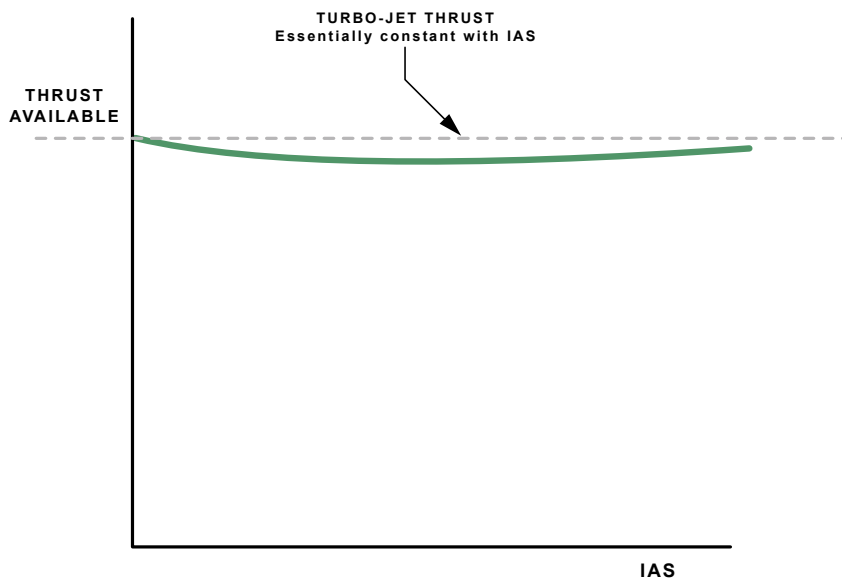


Figure 3.20

For a given engine RPM and operating altitude, the variation of turbo-jet Thrust with speed is shown in Figure 3.20.

Because turbo-jet Thrust is essentially constant with speed, unless the take-off run is being considered, future illustrations will display **Thrust Available** from the turbo-jet as a straight line.

VARIATION OF THRUST WITH DENSITY ALTITUDE

A turbo-jet engine is un-supercharged. Increasing Density Altitude (lower air density) will reduce the mass flow through the engine and **Thrust Available** will decrease. Obviously, this will have an affect when climbing, but also when operating at airfields with a High Pressure Altitude and/or a high Outside Air Temperature (OAT). As a reminder, Pressure Altitude can be determined on the ground by setting 1013mb on the altimeter sub-scale. If the altimeter reads 1000ft on the ground with 1013 on the sub-scale, the Pressure Altitude is 1000ft, irrespective of the actual height of the airfield above sea level. (The aeroplane will experience the air pressure that corresponds to 1000ft in the International Standard Atmosphere).

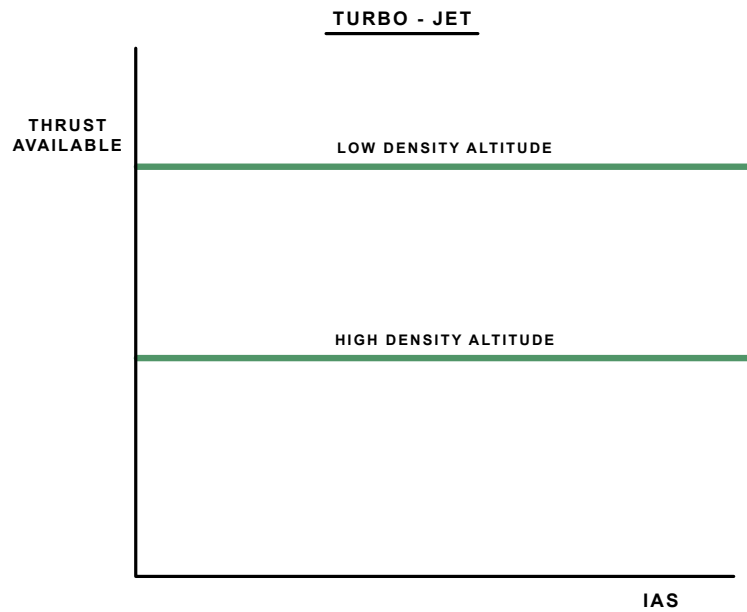


Figure 3.21

Figure 3.21 shows that **Thrust Available** has a lower value with increasing Density Altitude (Lower air Density).

VARIATIONS OF TAKE-OFF THRUST WITH AIR TEMPERATURE (OAT)

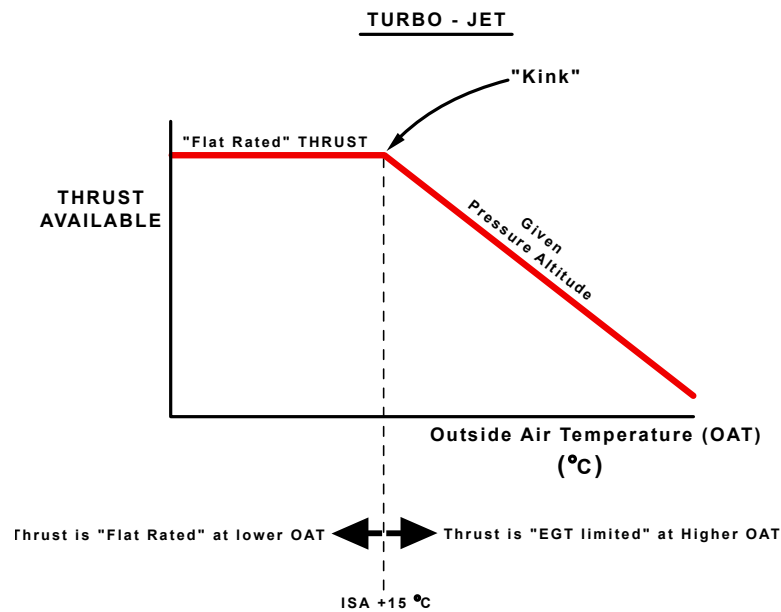


Figure 3.22

Generally, the Thrust of any turbo-jet engine is restricted by the maximum temperature the turbine blades can withstand. The more heat resistant the material from which the turbine blades are made and the more efficient the blade cooling, the higher the maximum turbine inlet temperature and therefore the greater the Thrust the engine can safely develop.

For a given engine, the higher the OAT the lower the mass air flow and therefore the lower the fuel flow before the maximum turbine inlet temperature is reached and consequently, the lower the Thrust the engine is able to develop – this is known as EGT limited Thrust.

Figure 3.22 should be read from right to left, and shows Thrust increasing with decreasing OAT at a given Pressure Altitude, but only down to an OAT of ISA +15C. Below ISA + 15C Thrust remains constant. This is the engines “Flat Rated” Thrust. At OAT’s below ISA +15C, Thrust is no longer limited by turbine inlet temperature but by the maximum air pressure the compressor is built to withstand. Below airport OAT’s of ISA + 15C it does not matter how far the flight crew advance the throttle, the engine management computer will maintain “Flat Rated” Thrust – this is the maximum certified Thrust of the engine.

From a Performance point of view, if engines are not “Flat Rated” and the throttles are fully advanced at OAT’s below ISA + 15C a lot more than maximum certified Thrust will be delivered. While this may not be immediately destructive to the engine if done occasionally, it completely compromises the certification of the aeroplane. Engine-out critical speeds (V_{MCG} , V_{MCA} and V_{MCL}) are based on the yawing moment generated at maximum certified Thrust. If significantly more Thrust is produced during one-engine-out flight with the IAS at the recommended minimum, directional control of the aeroplane will be lost.

Some Performance graphs incorporate the “Flat Rated” Thrust of the engine to allow determination of, for instance, the Climb Limit Take-off Weight. Climb Limit Take-off Weight will increase with decreasing OAT, but only down to ISA +15C. For each Pressure Altitude, an OAT lower than ISA +15C will not give an increase in Climb Limit Take-off Weight.

In the JAA Performance exam the ISA +15C temperature for each pressure altitude is referred to as the “kink” in the pressure altitude lines of CAP 698, Figures 4.4, 4.5 and 4.29. “The kink in the pressure altitude lines indicate the temperature, individually for each altitude, below which the Thrust will not increase with an increase in density”.

REGION OF REVERSE COMMAND

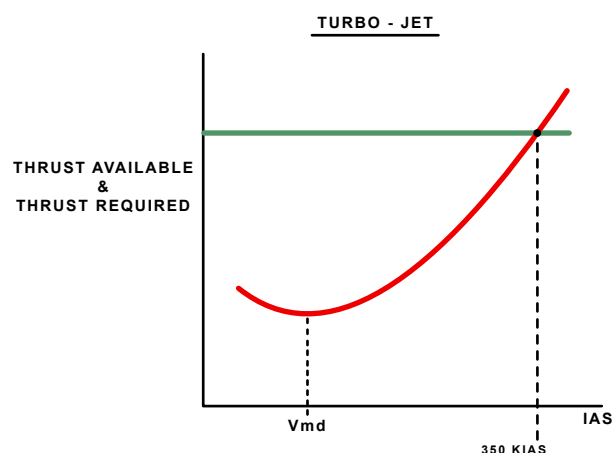


Figure 3.23

Thrust and Drag on the same graph will show the result of many variables. Figure 3.23 shows Thrust Available in green and Thrust Required in red. The intersection of the two curves will result in unaccelerated flight at a high speed of 350 KIAS.

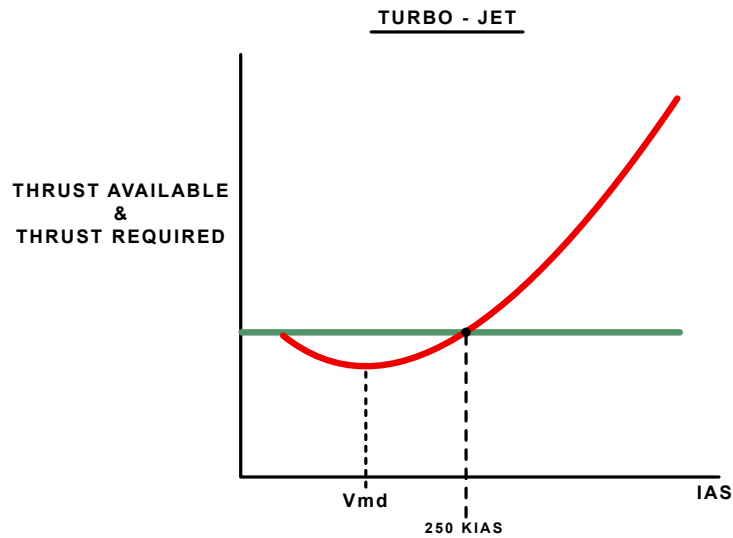


Figure 3.24

Figure 3.24 shows that to maintain unaccelerated flight at a lower speed of 250 KIAS, **Thrust Available** must be decreased and the aircraft slowed until **Thrust Required** reduces to the same value.

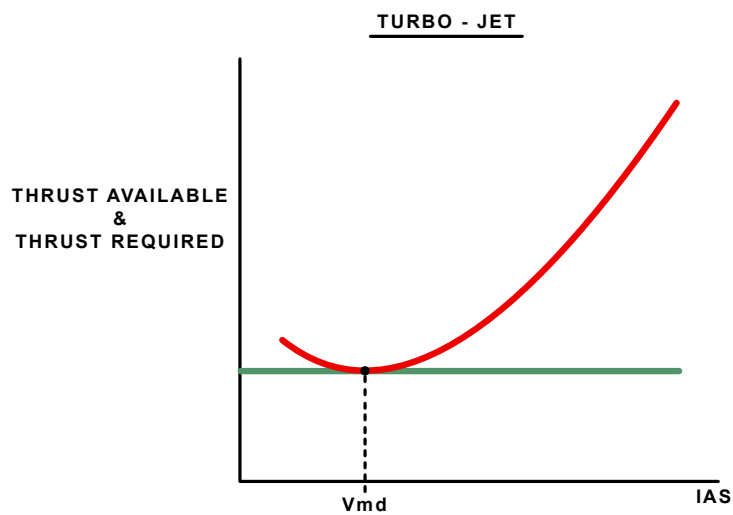


Figure 3.25

Figure 3.25 shows Thrust Available has been further reduced in order to maintain unaccelerated flight at Vmd, the minimum Drag speed.

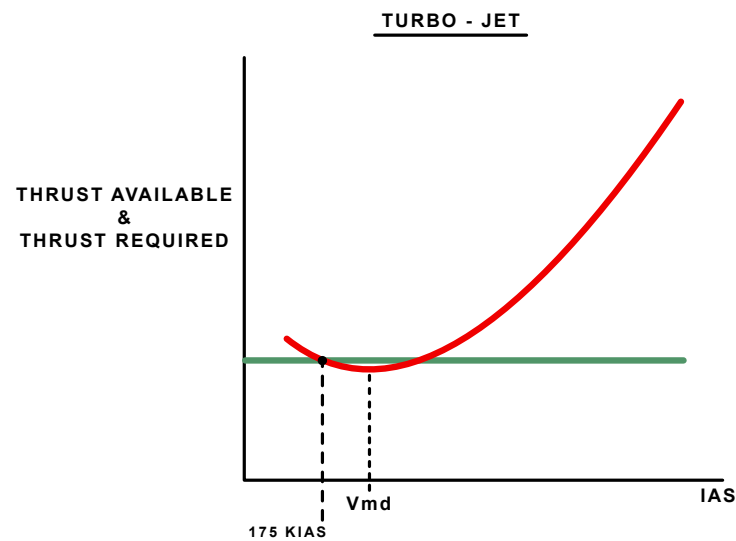


Figure 3.26

Figure 3.26 shows that to maintain unaccelerated flight at an IAS slower than V_{MD} , **Thrust Available** must be increased. This is because at speeds below V_{MD} , **Thrust Required** (Drag) increases. The speed region slower than V_{MD} has three alternative names:

- “The back-side of the Drag curve”,
- “The speed unstable region” and, perhaps the most descriptive,
- “The region of Reverse Command”: so called because to maintain unaccelerated flight at an IAS slower than V_{MD} , Thrust must be increased – the reverse of what is “Normally” required.

BEST ANGLE OF CLIMB SPEED (V_x)

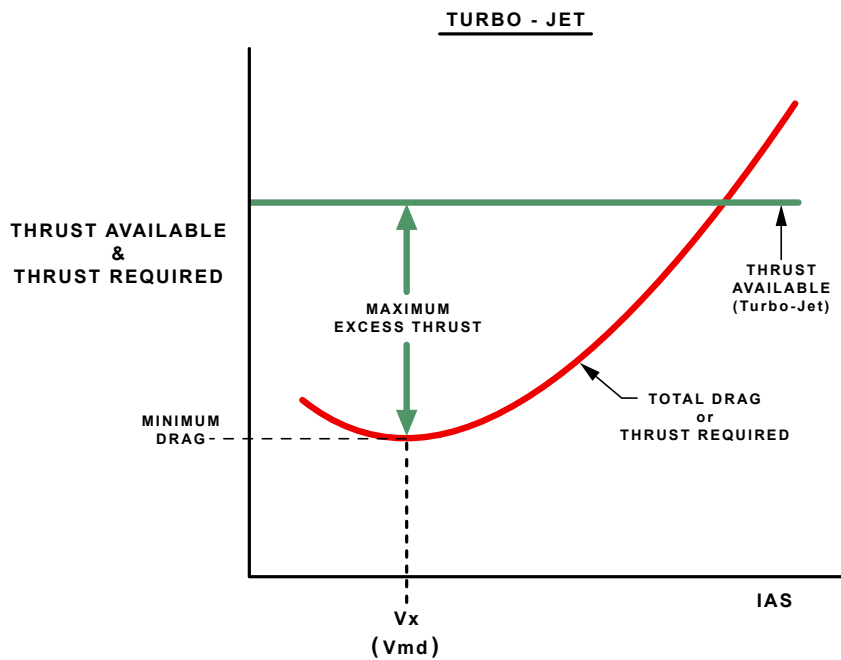


Figure 3.27

Figure 3.27 shows Thrust Required (Aerodynamic Drag) and Thrust Available (From the engines) for an aeroplane powered by turbo-jet engines.

Excess Thrust is the amount of Thrust that exceeds aerodynamic Drag. Excess Thrust can be seen on the graph as the distance between the Thrust Available and Thrust Required lines. You will recall that to maximise the climb gradient, Excess Thrust must be a maximum. Maximum Excess Thrust is obtained by flying at the IAS where the distance between the Thrust and the Drag lines is maximum.

Notice that maximum Excess Thrust is available only at one particular IAS, labelled V_x . At any other speed, faster or slower, the distance between the Thrust and Drag curves is smaller and Excess Thrust is less. Therefore, climbing at an IAS other than V_x will give a climb gradient less than the maximum possible.

The IAS at which the aeroplane generates the greatest amount of Excess Thrust and is therefore capable of its steepest climb gradient, is called V_x . (V_x is referred to as the Best Angle of Climb Speed). From Figure xx it can be seen that for an aeroplane powered by turbo-jet engines, V_x is the same IAS as V_{MD} .

FACTORS AFFECTING ANGLE OF CLIMB

THE EFFECT OF WEIGHT

Viewing Thrust Required (Drag) and Thrust Available on the same graph will show any obvious changes in Excess Thrust and therefore maximum climb gradient. Any associated changes in the IAS for V_x can also be seen.

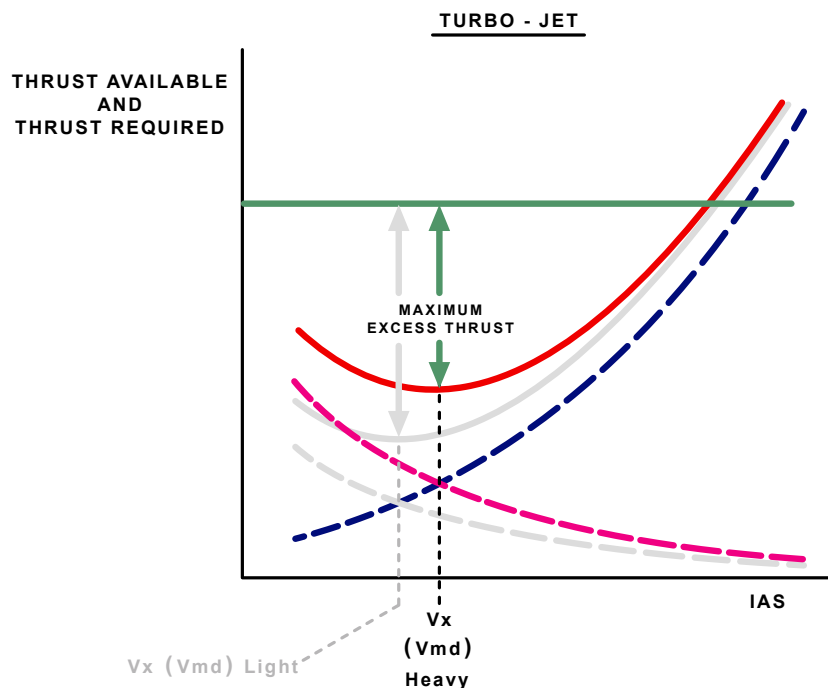


Figure 3.28

Figure 3.28 shows the result of increased weight on the steady climb. More weight requires more Lift, therefore Induced Drag will be greater. This moves the Total Drag curve up, but also to the right. Thrust Required is increased and V_x is a faster IAS. Because Thrust Required has increased, Excess Thrust is decreased, so maximum climb gradient is decreased. Remember the formula to calculate climb gradient?

$$\text{Gradient \%} = \frac{T - D}{W} \times 100$$

Merely by looking at the above formula certain facts are self evident:

- For a given Weight, the greater the “Excess Thrust” ($T - D$) the more times Weight will divide into the bigger value and therefore, the steeper the climb gradient. The less the **Excess Thrust** the more shallow the climb gradient.
- For a given **Excess Thrust** ($T - D$), the greater the Weight the fewer times Weight will divide into the same value and therefore, the more shallow the climb gradient. The less the weight the steeper the climb gradient.

Increased Weight reduces maximum climb gradient and increases V_x .

THE EFFECT OF FLAPS (OR GEAR)

Another factor that affects maximum climb angle is aircraft configuration. Configuration means whether the flaps (or gear) are extended, or not. If neither flaps (or gear) are extended the aircraft is said to be in the clean configuration. If flaps (or gear) are extended Parasite Drag will increase, but there will be no significant change in Induced Drag.

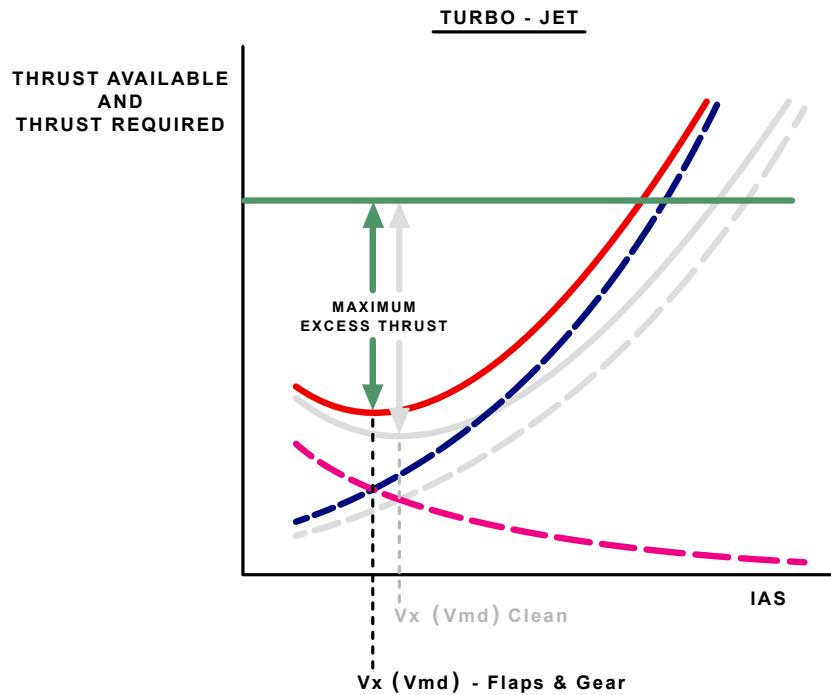


Figure 3.29

Figure 3.29 shows a steady climb with flaps (or gear) extended compared to the clean configuration. Parasite area is increased, therefore Parasite Drag will be greater. This moves the Total Drag curve up, but also to the left. Thrust Required is increased and V_x is a slower IAS. Because Thrust Required has increased, Excess Thrust is decreased, so maximum climb gradient is decreased.

Flaps or gear reduce maximum climb gradient and decrease V_x .

It therefore seems a very good idea to retract the gear as soon as possible after lift-off, after a positive rate of climb is achieved and also not to use flaps during a climb so that the climb angle is as large as possible. But, you may recall the purpose of flaps is to decrease the take-off and landing run. If it is necessary to use flaps for the take-off run, retract them in stages after take-off as soon as it is safe to do so. The regulatory flap retraction schedule will be discussed later.

THE AFFECT OF AIR DENSITY

- Air density affects the mass flow of air into the engine.
- A decrease in air density reduces Thrust Available, thus Excess Thrust is also decreased.

Therefore, the ability to climb decreases with decreasing air density.

Air density is presented on performance graphs as two components: Temperature and Pressure Altitude. (Pressure altitude is the reading on the altimeter when 1013mb is set on the sub-scale). Any variation in atmospheric pressure or temperature will change air density and therefore Excess Thrust.

Relevant aircraft performance graphs contain a horizontal axis of temperature and a series of sloping Pressure Altitude guide lines. An intersection of these two values will provide the necessary compensation for Density Altitude.

DENSITY ALTITUDE

Now might be a good time to review the meaning of Density Altitude. The "Official" definition can be confusing: "A high density altitude is one that represents a higher altitude in the International Standard Atmosphere". A fair explanation when one already understands what is meant, but of little instructional value. Air density cannot be "Sensed" or measured directly, but it can be calculated.

Let's say that you are on an airfield which is physically at sea level; the waves are lapping at the end of the runway. Due to existing meteorological conditions the air pressure is low (Lower than Standard sea level atmospheric pressure of 1013mb) and with 1013mb set on the altimeter sub-scale the altimeter reads 1000ft.

The reason the altimeter reads 1000ft is because the actual air pressure is the same as that at 1000ft in the International Standard Atmosphere - you are at "A high Pressure Altitude". Reduced air pressure will give reduced air density (Mass per unit volume). But air density is also affected by temperature. The "Standard" air temperature at 1000ft is 13 degrees C (Temperature lapse rate of 2 degrees C per 1000ft, so $15 - 2 = 13$), yet for this example, the actual Outside Air Temperature is measured at 25 degrees C. The actual air temperature is 12 degrees C higher than "Standard" ($25 - 13 = 12$). This is referred to as ISA+12. Now, either a table or a circular slide rule can be used to accurately determine the Density Altitude; in this case: approximately 2400ft. So, although the aircraft is physically at sea level, the air density is the same as that at approximately 2400ft in the International Standard Atmosphere. A turbo-jet engine would theoretically generate less thrust and the TAS would need to be higher for a given IAS.

For take-off and initial climb from the same airfield, any increase in pressure altitude or air temperature due to local meteorological conditions will reduce Excess Thrust and therefore the ability to climb (or accelerate). This is in addition to the more obvious decrease in air density during a climb to high altitude.

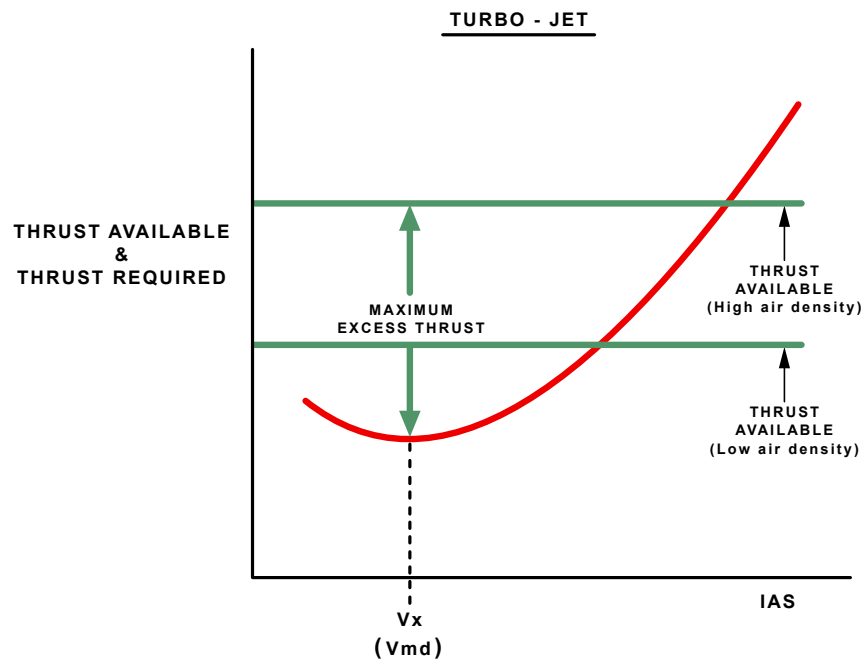


Figure 3.30

Any decrease in air density (Increase in Density Altitude) will reduce Thrust Available and therefore move the Thrust line downwards, as shown on the graph in Figure 3.30.

Because decreased density reduces Excess Thrust, maximum climb angle will be reduced. Excess Thrust will continually decrease with increasing Density Altitude so the maximum angle of climb will continually decrease as the aircraft climbs. Note that V_x will remain constant with changes in air density, because at a constant IAS (V_x) Drag will not vary. However, you will recall that as air density decreases, True Air Speed must be increased to maintain the required dynamic pressure.

So although the IAS for V_x is constant with increasing density altitude, the TAS for V_x will of course increase.

You may recall from earlier lessons that high humidity will also decrease air density and will therefore also decrease aeroplane performance. This is already factored into performance charts, so is not something you need to allow for. However, basic theory questions in the exam may require your knowledge of the fact.

THE AFFECT OF ACCELERATING ON CLIMBING

It has been stated that the ability of an aircraft to climb depends upon Excess Thrust, which is the amount of Thrust Available remaining after Drag is balanced. Hence an aircraft's maximum climb angle is limited by its maximum Excess Thrust. If there is a need to accelerate the aircraft while climbing or a need to climb while accelerating, some of the Excess Thrust must be used for the acceleration and therefore the maximum climb angle will be reduced.

THE AFFECT OF BANK ANGLE ON CLIMBING

When an aircraft is banked, any increase in bank angle beyond approximately 15 degrees will significantly increase the amount of Lift that needs to be generated. Increased Lift will generate more Induced Drag, so Excess Thrust will be reduced and therefore maximum climb angle will be reduced.

THE AFFECT OF WIND ON CLIMBING

The affect that wind has on climbing depends upon the type of climb gradient being considered, (wind being motion of a body of air over the ground). There are two types of climb gradient: Air gradient and Ground gradient. Air gradient is used by aviation authorities to lay down minimum climb performance limits. E.g. a Class 'A' aeroplane: "..... starting at the point at which the aeroplane reaches 400 ft (122 m) above the take-off surface, the available gradient of climb may not be less than 1.2% for two-engines aeroplanes".

AIR GRADIENT

Air gradient is the vertical distance gained in a body of air divided by the horizontal distance travelled through the same body of air. The fact that the body of air might be moving over the ground is NOT considered. So wind has no affect on Air gradient.

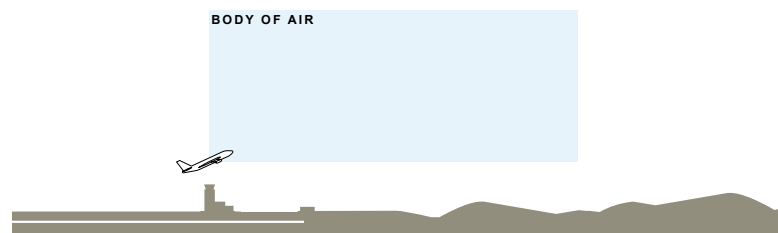


Figure 3.31

Figure 3.31 shows an aeroplane in the bottom left corner of a body of air, directly above the control tower on the ground.

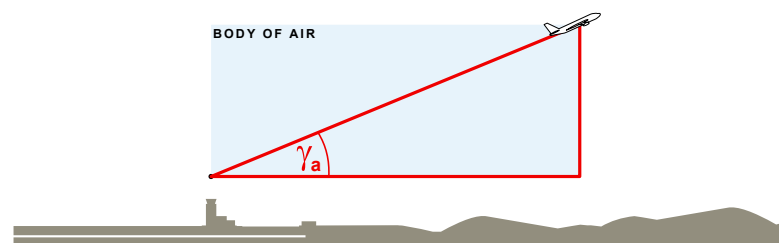


Figure 3.32

Figure 3.32 shows the body of air stationary relative to the ground; this is referred to as "Zero Wind" or "Still Air". The aeroplane has climbed to the top right corner of the body of air and the Air gradient is shown as Gamma 'a'.

Note: To simplify the study of climbing, for climb angles less than approximately 20 degrees, it is considered that doubling the climb angle will double the climb gradient.

GROUND CLIMB GRADIENT

γ_a = AIR GRADIENT (Not affected by wind)
Also known as the Climb Angle
 γ_g = GROUND GRADIENT (Influenced by wind)
Also known as the Flight Path Angle (FPA)

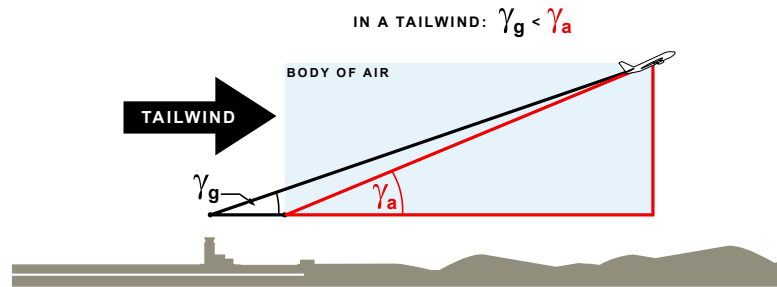


Figure 3.33

Figure 3.33 shows the affect of a tailwind. Because the body of air is moving over the ground in the direction of flight the Ground gradient is smaller than the Air gradient.

A tailwind does not change the Air gradient, but decreases the Ground gradient.

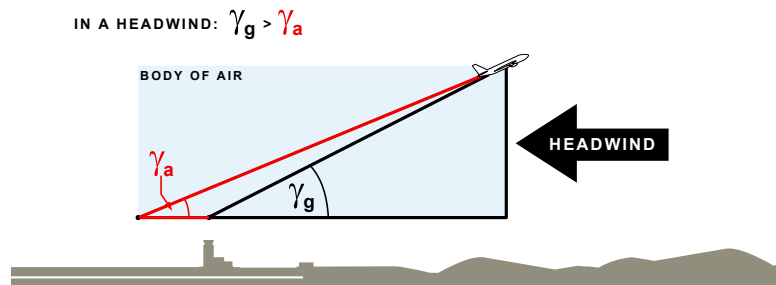


Figure 3.34

Figure 3.34 shows the affect of a headwind. Because the body of air is moving over the ground opposite to the direction of flight the Ground gradient is larger than the Air gradient.

A headwind does not affect the Air gradient, but increases the Ground gradient.

The only time wind is used to calculate climb gradient is when obstacle clearance is being considered. In all other cases of climbing, still air is used, even if a wind value is supplied.

CALCULATING GROUND GRADIENT

It is possible to calculate the Ground gradient by using a “wind factor” to correct the Air gradient for wind. Any gradient is the vertical distance divided by the horizontal distance.

$$\frac{(\text{TAS})}{(\text{GS})} \frac{100}{80} = 1.25 \qquad 12\% \times 1.25 = 15\%$$

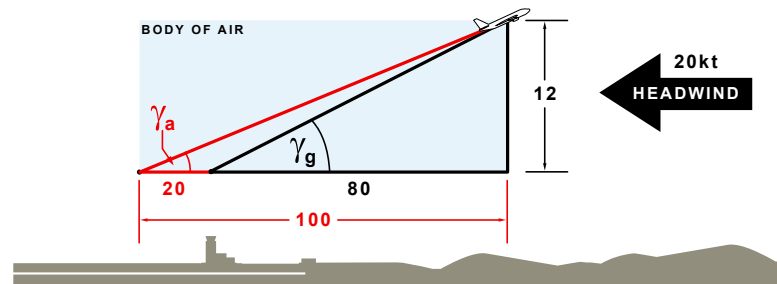


Figure 3.35

HEADWIND

Example 1: An aeroplane has an Air gradient of 12%, its TAS is 100 kt and the headwind is 20 kt. Calculate the Ground gradient. (Figure 3.35).

The 20 kt headwind makes the ground speed (GS) 80 kt ($100 - 20 = 80$). 100 TAS divided by 80 GS gives a wind factor of 1.25. Multiplying the Air gradient of 12% by the wind factor gives a Ground gradient of 15%.

Example 2: An Air gradient of 12% with a TAS of 160 kt and a headwind of 20 kt. 160 divided by 140 gives a wind factor of 1.14. Multiplying the Air gradient of 12% by the wind factor gives a Ground gradient of 13.7% ($12 \times 1.14 = 13.5$).

Note: It is important to remember that if the ground gradient is to be used for the calculation of obstacle clearance, the application of headwinds and tailwinds must include the 50% headwind and 150% tailwind rule.

However, this will only be asked of you in the exam as a statement of fact and any climb questions of the above and similar variety will not require the 50% headwind and 150% tailwind rule to be applied. Obstacle climb questions requiring the use of the graphs in CAP 698 have the wind rules included in the graphs. E.g. CAP 698 Figs 4.20, 4.21.

TAILWIND

$$\frac{\text{(TAS)} \ 100}{\text{(GS)} \ 120} = 0.83 \qquad 12\% \times 0.83 = 10\%$$

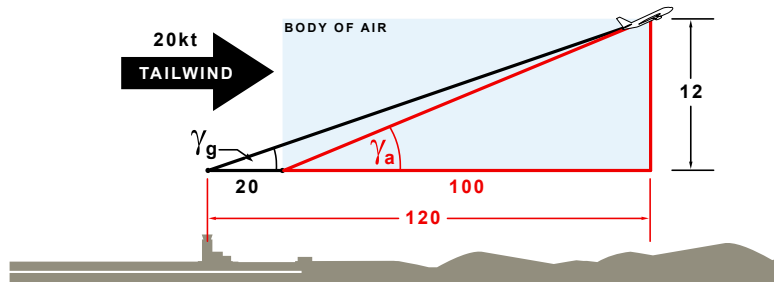


Figure 3.36

Example 3: the same Air gradient of 12% with a TAS of 100 kt but now a tailwind of 20 kt. In the above example, the 20 kt tailwind makes the ground speed (GS) 120 kt (100 + 20 = 120).

100 kt TAS divided by 120 kt GS gives a wind factor of 0.83. Multiplying the Air gradient of 12% by the wind factor gives a Ground gradient of 10% (12 x 0.83 = 9.96).

Example 4: an Air gradient of 12% with a TAS of 160 kt and a tailwind of 20 kt makes the ground speed (GS) 180 kt. 160 kt TAS divided by 180 kt GS gives a wind factor of 0.89. Multiplying the Air gradient of 12% by the wind factor gives a Ground gradient of 10.7% (12 x 0.89 = 10.7).

Having detailed the method of calculating Ground gradient from the Air gradient, we will now examine a typical climb gradient question.

Example 5: Determine the ground distance for a Class B aeroplane to reach a height of 2000 ft above Reference Zero in the following conditions:

- OAT: 25°C
- Pressure altitude: 1000 ft
- Gradient: 9.4%
- Speed: 100 KIAS
- Wind component: 15 kts Headwind

The question mentions 2000 ft above Reference Zero; what is Reference Zero? Reference Zero is the point on the runway or clearway plane at the end of the Take-Off Distance Required (Figure 3.37). It is the reference point for locating the start point of the take-off Flight Path.

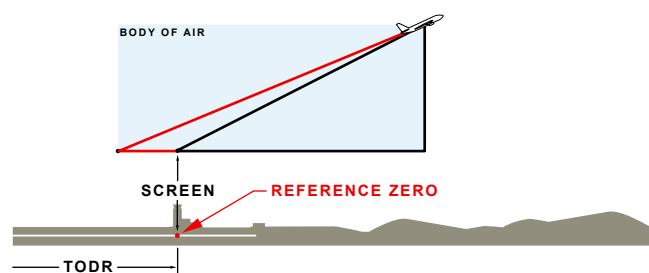


Figure 3.37

$$\frac{(\text{TAS}) 104}{(\text{GS}) 89} = 1.17 \qquad 9.4\% \times 1.17 = 11\%$$

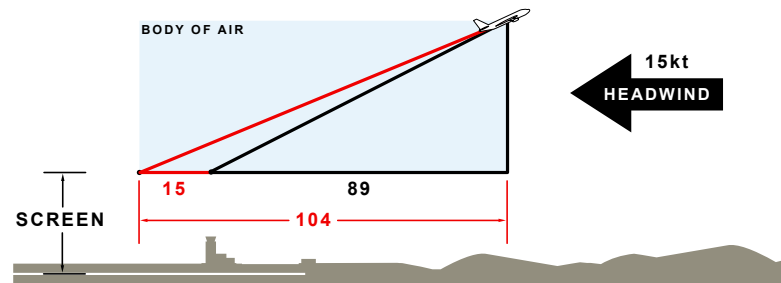


Figure 3.38

Figure 3.38 illustrates the data supplied in the question and calculation of the Ground Gradient from the Air gradient.

1. The TAS is calculated from the KIAS using your circular slide rule. (at 1000ft Pressure altitude and 25 deg C, 100 KIAS = 104 KTAS)
2. Due to the 15kt headwind, the Ground Speed will be $(104 \text{ KTAS} - 15 \text{ Kt}) = 89 \text{ KTAS}$. (Wind speed is always a TAS)
3. TAS divided by GS gives a wind factor of 1.17.
4. Multiplying the Air gradient by the wind factor gives a Ground gradient of 11% (Approximately).

It is always a good idea to “Draw” the question. Once the triangle has been sketched and the known parameters included, the visual relationship can be more easily considered.

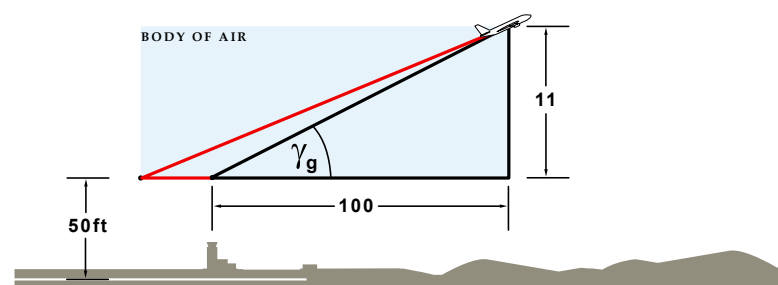


Figure 3.39

A Class B aeroplane is being considered, so the screen height is 50 ft. The climb segment begins at the screen height above Reference Zero. Therefore the aeroplane will only need to gain an additional 1950 ft to be 2000 ft above Reference Zero. An 11% gradient simply means that the aircraft will be 11 units higher after 100 units of horizontal travel.

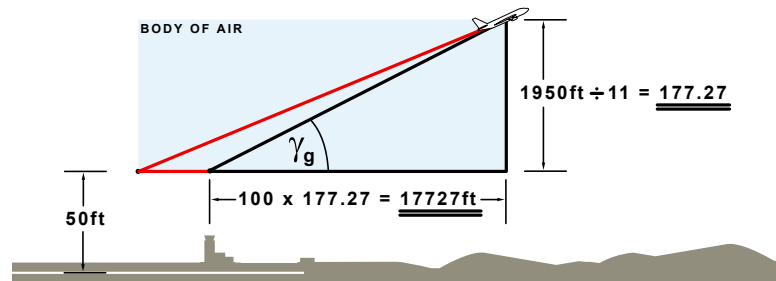


Figure 3.40

In this case the required vertical height gain is 1950 ft, so we need to discover how many times 11 will divide into 1950 ft ($1950 \text{ ft} / 11 = 177.27$). This means that the vertical height gain is 177.27 times greater, so the horizontal distance will also be 177.27 times greater. Multiplying 100 by 177.27 will give the horizontal distance travelled in feet, In this case, 17727 ft.

Example 6: Following take-off, a light twin engine aeroplane has a 10% climb gradient. By how much will it clear a 900m high obstacle situated 9740m from the end of the Take-off Distance Available (TODA)?

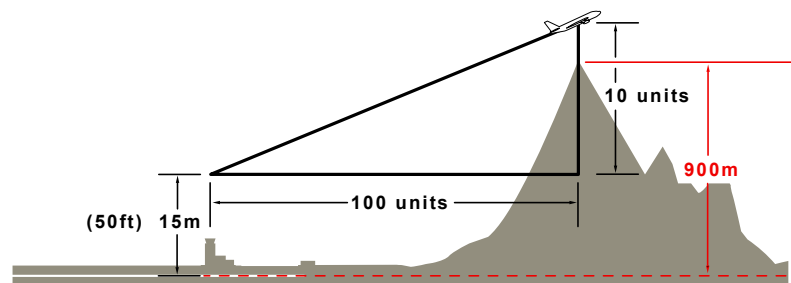


Figure 3.41

In order to find out by how much the aeroplane will clear the obstacle, it is necessary to calculate the height gain after covering a horizontal distance of 9740m.

Remember: Percentage gradient is merely the vertical height for a horizontal distance travelled of 100 units. In this case the 10% gradient will give 10 units up for every 100 units along.

The primary data from the question has been included in Figure 3.41. This simple procedure allows you to see how the aircraft flight path relates to the obstacle. The height of the obstacle is above Reference Zero, as is the start of the climb segment.

For practical purposes a screen height of 50ft is 15m.

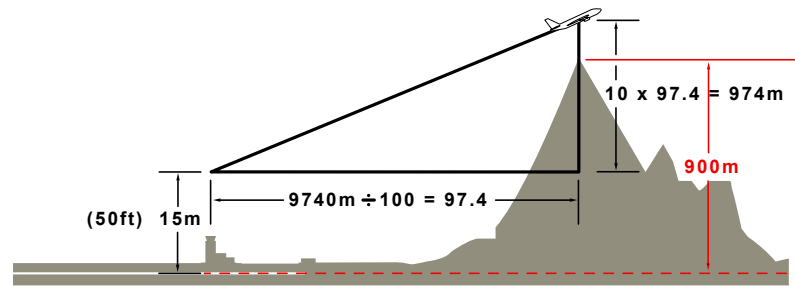


Figure 3.42

The distance of the obstacle from the end of the TODA is 9740 m, so we need to discover how many times the horizontal ratio of 100 will divide into that distance ($9740 / 100 = 97.4$). This means that the horizontal distance is 97.4 times greater, so the height gain will also be 97.4 times greater. Multiplying 10 by 97.4 will give the height gain in metres, ($97.4 \times 10 = 974\text{m}$) in this case, 974 m.

However, it must be remembered that the climb segment starts at 15 m (50 ft) above Reference Zero. So the screen height must be added to the height gain ($974 \text{ m} + 15 \text{ m} = 989 \text{ m}$), in this example, 989 m

The aircraft will clear the 900 metre obstacle by 89 metres.

RATE OF CLIMB

We will now consider rate of climb and begin with an overview. There are many ways of learning. But once a concept has been explained and understood it must then be remembered. Some students manage to confuse angle of climb with rate of climb, so the following basic explanation is provided to help decide when and how to use rate of climb. (The same considerations can be used later with rate of descent).

POWER is the RATE of doing work. (Associate the word RATE with the word POWER).

$$\text{Work} = \text{Force} \times \text{Distance}$$

Therefore:

$$\text{POWER} = \frac{\text{Force} \times \text{Distance}}{\text{Time}}$$

When considering rate of climb we need to do the maximum amount of work on the aeroplane in a given time.

Question: When climbing, what Force must be balanced?

Answer: Drag!

The remaining product from the formula is distance divided by time, e.g. nautical miles per hour (kt).

Question: How many speeds are there?

Answer: One! The True Air Speed, the only speed there is, the speed of the aeroplane through the air.

Therefore:

$$\text{POWER REQUIRED} = \text{DRAG} \times \text{TAS}$$

If we take a Thrust Required (Drag) curve in sea level ISA conditions, and multiply the Drag at various airspeeds by the TAS and plot the resulting Power Required curve on the same piece of graph paper, the result will be that illustrated in Figure 3.43.

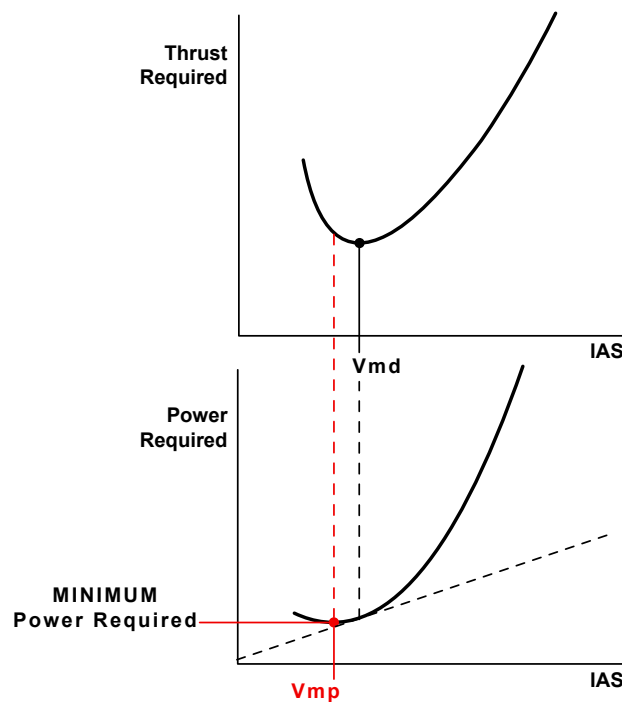


Figure 3.43

The shape of the Power Required curve is very similar to that of Thrust Required. The significant difference is that the Power Required curve is displaced to the left. Consequently, the speed for minimum Power Required (V_{MP}) is slower than the speed for minimum Thrust Required (V_{MD}).

It is essential to be able to visualise the Power Required curve relative to the Thrust Required curve, together with the V_{mp} and V_{md} relationship. Associated data will be presented later.

To demonstrate one use of the ($\text{POWER REQUIRED} = \text{DRAG} \times \text{TAS}$) formula; if an aircraft climbs at a constant IAS, Drag remains constant, but TAS must be increased to compensate for decreasing air density. Therefore, when climbing at a constant IAS, Power Required increases.

Rate of climb is the vertical speed of an aeroplane measured in feet per minute; displayed in the cockpit on the vertical speed indicator (VSI).

Another way to think of rate of climb is to consider it as the TAS of the aeroplane along a gradient.

Figure 3.44 shows two identical aeroplanes at the same angle of climb. The one on the right has a higher TAS along the gradient. In the same time, the aeroplane on the right will climb through a greater vertical distance than the aeroplane on the left. Therefore the aeroplane on the right has a higher rate of climb. This demonstrates that TAS is one important factor when considering rate of climb.



Figure 3.44

Figure 3.45 shows two identical aeroplanes at the same TAS. The aeroplane on the right is climbing at a steeper angle. In the same time, the aeroplane on the right climbs through a greater vertical distance than the aeroplane on the left. Therefore the aeroplane on the right has a higher rate of climb. This demonstrates that angle of climb is also an important factor in the rate of climb.

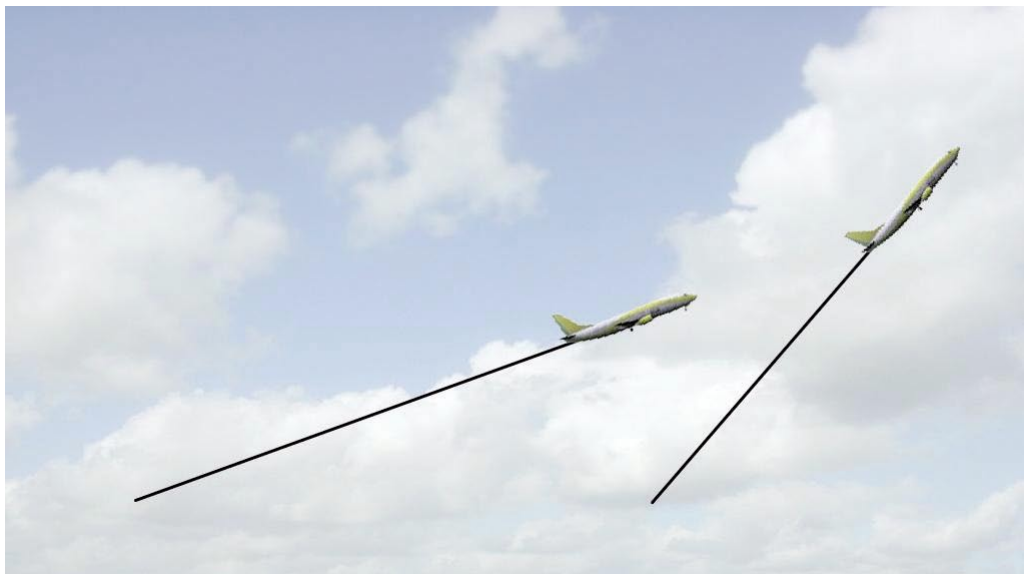


Figure 3.45

From Figure 3.44 and 3.45 and the above explanation, it can be seen that rate of climb is a function of both angle of climb and TAS along the achieved gradient.

SAMPLE QUESTION

An aircraft with a gradient of 3.3% is flying at an IAS of 85kt. At a Pressure Altitude of 8,500ft and an outside air temperature 15°C, the aircraft will have a ROC of:

- a. 284 ft/min.
- b. 623 ft/min.
- c. 1,117 ft/min.
- d. 334 ft/min.

As Power Required is Drag x TAS, the IAS must be converted into TAS at the pressure altitude of 8,500ft and an OAT of 15 degrees C. Using a circular slide rule the TAS is 100 KTAS.

Note: At climb angles less than approximately 20 degrees (and they always will be) the difference in length between the hypotenuse and the adjacent sides of a right angled triangle is so small that, for the sake of simplicity, it is disregarded in this type of calculation. So we do not need to worry about the fact that the aeroplane TAS is 'up' the hypotenuse. (The JAA make the same assumption, so your answers will be correct)

From our previous study of climb angle/gradient it is self evident that use of percentage gradient allows us to visualise the ratio of 'up' to 'along'. In this case the climb gradient of 3.3% gives a horizontal component of 100 and a vertical component of 3.3. Because we are considering RATE of climb, the horizontal component is the TAS, which in this case is 100 KTAS; this must be converted into ft/min:-

$$\frac{100 \text{ KTAS} \times 6080 \text{ ft}}{60 \text{ mins}} = 10133 \text{ ft/min}$$

$$\frac{10133 \text{ ft/min}}{100} = 101.33$$

$$101.33 \times 3.3 = 334 \text{ ft/min}$$

Let us return to the formula for the gradient of climb as shown below

$$\text{Gradient} = \frac{(T - D)}{W}$$

Gradient is given by the formula thrust available minus thrust required divided by weight. All that it is needed now for consideration of Rate of Climb is to add the velocity function, as shown below. This is now the formula for Rate of Climb.

$$\text{Rate of Climb} = \frac{(T - D)}{W} \times \text{TAS}$$

However, there is a little more detail to understand:-

The velocity is True Air Speed, but Thrust and Drag are both forces and TAS is distance over time. Force multiplied by distance gives work and work divided by time gives power. This means that instead of thrust multiplied by velocity, the formula now contains the expression Power Available, and instead of thrust required multiplied by velocity, the formula now has Power Required.

$$\text{Rate of Climb} = \frac{\text{(Excess power Available)}}{\text{Power Available} - \text{Power Required}} \times W$$

The Rate of Climb formula now reads power available minus power required (excess power), divided by weight.

For any given weight, the greater the excess power available, the greater the rate of climb. Conversely, the less the excess power available, the smaller the rate of climb. In order to maximise the aeroplane's rate of climb therefore, we need to maximise excess power. To understand how it is possible to obtain the greatest amount of excess power available and therefore climb at the highest rate of climb it is necessary to look at some more graphs.

EXCESS POWER AVAILABLE (JET)

Figure 3.46 shows a graph of power available and power required for a typical jet aeroplane. In order to provide some benchmarks it is necessary to locate the three reference speeds V_{MP} , V_{MD} and $1.32 V_{MD}$ that we mentioned earlier. The speed found at the bottom of the power required curve is called the velocity for minimum power or V_{MP} . There was another speed, slightly faster than V_{MP} called V_{MD} . This speed is the velocity for minimum drag and is found at the tangent to the power required curve.

Lastly the highest of the performance reference speeds is $1.32 V_{MD}$ which is located a point beyond V_{MD} . Having analysed the reference speeds, the object now is to locate where excess power available is maximum.

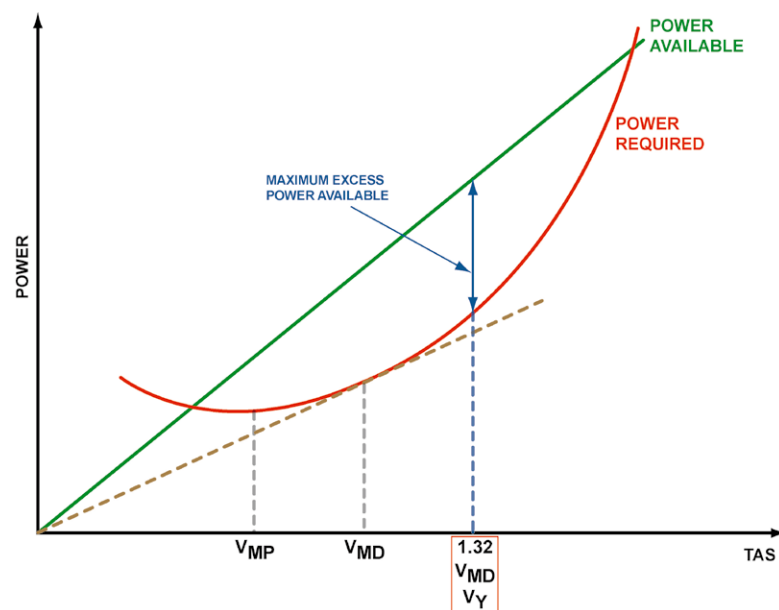


Figure 3.46 Maximum excess power available occurs at $1.32 V_{MD}$ for jet aeroplanes

Looking at the graph, the area between the two curves represents the area of excess power available. On the graph the greatest amount of excess power available will be found where the distance between the curves is at maximum. Notice that it occurs at $1.32 V_{MD}$. At any other speed, the excess power is less and the rate of climb will be less. The speed for the best rate of climb is called V_Y . Therefore for a jet aeroplane V_Y occurs at $1.32 V_{MD}$. V_Y is the airspeed to use to climb to the cruise or en-route altitude as it will give the greatest height gain per unit time. In a typical 737-400 this speed is about 275 knots and is usually published in the aeroplane flight manual as an indicated airspeed.

EXCESS POWER AVAILABLE (PROPELLER)

Figure 3.47 is a graph of power available and power required for a typical propeller aeroplane. On the graph, the greatest amount of excess power available will be found where the distance between the curves is at maximum.

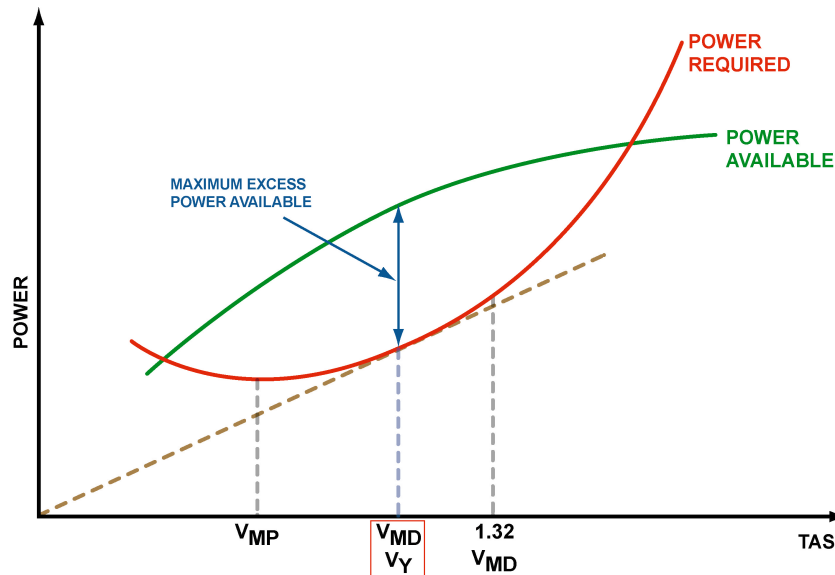


Figure 3.47 Maximum excess power available occurs at V_{MD} for propeller aeroplanes

Notice that for a propeller aeroplane this occurs at V_{MD} . At any other speed, the excess power is less and the rate of climb less. As we have already learnt, V_Y is the speed for the best rate of climb. Therefore for a propeller aeroplane, V_Y occurs at V_{MD} .

It is important to remember where V_Y is found for both jet and propeller aeroplanes. For example, looking at the Figure 3.47, it can be seen that if a propeller aeroplane were climbing at a speed equal to V_{MP} and then selected a slightly higher speed, the excess power would increase and the rate of climb would increase. It is more obvious to see how speed changes affect both excess power and the rate of climb when the graph is used. Try and become aware of what the graphs look like so that you can use them to your advantage in test situations. Let us now examine what factors can influence the rate of climb for jet or propeller aeroplanes.

FACTORS AFFECTING RATE OF CLIMB**WEIGHT**

You may recall that an increase in weight creates more weight apparent drag which reduces the angle of climb. For any given airspeed, if the angle of climb reduces, then so will the rate of climb because they are fundamentally linked. You can see this effect on the formula shown below. Simply by increasing the value of weight, mathematically the rate of climb will reduce.

$$\text{Rate of Climb} = \frac{\text{Power Available} - \text{Power Required}}{W}$$

Weight has a further effect that we have already talked about. An increase in weight will require an increase in lift. Increasing lift increases induced drag which causes the drag curve to move up and right. The power required curve, shown in red in the graph below, is actually based upon drag. Power required is drag multiplied by velocity.

So if the drag curve moves up and right, so will the power required curve.

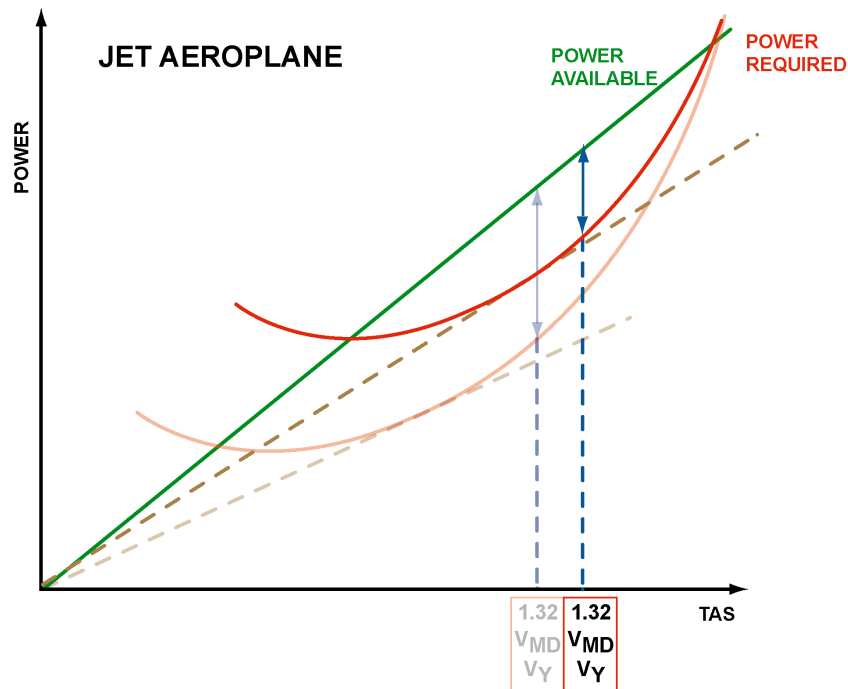


Figure 3.48 The effect of higher weight is to move the power required curve up and right, reducing excess thrust and increasing V_y

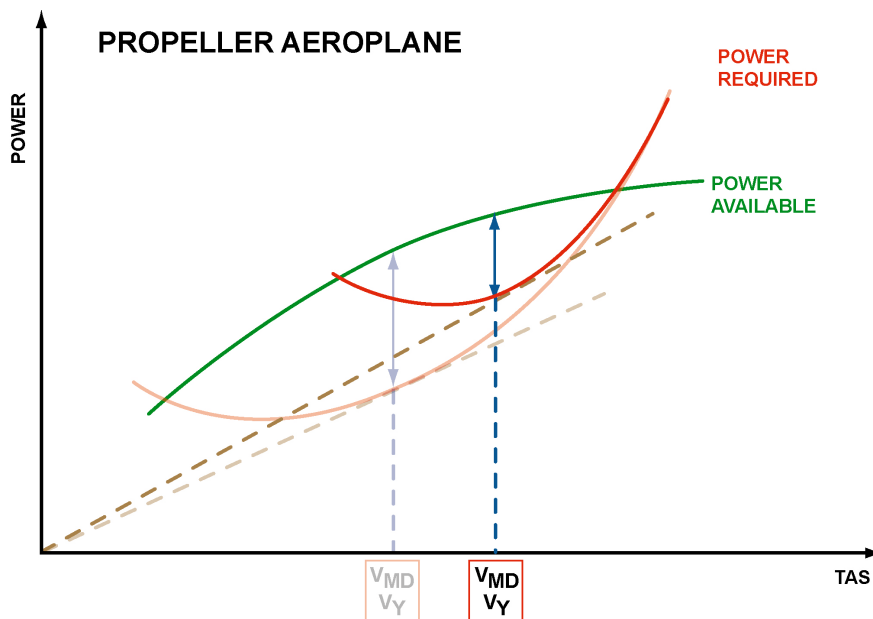


Figure 3.49 The effect of higher weight is to move the power required curve up and right, reducing excess thrust and increasing V_y

As you can see from Figure 3.48 for jet aeroplane and Figure 3.49 for propeller aeroplanes the power required curve moves up and right. Therefore less excess power is available and therefore the rate of climb decreases. However, what is important to see is that the speed for maximum excess power available is no longer the same. It is now higher. So with higher weight, the rate of climb is decreased but V_Y is increased.

CONFIGURATION

The next factor that affects the rate of climb is the configuration of the aircraft, in other words the use flaps and undercarriage.

If the undercarriage and flaps are deployed then the profile drag of the aeroplane will increase. This increases total drag and the drag curve moves upwards and to the left. The power required curves will follow the same movement as the drag curve.

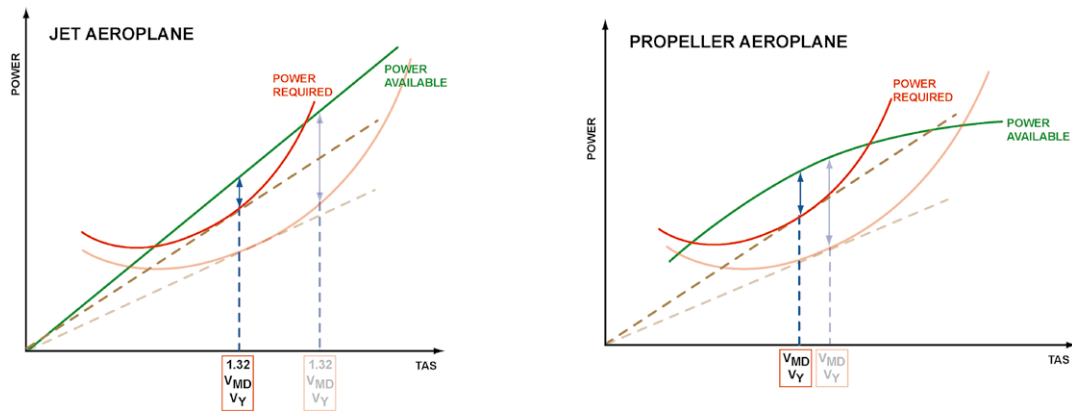


Figure 3.50 The effect of extending the gear or flaps is to move the power required curve up and left, reducing excess thrust and decreasing V_Y

Notice the reduction in excess power available as shown by the blue double headed arrows. You may recall that a reduction in excess power reduces your rate of climb.

However, the important effect here is that the speed for maximum excess power is no longer the same. It is now lower. So with the undercarriage and or flaps deployed, the rate of climb is decreased and V_Y is decreased. If you use flaps for take off, remove them in stages when you have attained a positive stable climb ensuring you check through the aeroplane flight manual for the correct actions for your aeroplane.

As you do so, the rate of climb and the speed to attain the best rate of climb will increase, so you should accelerate to ensure you remain at V_Y .

DENSITY

Density is another important factor that affects the rate of climb. However, density affects a lot of the variables in the formula for the rate of climb.

Shown below is an expanded rate of climb formula, reminding you that power available is thrust multiplied by true airspeed and that power required is Drag multiplied by true airspeed.

$$\text{Rate of Climb} = \frac{\text{Power Available (Thrust} \times \text{TAS)} - \text{Power Required (Drag} \times \text{TAS)}}{W}$$

Focusing on the power available for the moment, decreased density will decrease the thrust but it will also increase the true airspeed. The overall effect is that the thrust loss is more than the TAS gain, meaning, overall, that the power available decreases.

Looking at power required, decreased density will increase the true airspeed but have no effect on the drag. Therefore the power required will increase.

Looking at Figure 3.51 and using the graphs for the Jet and Propeller aeroplane you can see that the power available curve move down and right, and the power required curve move up and right. You will notice that there is less excess power available and this causes a reduction in the rate of climb for both aeroplane types.

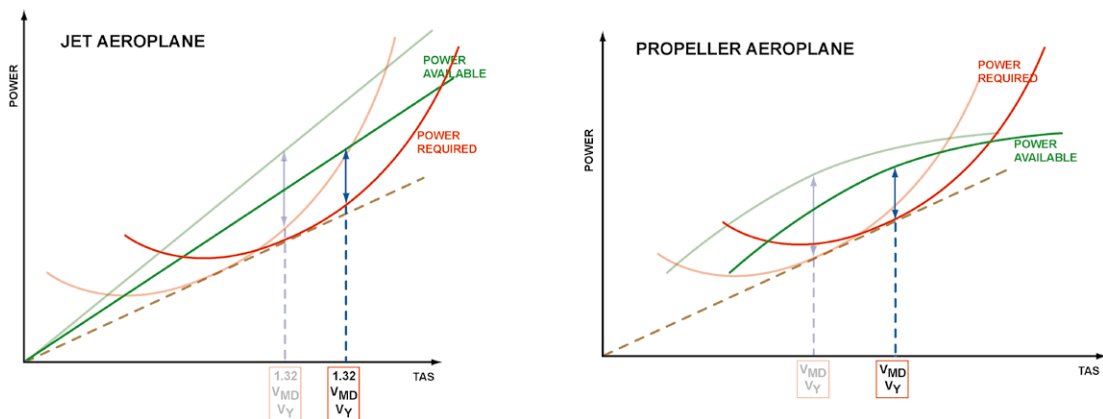


Figure 3.51 Decreasing density (high temperature/high altitudes/high humidity) reduces excess power available and increases V_Y (TAS)

Notice from the graph that the true airspeed for V_Y increases a little with decreasing density or increasing altitude. However, as pilots we fly using indicated airspeeds and therefore it is important to understand what happens to the indicated airspeed of V_Y . In order that we may understand a further explanation is needed.

Using Figure 3.52 you'll notice that if the true airspeed increases only slightly with altitude, then the indicated airspeed will still fall. Therefore, although V_Y as TAS increases with decreasing density or increasing altitude, V_Y as an IAS decreases. In fact, V_Y will eventually fall to become the same value as V_X . So in summary, reduced density decreases the indicated airspeed of V_Y and decreases the rate of climb.

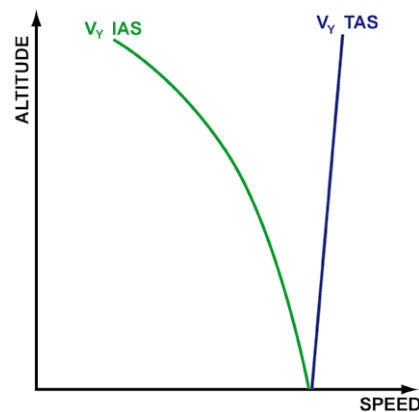


Figure 3.52 If the TAS of V_Y increases a little with reducing density or increasing altitude the IAS of V_Y still falls

In relation to altitude, the higher the aeroplane flies, the excess power available diminishes and therefore the maximum achievable rate of climb will decrease.

There will be an altitude where the excess power available decreases to zero, as shown in Figure 3.53. Therefore the rate of climb will also decrease to zero. This altitude is known as the absolute ceiling.

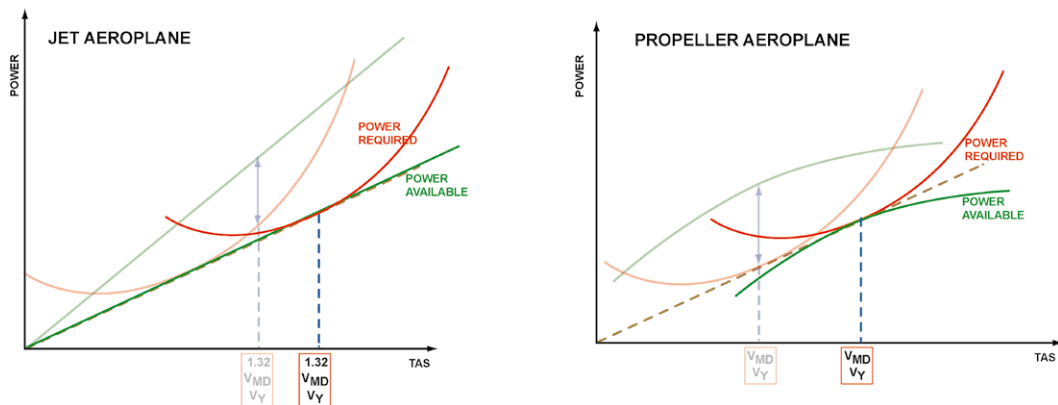


Figure 3.53 At a certain altitude or density, there is no more excess power available and therefore the rate of climb is zero

Figure 3.52 shows the excess of power for a typical aeroplane at various altitudes. Notice V_Y is the speed that gives the maximum excess power available and maximum achievable rate of climb. This is shown by the top of each curve. Also note that on this graph, V_X can be found at the tangent point of each curve. As altitude increases, notice that the excess power available, achievable rate of climb and the indicated airspeed for V_Y decreases. Eventually there will be an altitude where V_X and V_Y are the same and there is no more excess power and therefore, the rate of climb is zero. Remember that this altitude is called the Absolute Ceiling.

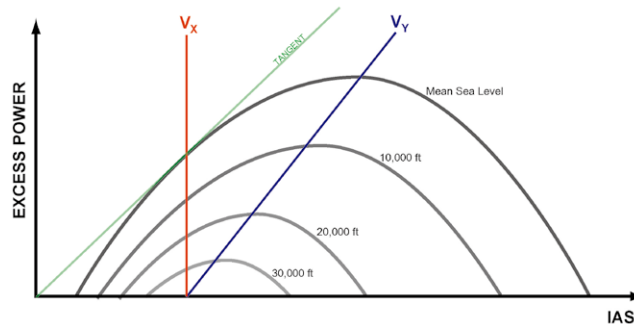


Figure 3.54 As altitude increases, the excess thrust reduces and V_Y as an IAS decreases to become the same speed as V_X at the absolute ceiling

At its absolute ceiling, the performance of an aeroplane is so reduced that it is unable to manoeuvre. Therefore, absolute ceiling is a rather abstract concept for a pilot. It is more useful for a pilot to know his aeroplane's service ceiling. Service ceiling is defined by the manufacturer's and aviation authorities as the maximum altitude where the best rate of climb airspeed will still produce a positive rate of climb at a specific number of feet per minute. The recommendation is to not exceed this altitude because the performance envelope of the aeroplane is very small. If the aeroplane were to climb higher, the rate of climb would fall to zero, the aeroplane will not be able to climb any higher and the absolute ceiling would be reached. At this altitude V_Y and

V_x are the same speed. To find the absolute and service ceilings of your aeroplane, consult your flight manual and operate the aeroplane below the service ceiling to help maintain sufficient performance levels.

WIND

Wind is generally considered as horizontal movement of air. It cannot oppose or add to the vertical forces on the aeroplane. As such, wind has no effect on the rate of climb and therefore has no effect on the time to climb. However, vertical wind currents such as the ones found in microbursts or vertical windshear do affect the rate of climb of the aeroplane.

DESCENT

This lesson on descent performance will focus mainly on the forces in the descent and what factors govern the descent. In a normal flight, the descent will occur at a point we define as “the top of descent” which may be up to 200 miles before the destination aerodrome. A descent will also be required following engine failure or depressurisation. In this latter situation the descent is forced early and it is important for the pilot to be aware of what determines the characteristics of the descent so that obstacle clearance can be maintained. There are two ways of measuring the descent performance of an aircraft. Either by angle of descent, sometimes called descent range, or rate of descent, sometimes called descent endurance.

ANGLE OF DESCENT

In order to initiate a steady descent, thrust is normally reduced. The rearward force of drag exceeds the forward force of thrust and the aircraft slows down. The value of drag that exceeds the thrust force is called excess drag. In order to balance the forces and maintain speed, the nose is lowered until the weight apparent thrust provides enough forward force to balance the excess of drag as can be seen in Figure 3.55. Now the aircraft will maintain this steady descent angle at a constant speed. The forward and rearward forces are in balance once again. Drag (D_A) is being balanced by the thrust (T) and the weight apparent thrust ($W \sin \gamma$).

$$D_A = T + W \sin \gamma$$

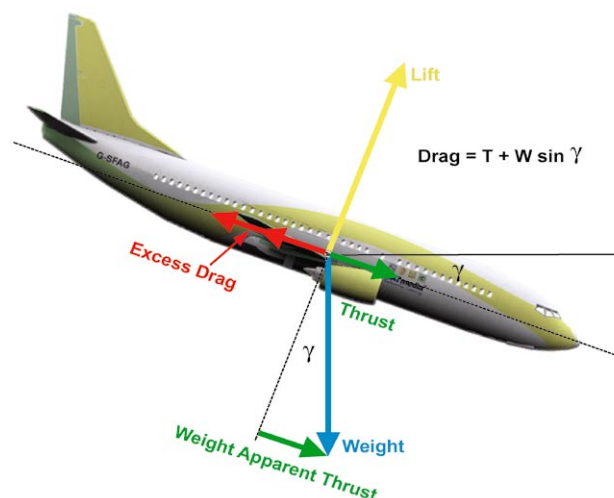


Figure 3.55 An illustration showing the balances of forces in normal powered descent

The weight apparent thrust can be calculated by multiplying weight by the sine of the angle gamma. If thrust were reduced even more as shown in Figure 3.56, then there would be a greater amount of excess drag. More weight apparent thrust is therefore needed to balance the greater amount of excess drag. To gain more weight apparent thrust the aeroplane nose must be lowered even more. The result is an increase in the descent angle. For the purpose of the examinations, lowering the nose is a decrease in pitch.

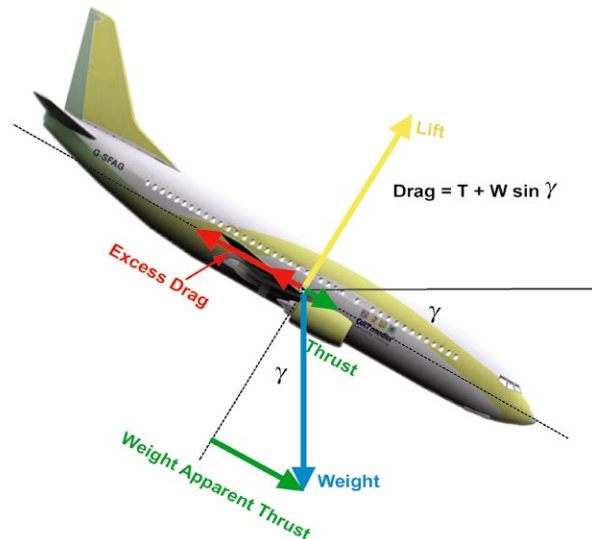


Figure 3.56 An illustration showing the balances of forces in low powered descent.

From this demonstration it is clear that it is the excess drag which determines the angle of descent. Notice that the angle gamma is the same angle as the angle of descent.

Re-arranging the formula shown in Figure 3.55 and 3.56 ($D_A = T + W \sin \gamma$) so that angle gamma can be calculated gives us the formula for the angle or gradient of descent.

$$\text{Gradient of Descent}(\%) = \frac{D - T}{W} \times 100$$

Drag minus Thrust will give Excess drag. In summary then, the angle or gradient of descent is controlled by the excess drag. In order to visualise this excess drag, it is necessary to return to the thrust and drag graphs that were used in the climbing lesson.

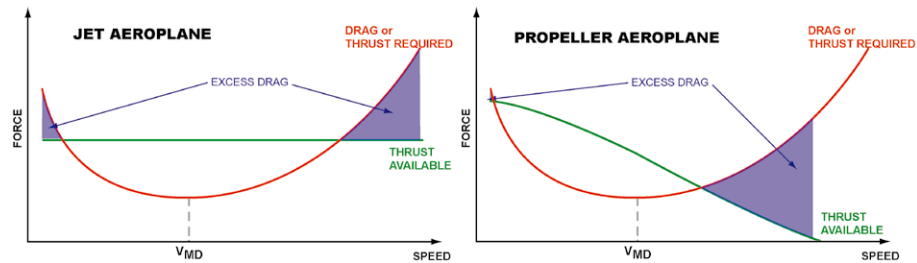


Figure 3.57 An illustration showing excess drag ($D - T$) for a jet and propeller aeroplane

Shown in Figure 3.57 are the thrust and drag curves for a jet and propeller aeroplane. We have learnt that in order to descend, there has to be an excess of drag. On the graphs, excess drag can be found by taking the area beneath the drag curve and subtracting from it the area beneath the thrust curve. The solid blue highlighted areas represent excess drag. Notice that if thrust is reduced at any given speed, then excess drag increases, therefore the descent angle increases.

MAXIMUM ANGLE OF DESCENT

If it were a performance priority to maximise the angle of descent, then from the theory we have seen so far, we would have to maximise excess drag.

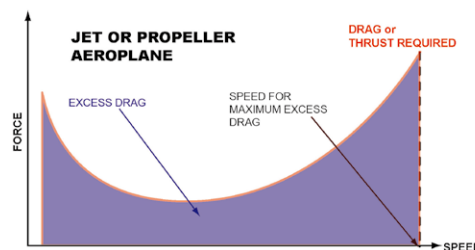


Figure 3.58 An illustration showing excess drag ($D - T$) for a jet and propeller aeroplane with zero thrust

If thrust is reduced to zero, notice that the excess drag area is a maximum, but to obtain the maximum excess drag, the aeroplane needs to be accelerated to a very high speed, as shown in Figure 3.56. This can be achieved by closing the throttles, and continuously lowering the nose of the aeroplane so as to cause the increasing amount of weight apparent thrust to accelerate the aeroplane. As speed rises even more, both the excess drag and the angle of descent will increase. The angle of descent then is a function of excess drag, the greater the excess drag the steeper the angle of descent. This angle can be increased even more if it were possible to increase the excess drag. This can be achieved by deploying drag devices such as the speed brakes and the undercarriage, but attention must be paid to their maximum deployment speeds. The practical side of increasing drag to increase your descent angle occurs mainly in training and occasionally in commercial operations after air traffic re-routes. Take note that any increase in excess drag either by deploying flaps or undercarriage, or by reducing thrust will steepen the angle of descent.

MINIMUM ANGLE OF DESCENT

You have just learnt that to maximise the descent angle excess drag must be maximised. Following an engine failure the aim is to ensure that the aeroplane will cover the greatest horizontal distance so that the pilot has a large area in which to select a suitable landing field. This can only be achieved by using the flattest possible angle of descent sometimes referred to as the minimum glide angle. To descent at the shallowest possible angle, then excess drag must be minimum. This can be seen in Figure 3.59.

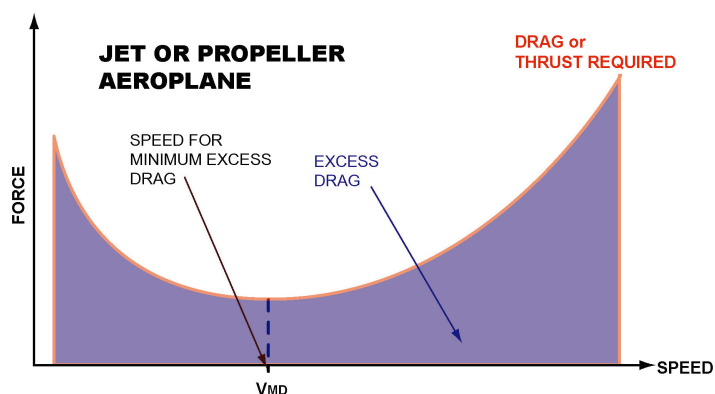


Figure 3.59 An illustration showing that excess drag ($D - T$) is minimum at V_{MD} for a jet and propeller aeroplane with zero thrust

Notice that V_{MD} is the speed found at the bottom of the drag curve. At V_{MD} , drag is at a minimum. Therefore, to descent at the minimum possible angle, the aeroplane must be flown at V_{MD} since, with no power, V_{MD} is the speed that gives minimum excess drag.

One of the other ways to examine glide performance is to consider the aeroplanes lift over drag ratio commonly referred to as the lift drag ratio. However, before we do this, there is a little more detail to discuss first. In the glide descent the resultant of drag and lift balances the force of weight. From your Principles of Flight lessons, the term for the resultant of lift and drag is Total Reaction. If the drag force line is moved upwards you can see that we now have a triangle of forces with the angle gamma being the angle between the lift and total reaction.

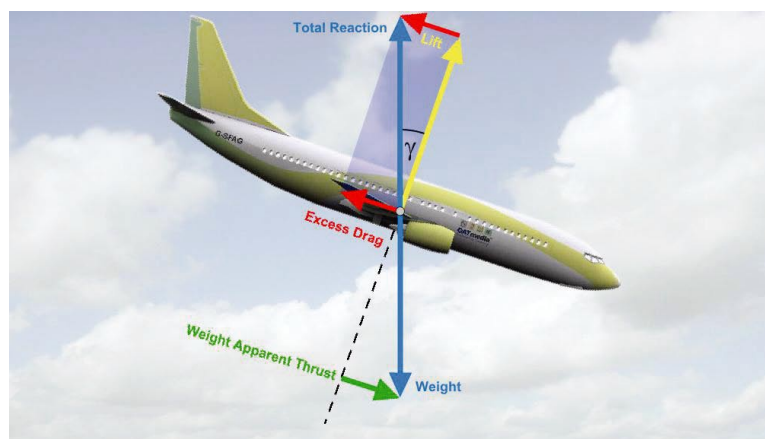


Figure 3.60 The value of drag (in red) and the value of lift (in yellow) determine the angle gamma, which is also the same as the angle as the angle of descent.

Looking at Figure 3.60 if there were any change in the lift and or drag values, both the angle gamma and the glide angle would change. A typical modern jet has a maximum lift drag ratio of about 19. Where this ratio reaches its maximum, the value the angle gamma will be at minimum. The lift drag ratio reaches its maximum value at 4 degrees angle of attack and is always at the speed V_{MD} . Therefore, V_{MD} is the speed for the minimum angle of descent or the minimum glide angle. V_{MD} is also known as the speed for L/D Max or L/D Min. The angle of attack at V_{MD} is fixed at 4 degrees. If the angle of attack is greater or less than 4 degrees, the speed will change, the lift drag ratio will decrease in value and consequently the angle of the glide will increase.

If, following an engine failure, you fly at V_{MD} , your aeroplane will be flying at the flattest possible glide angle. Never try to stretch the glide by raising the nose of the aeroplane. If you do so, the speed will decrease and the glide angle will steepen. At any speed other than V_{MD} your glide angle will be steeper than the optimal glide angle. Shown in Figure 3.61 is the angle of glide at V_{MD} .

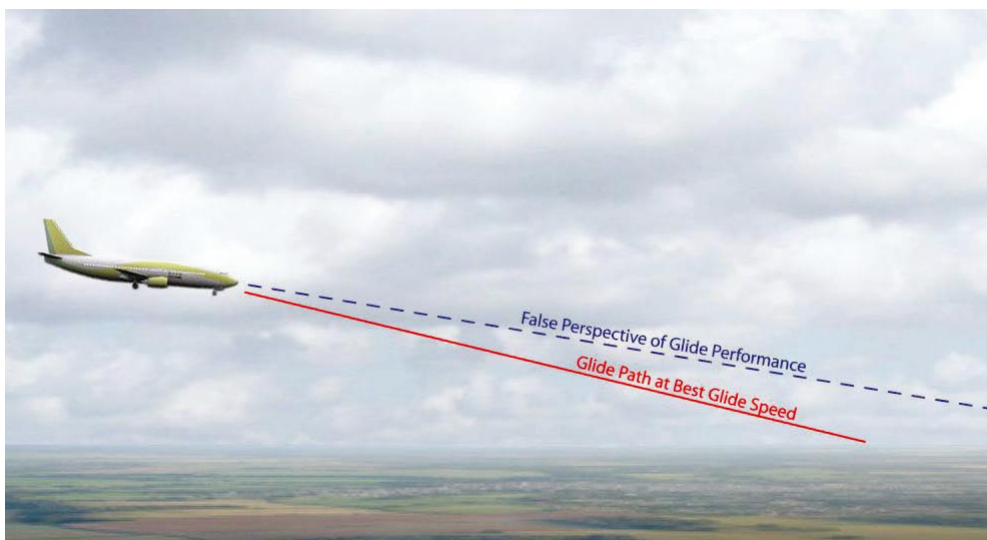


Figure 3.61 When flying at V_{MD} , if the nose is raised the aeroplane will slow down and therefore not be at V_{MD} anymore. The angle of descent will therefore steepen.

The temptation is to raise the nose a little. This gives an impression from the cockpit that the glide is being extended. If the nose were raised, the weight apparent thrust would decrease and the aeroplane would slow down. As a result the aeroplane would not be flying at V_{MD} and therefore not have the best lift drag ratio. The result would be a steeper descent angle despite the fact that the aeroplane had a slightly higher nose attitude. Be disciplined in following the procedures for flying at the optimum glide angle as laid down by the manufactures or the operator in the Aeroplane Flight Manual.

RATE OF DESCENT

You may recall we mentioned at the beginning of the descent section that there were two ways of assessing the descent performance. We have covered the angle of descent or descent range; now let us consider the rate of descent or descent endurance.

You have already learnt in an earlier lesson that the rate of climb was a function of both climb angle and velocity. Similarly, the rate of descent is a function of descent angle and velocity. Shown below is the formula for the rate of descent.

$$\text{Rate of Descent} = \frac{DV - TV}{W}$$

You may recall that force and velocity gave us Power. So the correct formula for the rate of descent is the shown below.

$$\text{Rate of Descent} = \frac{\text{(Excess power Required)}}{W} = \frac{\text{Power Required} - \text{Power Available}}{W}$$

The rate of descent is equal to the power required minus the power available divided by the weight. Power required minus power available gives excess power required. So, for any given weight, the rate of descent is determined by the excess power required.

The greater the excess power required, the larger the achievable rate of descent, conversely the lesser the excess power required the smaller will be the rate of descent.

In an emergency descent, for instance a descent initiated by the pilot following depressurisation, the aim is to reach FL 100 as soon as possible. To achieve this requirement, the aeroplane would need to lose height with the maximum possible rate of descent which can only happen if the aeroplane has maximum excess power required. Shown in Figure 3.62 is the power required and power available curves for both the jet and propeller aeroplane. The areas beneath the power required curves but above the power available curves represent the excess power required and are highlighted in light blue. However, notice that is not a lot of excess power required. It is possible to create even more.

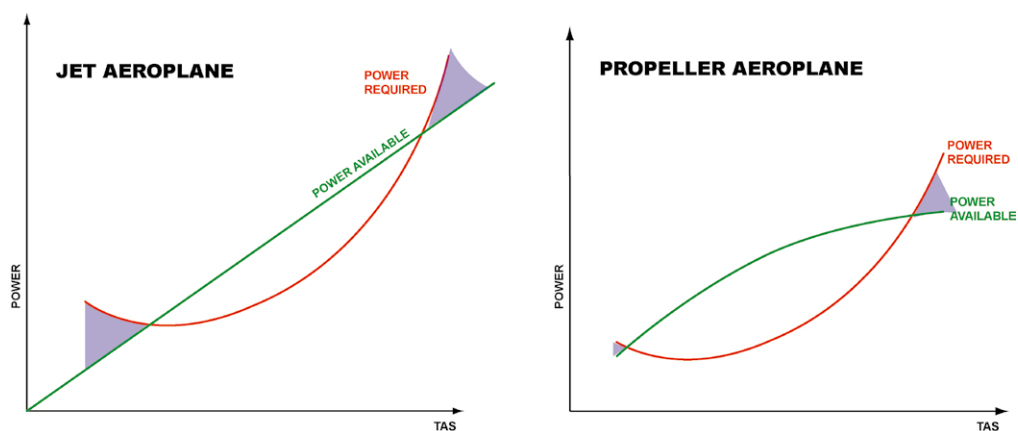


Figure 3.62 The area beneath the power required line but above the power available line represents the area for excess power required. This is shown by the blue faded areas.

In order to create the conditions of the greatest excess of power required, power available (represented by the green line in the diagram) must be reduced to nil as shown by Figure 3.61

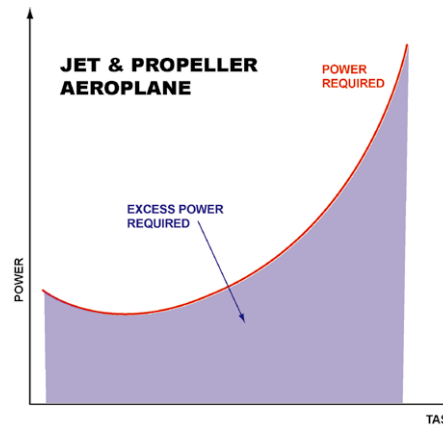


Figure 3.63 With no power available since the throttle is closed, all of the area beneath the power required curve becomes excess power required

Notice that now, the blue areas of excess power required, are now as large as possible. In order to achieve the greatest rate of descent the aeroplane needs to fly at a speed that achieves the greatest excess power required. It is obvious from the graph that this can only be achieved at very high speeds. Remember that power required is a function of speed and drag, therefore the aeroplane needs to be configured for high drag and high speed in order to achieve maximum power required. In fact, for a lot of Class A aeroplanes, emergency descents are flown at maximum operating speeds with air brakes or speed brakes deployed and thrust at idle.

If it were the aim to descend at the lowest rate of descent, the aeroplane would need to fly at a speed that gives the minimum excess power required. Looking at Figure 3.63 this point is plain to see. In fact it is found at the very bottom of the power required curve. You may recall that this speed is called V_{MP} . So, to lose height at the slowest possible rate of descent the aeroplane would need to fly at V_{MP} . The lowest rate of descent is also known as maximum descent endurance, which essentially means the aeroplane will take the greatest time to descend. The JAA sometimes refer to this as the speed for maximum glide endurance.

FACTORS AFFECTING DESCENT

WEIGHT

For the effect of weight on the descent we shall only consider the effect in a glide, in other words with idle power. Let us firstly concentrate on the minimum angle of descent or the glide angle.

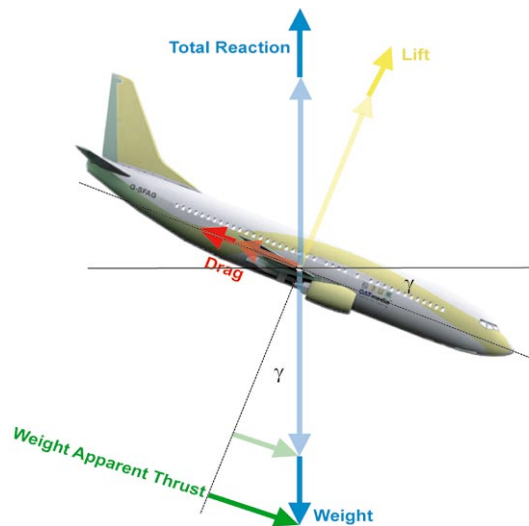


Figure 3.64 An illustration showing that with a higher weight the forward and rearward forces along the flight path are larger but the angle of glide remains unchanged

Looking at Figure 3.64 you can see that an aeroplane with a higher weight will have a larger amount of weight apparent thrust, but if the aeroplane is still flying at V_{MDV} (which will be faster with a higher weight) it will also have a greater amount of drag. You will recall this from knowing that a higher weight moves the drag curve up and right. In Figure 3.64 you'll notice that the forward and rearward forces along the flight path are still balanced, albeit a bit longer. But crucially notice that the angle of descent is unchanged. It is important for you to understand that weight has no effect on the minimum angle of descent or glide angle but it will increase the speed of the descent.

In summary therefore, weight has no effect on the minimum angle of descent, but it will increase the speed along that descent gradient and therefore it will increase the rate of descent.

CONFIGURATION

Similarly with the effect of weight, configuration changes are best understood when assuming idle thrust. The next factor to affect the angle and rate of descent is the aeroplane's configuration. Looking at Figure 3.65, if the flaps or undercarriage were deployed, then notice that excess drag increases. To balance this increase in excess drag, the nose is lowered. This action increases weight apparent thrust and a balance of forces is restored but, importantly the balance is achieved at a higher angle of descent and therefore a higher rate of descent.

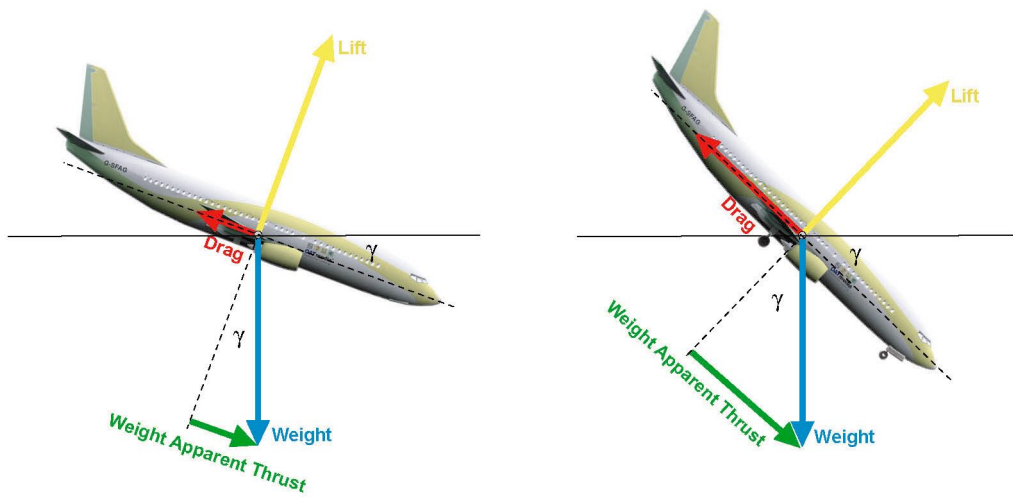


Figure 3.65 An illustration showing an increase in excess drag must be balanced by an increase in weight apparent thrust.

The effect of configuration can also be seen using graphs. Shown below in Figure 3.66 is the drag curve for the jet and propeller aeroplane with excess drag shown by the light blue area. With flaps and undercarriage deployed, you will recall that the curves move up and left. This has the effect of increasing the excess drag and therefore increasing the angle of descent for any given speed. Notice too, that the speed for the minimum angle of descent, V_{MD} , is lower.

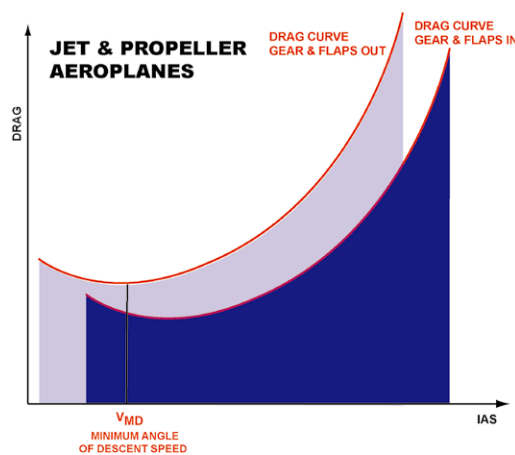


Figure 3.66 With undercarriage and flap deployed, the drag curve moves up and left showing an increase in excess drag and consequently an increase in glide angle.

The same effect can be seen in Figure 3.67 when examining the rate of descent and by using the power required graph. Similarly the blue area represents excess power required.

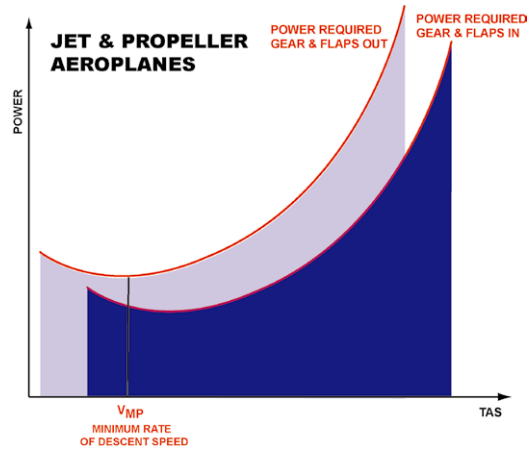


Figure 3.67 With undercarriage and flap deployed, the power required curve moves up and left showing an increase in excess power required and consequently an increase in the rate of descent.

With flaps and undercarriage deployed, you will recall that the power curves move up and left. This has the effect of increasing the excess power required and therefore increasing the rate of descent. Notice too, that the speed for the minimum rate of descent, V_{MP} is lower.

In summary then, with gear and flaps deployed the angle and rate of descent increase, but the speeds for minimum angle and minimum rate of descent decrease.

WIND

The last factor to affect the angle and rate of descent is wind. Figure 3.68 shows the effect of headwinds and tailwinds on the angle and rate of descent. Headwinds steepen the glide angle and decrease the descent range whereas tailwinds decrease the glide angle but increase the descent range. However, notice that the aeroplane in a headwind or tailwind reaches the same descent altitude in the same time as the aeroplane flying in zero wind conditions. This demonstrates that a headwind or tailwind has no effect on the rate of descent.

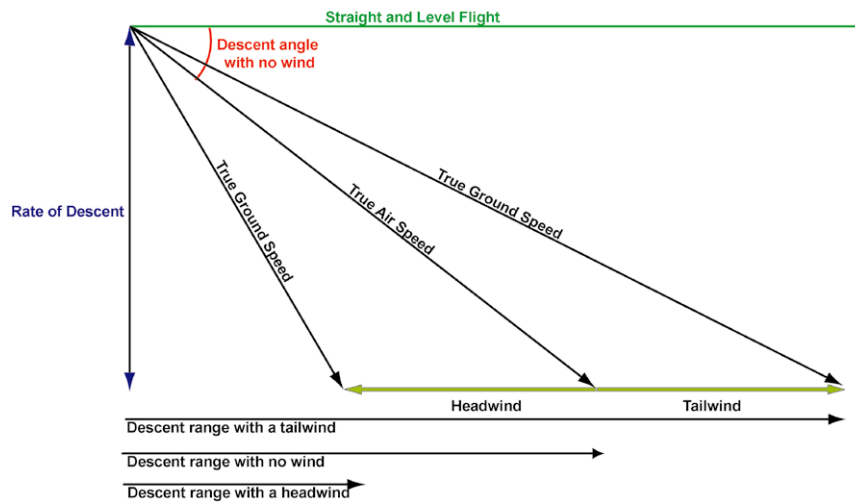


Figure 3.68 An illustration showing the effect of headwinds and tailwinds on the angle and rate of descent.

The effect of the wind on the angle of descent can be examined a little further. Because of the adverse effect of the headwind on descent range, then in a glide, it would be of a benefit to increase the aeroplane's forward speed slightly. This has the effect of reducing the time spent in the head wind. This means that the aeroplane will not be pushed back as much by the wind. Similarly with a tailwind; because a tailwind benefits the glide by increasing the decent range, it would be better to try and stay in this situation for longer. So this time the aeroplane's forward speed can be decreased so that the aeroplane can stay under the tailwind effect for longer and therefore be pushed further forwards.

When flying on a training sortie make sure you know the wind speed and direction both for the surface and aloft. This will help you plan a better descent giving you more accurate circuit patterns. But more importantly, knowledge of what the wind is doing will ensure you obtain maximum descent performance if an engine failure should occur.

CLIMB QUESTIONS

1. What happens to the drag of a jet aeroplane if, during the initial climb after take off, a constant IAS and constant configuration is maintained? (Assume a constant mass..
 - a. The drag decreases.
 - b. The drag increases initially and decreases thereafter.
 - c. The drag remains almost constant.
 - d. The drag increases considerably.

2. The speed for best rate of climb is called?
 - a. VO.
 - b. VY.
 - c. VX.
 - d. V2.

3. An increase in atmospheric pressure has, among other things, the following consequences on take-off performance:
 - a. a reduced take-off distance and degraded initial climb performance.
 - b. a reduced take-off distance and improved initial climb performance.
 - c. an increases take-off distance and degraded initial climb performance.
 - d. an increased take-off distance and improved initial climb performance.

4. A higher outside air temperature:
 - a. does not have any noticeable effect on climb performance.
 - b. reduces the angle of climb but increases the rate of climb.
 - c. reduces the angle and the rate of climb.
 - d. increases the angle of climb but decreases the rate of climb.

5. In un-accelerated climb:
 - a. thrust equals drag plus the uphill component of the gross weight in the flight path direction.
 - b. thrust equals drag plus the downhill component of the gross weight in the flight path direction.
 - c. lift is greater than the gross weight.
 - d. lift equals weight plus the vertical component of the drag.

6. A jet aeroplane is climbing at a constant IAS with maximum climb thrust. How will the climb angle / the pitch angle change?
 - a. Remain constant / decrease.
 - b. Remain constant / become larger.
 - c. Reduce / decrease.
 - d. Reduce / remain constant.

7. Take-off performance data, for the ambient conditions, show the following limitations with flap 10° selected:
- Runway or Field limit mass: 5,270 kg
Obstacle limit mass: 4,630 kg
If the estimated take-off mass is 5,000kg it would be prudent to consider a take-off with flaps at:
- 20° , both limitations are increased.
 - 5° , the obstacle limit mass is increased but the runway limit mass decreases.
 - 5° , both limitations are increased.
 - 20° , the obstacle limit mass is increased but the runway limit mass decreases.
8. A four jet-engined aeroplane whose mass is 150 000 kg is established on climb with engines operating. The lift over drag ratio is 14:1. Each engine has a thrust of 75 000 Newtons. The gradient of climb is: (given: $g = 10 \text{ m/s}^2$.)
- 12.86%
 - 27%
 - 7.86%
 - 92%
9. How does the best angle of climb and best rate of climb vary with increasing altitude?
- Both decrease.
 - Both increase.
 - Best angle of climb increases while best rate of climb decreases.
 - Best angle of climb decreases while best rate of climb increases.
10. Following a take-off determined by the 50 ft (15m) screen height, a light twin climbs on a 10% ground gradient. It will clear a 900 m high obstacle situated at 10,000 m from the 50 ft clearing point with an obstacle clearance of:
- 85 m
 - It will not clear the obstacle
 - 115 m
 - 100 m
11. The rate of climb:
- is approximately the climb gradient multiplied by the true airspeed divided by 100.
 - is the downhill component of the true airspeed.
 - is angle of climb multiplied by the true airspeed.
 - is the horizontal component of the true airspeed.
12. Assuming that the required lift exists, which forces determine an aeroplane's angle of climb?
- Thrust and drag only.
 - Weight and thrust only.
 - Weight, drag and thrust.
 - Weight and drag only.

13. Which of the following provides maximum obstacle clearance during climb?
- 1.2Vs.
 - The speed for maximum rate of climb.
 - The speed, at which the flaps may be selected one position further UP.
 - The speed for maximum climb angle V_x .
14. Which speed provides maximum obstacle clearance during climb?
- The speed for which the ratio between rate of climb and forward speed is maximum.
 - $V_2 + 10$ kt.
 - The speed for maximum rate of climb.
 - V_2 .
15. Which of the equations below expresses approximately the unaccelerated percentage climb gradient for small climb angles?
- Climb Gradient = $((\text{Thrust} - \text{Drag}) / \text{Weight}) \times 100$
 - Climb Gradient = $((\text{Thrust} + \text{Drag}) / \text{Lift}) \times 100$
 - Climb Gradient = $((\text{Thrust} - \text{Mass}) / \text{Lift}) \times 100$
 - Climb Gradient = $(\text{Lift} / \text{Weight}) \times 100$
16. The absolute ceiling:
- is the altitude at which the best climb gradient attainable is 5%.
 - is the altitude at which the aeroplane reaches a maximum rate of climb of 100 ft/min.
 - is the altitude at which the rate of climb is theoretically zero.
 - can be reached only with minimum steady flight speed.
17. The climb gradient of an aircraft after take-off is 6% in standard atmosphere, no wind, at 0 ft pressure altitude.
Using the following corrections:
- $\pm 0.2\%$ / 1 000 ft field elevation
 - $\pm 0.1\%$ / $^{\circ}\text{C}$ from standard temperature
 - 1% with wing anti-ice
 - 0.5% with engine anti-ice
- The climb gradient after take-off from an airport situated at 1 000 ft, 17°C ; QNH 1013.25 hPa, with wing and engine anti-ice operating for a functional check is:
- 3.9%
 - 4.3%
 - 4.7%
 - 4.9%
18. As long as an aeroplane is in a positive climb:
- V_X is always below V_Y .
 - V_X is sometimes below and sometimes above V_Y depending on altitude.
 - V_X is always above V_Y .
 - V_Y is always above V_{MO} .

19. A constant headwind component:
- increases the angle of flight path during climb.
 - increases the best rate of climb.
 - decreases the angle of climb.
 - increases the maximum endurance.
20. A higher gross mass at the same altitude will cause:
- VY and VX to decrease.
 - VX to increase and VY to decrease.
 - VY and VX to remain constant since they are not affected by a higher gross mass.
 - VY and VX to increase.
21. With an true airspeed of 194 kt and a vertical speed of 1,000 ft/min, the climb gradient is approximately:
- 3°
 - 3%
 - 5°
 - 8%
22. With take-off flaps set, Vx and Vy will be:
- lower than that for clean configuration.
 - higher than that for clean configuration.
 - same as that for clean configuration.
 - changed so that Vx increases and Vy decreases compared to clean configuration.
23. The maximum rate of climb that can be maintained at the absolute ceiling is:
- 0 ft/min
 - 125 ft/min
 - 500 ft/min
 - 100 ft/min
24. A head wind will:
- increase the rate of climb.
 - shorten the time of climb.
 - increase the climb flight path angle.
 - increase the angle of climb
25. VX is:
- the speed for best rate of climb.
 - the speed for best specific range.
 - the speed for best angle of flight path.
 - the speed for best angle of climb.

26. The best rate of climb at a constant gross mass:
- decreases with increasing altitude since the thrust available decreases due to the lower air density.
 - increases with increasing altitude since the drag decreases due to the lower air density.
 - increases with increasing altitude due to the higher true airspeed.
 - is independent of altitude.
27. With a jet aeroplane, the maximum climb angle can be flown at approximately:
- 1.2 V_s .
 - 1.1 V_s .
 - The highest L/C ratio.
 - The highest L/D² ratio.
28. During a climb with all engines operating, the altitude where the rate of climb reduces to 100 ft/min is called:
- Thrust ceiling.
 - Maximum transfer ceiling.
 - Service ceiling.
 - Absolute ceiling.
29. With all other factors remaining constant, how does increasing altitude affect V_x and V_y as a TAS:
- V_x will decrease and V_y will increase.
 - Both will increase.
 - Both will remain the same.
 - Both will decrease.
30. Any acceleration in climb, with a constant power setting:
- improves the climb gradient if the airspeed is below V_X .
 - improves the rate of climb if the airspeed is below V_Y .
 - decreases rate of climb and increases angle of climb.
 - decreases the rate of climb and the angle of climb.
31. For an aircraft maintaining 100 kt true airspeed and a climb gradient of 3.3% with no wind, what would be the approximate rate of climb?
- 3.30 m/s
 - 33.0 m/s
 - 330 ft/min
 - 3,300 ft/min
32. During a climb to the cruising level, any headwind component:
- decreases the climb time.
 - decreases the ground distance flown during that climb.
 - increases the amount of fuel for the climb.
 - increases the climb time.

33. The pilot of a single engine aircraft has established the climb performance. The carriage of an additional passenger will cause the climb performance to be:
- Degraded
 - Improved
 - Unchanged
 - Unchanged, if a short field take-off is adopted.
34. A headwind component increasing with altitude, as compared to zero wind condition: (assuming IAS is constant).
- improves angle and rate of climb.
 - decreases angle and rate of climb.
 - has no effect on rate of climb.
 - does not have any effect on the angle of flight path during climb.
35. Which of the following combinations adversely affects take-off and initial climb performance?
- High temperature and low relative humidity.
 - Low temperature and low relative humidity.
 - High temperature and high relative humidity.
 - Low temperature and high relative humidity.
36. A decrease in atmospheric pressure has, among other things, the following consequences on take-off performance:
- a reduced take-off distance and degraded initial climb performance.
 - an increased take-off distance and degraded initial climb performance.
 - a reduced take-off distance and improved initial climb performance.
 - an increased take-off distance and improved initial climb performance.
37. The angle of climb with flaps extended, compared to that with flaps retracted, will normally be:
- Increase at moderate flap setting, decrease at large flap setting.
 - Smaller.
 - Larger.
 - Not change.
38. What is the effect of tail wind on the time to climb to a given altitude?
- The time to climb increases.
 - The time to climb decreases.
 - The effect on time to climb will depend on the aeroplane type.
 - The time to climb does not change.
39. Changing the take-off flap setting from flap 15° to flap 5° will normally result in:
- a longer take-off distance and a better climb.
 - a shorter take-off distance and an equal climb.
 - a better climb and an equal take-off distance.
 - a shorter take-off distance and a better climb.

40. What is the influence of the mass on maximum rate of climb (ROC. speed if all other parameters remain constant?
- The ROC is affected by the mass, but not the ROC speed.
 - The ROC and the ROC speed are independent of the mass.
 - The ROC speed increases with increasing mass.
 - The ROC speed decreases with increasing mass.
41. Following a take-off to the 50 ft (15 m. screen height, a light twin climbs on a gradient of 5%. It will clear a 160 m obstacle situated at 5,000 m from the 50 ft point with an obstacle clearance margin of:
- it will not clear the obstacle.
 - 105 m
 - 90 m
 - 75 m
42. The climb “gradient” is defined as the ratio of:
- true airspeed to rate of climb.
 - rate of climb to true airspeed.
 - the increase of altitude to horizontal air distance expressed as a percentage.
 - the horizontal air distance over the increase of altitude expressed as a percentage.
43. When flying an aircraft at:
- V_x without flap
 - V_x with flap
 - V_y without flap
 - V_y with flap
- the aircraft should be achieving:
- The best rate of climb.
 - The best rate of climb, but using- a slightly faster speed than in (i).
 - The best angle of climb.
 - The best angle of climb, but using a slightly faster speed than in (iii).
 - A good angle of climb.
 - The best angle of climb.
 - A good rate of climb.
 - The best rate of climb.
 - The best angle of climb.
 - A slightly reduced angle of climb compared to (i) if using a slightly reduced speed than in (i).
 - The best rate of climb.
 - A slightly reduced rate of climb compared to (iii) if using a slightly reduced speed than in (iii).
 - A good rate of climb.
 - The best rate of climb.
 - A good angle of climb.
 - The best angle of climb.

DESCENT QUESTIONS

1. Two identical aeroplanes at different masses are descending at idle thrust. Which of the following statements correctly describes their descent characteristics?
 - a. At a given angle of attack, both the vertical and the forward speed are greater for the heavier aeroplane.
 - b. There is no difference between the descent characteristics of the two aeroplanes.
 - c. At a given angle of attack the heavier aeroplane will always glide further than the lighter aeroplane.
 - d. At a given angle of attack the lighter aeroplane will always glide further than the heavier aeroplane.

 2. In a steady descending flight equilibrium of forces acting on the aeroplane is given by: ($T =$ Thrust, $D =$ Drag, $W =$ Weight, descent angle = GAMMA)
 - a. $T + D = - W \sin \text{GAMMA}$
 - b. $T + W \sin \text{GAMMA} = D$
 - c. $T - W \sin \text{GAMMA} = D$
 - d. $T - D = W \sin \text{GAMMA}$

 3. Which of the following combinations has an effect on the angle of descent in a glide? (Ignore compressibility effects.)
 - a. Configuration and mass.
 - b. Configuration and angle of attack.
 - c. Mass and altitude.
 - d. Altitude and configuration.

 4. Which statement is correct for a descent without engine thrust at maximum lift to drag ratio speed?
 - a. The mass of an aeroplane does not have any effect on the speed for descent.
 - b. The higher the gross mass the greater is the speed for descent.
 - c. The higher the gross mass the lower is the speed for descent.
 - d. The higher the average temperature (OAT) the lower is the speed for descent.

 5. An aeroplane is in a power off glide at best gliding speed. If the pilot increases pitch attitude the glide distance:
 - a. increases.
 - b. remains the same.
 - c. may increase or decrease depending on the aeroplane.
 - d. decreases.

 6. Is there any difference between the vertical speed versus forward speed curves for two identical aeroplanes having different masses? (assume zero thrust and wind)
 - a. Yes, the difference is that the lighter aeroplane will always glide a greater distance.
 - b. Yes, the difference is that for a given angle of attack both the vertical and forward speeds of the heavier aeroplane will be larger.
 - c. No difference.
 - d. Yes, the difference is that the heavier aeroplane will always glide a greater distance.
-

7. Which statement is correct for a descent without engine thrust at maximum lift to drag ratio speed?
- A tailwind component increases fuel and time to descent.
 - A tailwind component decreases the ground distance.
 - A tailwind component increases the ground distance.
 - A headwind component increases the ground distance.
8. An aeroplane executes a steady glide at the speed for minimum glide angle. If the forward speed is kept constant at V_{MD} , what is the effect of a lower mass on the Rate of descent / Glide angle / CL/CD ratio?
- decreases / constant / decreases
 - increases / increases / constant
 - increases / constant / increases
 - decreases / constant / constant
9. Which of the following factors leads to the maximum flight time of a glide?
- Low mass.
 - High mass.
 - Headwind.
 - Tailwind.
10. A constant headwind:
- increases the descent distance over ground.
 - increases the angle of the descent flight path.
 - increases the angle of descent.
 - increases the rate of descent.
11. An aeroplane carries out a descent maintaining at a constant Mach number in the first part of the descent and then at a constant indicated airspeed in the second part of the descent. How does the angle of descent change in the first and in the second part of the descent? Assume idle thrust and clean configuration and ignore compressibility effects.
- Increases in the first part; is constant in the second.
 - Increases in the first part; decreases in the second.
 - Is constant in the first part; decreases in the second.
 - Decreases in the first part; increases in the second.
12. During a glide at constant Mach number, the pitch angle of the aeroplane will:
- decrease.
 - increase.
 - increase at first and decrease later on.
 - remain constant.
13. Which of the following factors will lead to an increase of ground distance during a glide, while maintaining the appropriate minimum glide angle speed?
- Headwind.
 - Tailwind.
 - Increase of aircraft mass.
 - Decrease of aircraft mass.

14. A twin jet aeroplane is in cruise, with one engine inoperative, and has to overfly a high terrain area. In order to allow the greatest height clearance, the appropriate airspeed must be the airspeed:
- giving the lowest C_d/C_l ratio.
 - for long-range cruise.
 - of greatest lift-to-drag ratio.
 - giving the lowest C_l/C_d ratio.
15. What is the effect of increased mass on the performance of a gliding aeroplane at VMD?
- The lift/drag ratio decreases.
 - The speed for best angle of descent increases.
 - There is no effect.
 - The gliding angle decreases.
16. A twin engined aeroplane in cruise flight with one engine inoperative has to fly over high ground. In order to maintain the highest possible altitude the pilot should choose:
- the speed corresponding to the minimum value of lift / drag ratio.
 - the speed at the maximum lift.
 - the speed corresponding to the maximum value of the lift / drag ratio.
 - the long range speed.
17. With all engines out, a pilot wants to fly for maximum time. Therefore he has to fly the speed corresponding to:
- the minimum power required.
 - the critical Mach number.
 - the minimum angle of descent.
 - the maximum lift.
18. Descending from cruising altitude to ground level at a constant IAS in a headwind, compared to still air conditions, will:
- Reduce the time to descend.
 - Increase the time to descend.
 - Reduce the ground distance taken.
 - Reduce the fuel used in the descent.
19. When descending at a constant Mach number:
- The angle of attack remains constant.
 - The IAS decreases then increases.
 - The pitch angle will increase.
 - The pitch angle will decrease.

ANSWERS

CLIMB

1	C	11	A	21	A	31	C	41	B
2	B	12	C	22	A	32	B	42	C
3	B	13	D	23	A	33	A	43	C
4	C	14	A	24	C	34	C		
5	B	15	A	25	D	35	C		
6	C	16	C	26	A	36	B		
7	B	17	A	27	C	37	B		
8	A	18	A	28	C	38	D		
9	A	19	A	29	B	39	A		
10	C	20	D	30	D	40	C		

DESCENT

1	A	11	A
2	B	12	A
3	B	13	B
4	B	14	C
5	D	15	B
6	B	16	C
7	C	17	A
8	D	18	C
9	A	19	D
10	B		

CHAPTER FOUR
GENERAL PRINCIPLES - CRUISE

Contents

BALANCE OF FORCES IN LEVEL FLIGHT221

MOVING THE CENTRE OF GRAVITY222

AEROPLANE SPEEDS223

INDICATED AIRSPEED (IAS)225

CALIBRATED AIRSPEED (CAS).226

EQUIVALENT AIRSPEED (EAS).226

TRUE AIRSPEED (TAS)226

TRUE GOUNDSPEED (TGS)227

MACH NUMBER228

ENDURANCE230

JET AEROPLANE ENDURANCE231

PROPELLER AEROPLANE ENDURANCE.231

FACTORS AFFECTING ENDURANCE232

RANGE235

FACTORS AFFECTING RANGE.238

OPTIMUM ALTITUDE245

LONG RANGE CRUISE (LRC).249

QUESTIONS251

ANSWERS258

BALANCE OF FORCES IN LEVEL FLIGHT

This chapter will concentrate on the general performance principles of an aeroplane in the en-route phase of flight. Performance in the en route phase can be measured using the aeroplane's range and endurance parameters. These will be discussed in detail later on in the chapter. Let us firstly examine the forces acting on an aircraft in the cruise.

These forces are split into couples and are shown in Figure 4.1.

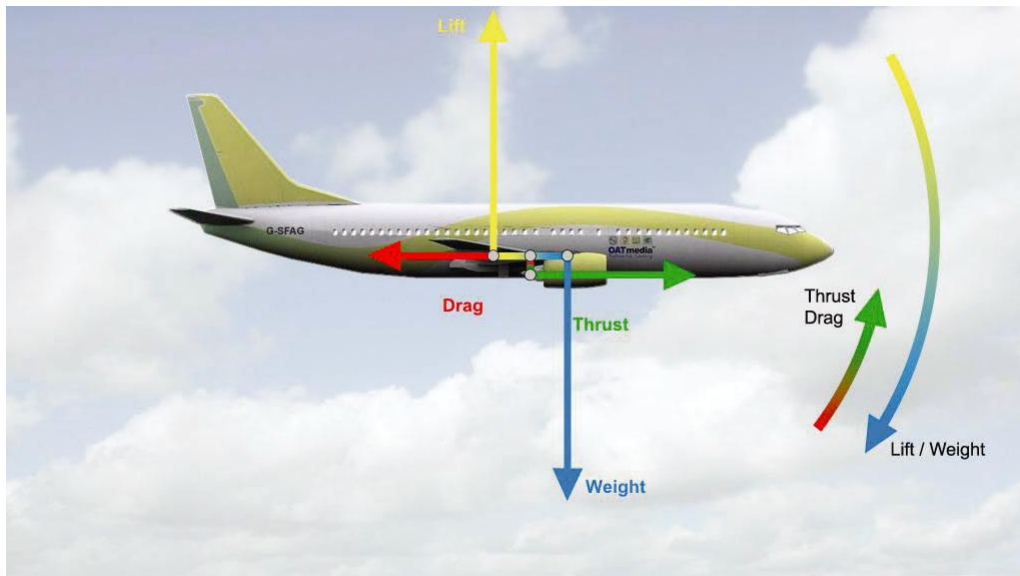


Figure 4.1 An illustration showing some of the forces in straight and level flight

The first of these couples is produced by lift and weight. Weight acts through the centre of gravity of the aeroplane directly towards the centre of the earth. Lift balances weight and acts through the centre of pressure shown here. The effect of this couple on the aeroplane is to cause a nose down pitching moment. The lift weight couple is comparatively strong and thus the nose down pitching moment is large as shown by the large arrow pointing downwards to the right of the aeroplane. As an example of the size of these forces, in a 737-800 series, the maximum structural mass is 79,000 kg. At this mass the aeroplane weighs about 770,000 Newton's. Obviously this weight will be balanced in cruising flight by an equal and opposite lift force of 770,000 Newton's.

The second couple acting upon an aeroplane in flight is that produced by the forces of thrust and drag. The effect of this couple is to cause a nose up pitching moment as shown by upward pointing red and green arrow to the right of the aeroplane. Notice though that this couple is far weaker than the lift weight couple. The maximum thrust produced by the engines of a 737-800 is only 214,000 Newton's. This means that the nose up pitching moment generated by the thrust drag couple does not balance the stronger nose down pitching moment of the lift weight couple. As a result there is still a nose down tendency as shown in Figure 4.1. In order to maintain level flight, we need somehow to generate an opposite moment which will balance the residual nose down pitching tendency. This is achieved by the tailplane, or horizontal stabilizer, on the aeroplane's tail assembly. The horizontal stabiliser, or tailplane must, be set at an angle which will cause a nose up pitching moment to balance the aeroplane, or more commonly expressed, to trim the aeroplane. Looking at Figure 4.2, notice that now, with the addition of the tailplane down force, the nose up and nose down pitching moments are in balance and level flight is possible. The down force generated at the tail is called tail plane down force or tail load.

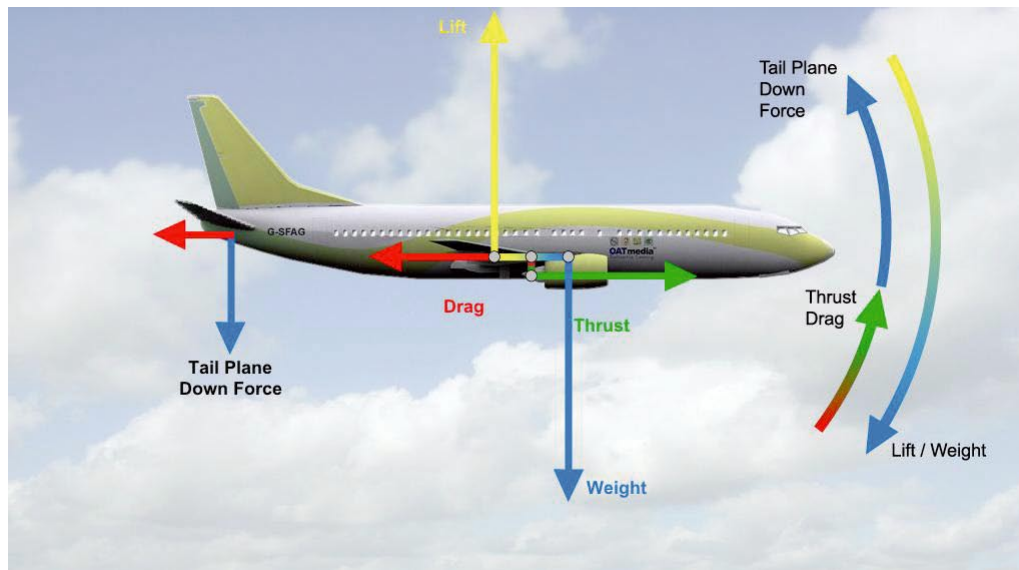


Figure 4.2 An illustration showing the complete balance forces in straight and level flight

Although such a force is necessary for level flight it does have two adverse effects on aircraft performance. Firstly, notice that the tail plane down force acts in the same direction as weight. It therefore increases the effective weight of the aircraft. The second adverse effect of the tailplane down force is its contribution to drag. The tail plane is an aerodynamic surface designed to produce lift. It will therefore produce induced drag as well as parasite drag. Therefore the greater the amount of balancing force produced by the tail plane the greater the aeroplane aerodynamic drag and effective weight. We will shortly understand that the two additional forces provided by the tail plane are detrimental to the aeroplane's en-route performance in terms of range and endurance.

MOVING THE CENTRE OF GRAVITY

To some extent the amount of tail plane down force required for level flight can be manipulated by changing the centre of gravity. In flight this can be done in one of two ways. Firstly by selective fuel consumption, or secondly by fuel transfer. Consuming fuel in the tail first, or transferring fuel out of the tail to other tanks, will move the centre of gravity position forwards. Conversely, using fuel in the centre or forward tanks first, or transferring fuel out of these tanks will cause the centre of gravity to move aft. If the centre of gravity moves forwards, the magnitude of the lift/weight couple increases because the arm of the two forces is now longer. The greater strength from the lift/weight couple increases the nose down pitching moment. This can be seen by comparing the length of the lift/weight pitching down arrows from Figure 4.2 and Figure 4.3.

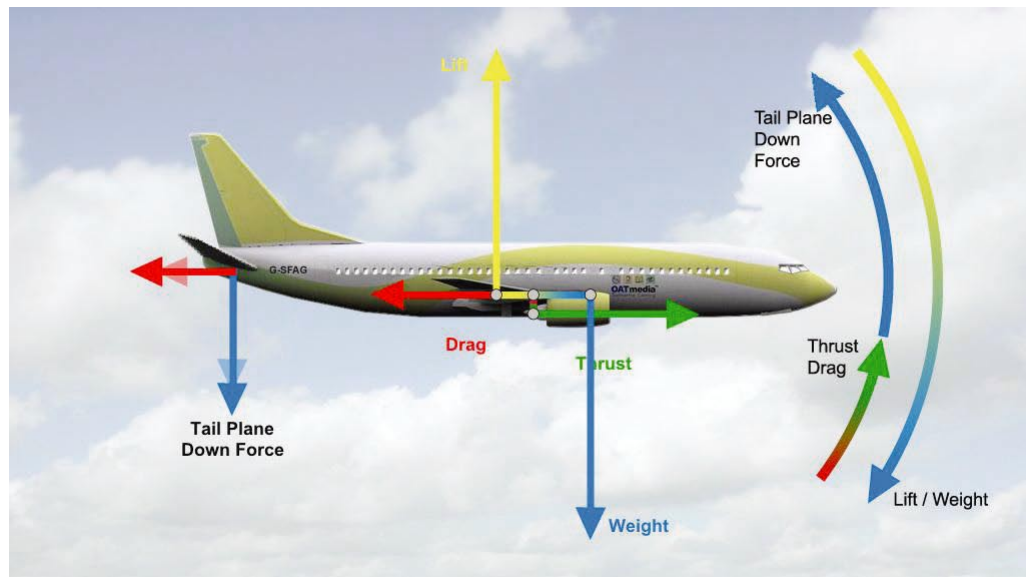


Figure 4.3 An illustration showing that with a more forward C of G the lift weight couple increases and greater tail load is needed

To balance the greater nose down pitching moment and maintain level flight, more tail plane down force is needed. You may recall that this had the effect of increasing the weight and drag of the aeroplane which would have a detrimental effect on the aircraft's performance, reducing both its range and endurance. If the centre of gravity moves aft, the strength of the lift weight couple is decreased because the arm of the two forces is now shorter. This decreases the nose down pitching moment. To balance nose down pitching moment, less tail plane down force is needed to maintain level flight. Reducing tail plane down force reduces drag and effective weight which will increase both the aeroplane's range and endurance capability. Remember that, before you fly, when carrying out a weight and balance check, also ensure that the centre of gravity is still within the limits published in the aircraft manual. Be extra careful when handling data produced by countries whose units of measurement are different to those you are used to.

AEROPLANE SPEEDS

This particular section of the chapter will deal with the aeroplane's speed, including; maximum speed, minimum speed, and the relationship between the various expressions of speed such as indicated airspeed, calibrated airspeed, true airspeed, true ground speed and mach number.

Firstly let us examine what we mean by an aeroplane's maximum speed. You will have learnt from earlier chapters that an aeroplane will remain at a constant speed when the forward and rearward forces are balanced, as shown in Figure 4.4.

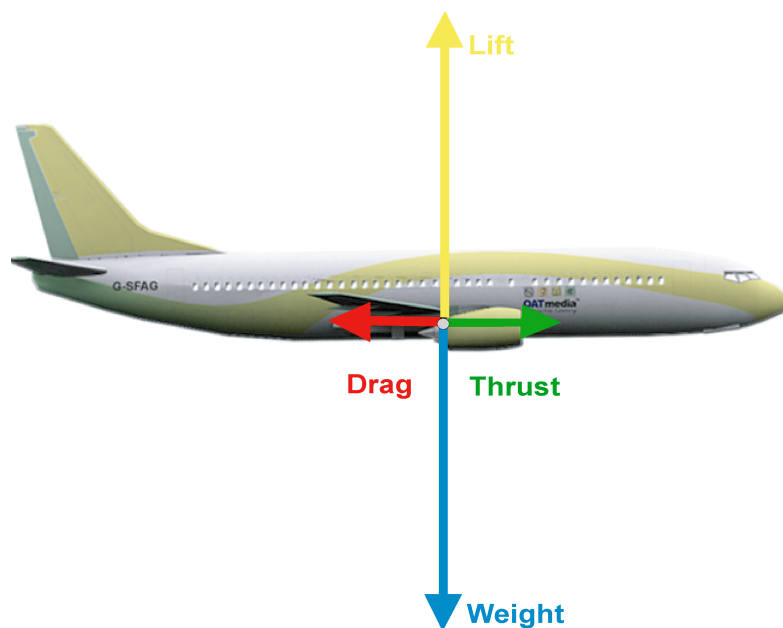


Figure 4.4 In straight and level flight a constant speed is maintained when the forward forces of thrust balances the rearward forces of drag

In this case, thrust is equal to drag. In order for the aeroplane to accelerate thrust must exceed drag. This can be achieved by the pilot opening the throttle further to increase power. With thrust greater than drag the aeroplane will accelerate. As the aeroplane accelerates, drag will increase. When drag reaches a value which is the same as the thrust, then acceleration will cease and the aeroplane will have achieved balanced flight once more, but now at a higher speed. Therefore the highest level flight speed that can be flown by the aeroplane will be at a speed where thrust is maximum and drag is maximum. Let us look at what we have just learnt but this time using the graphs. Shown in Figure 4.5 are the thrust and drag curves for a typical jet aeroplane.

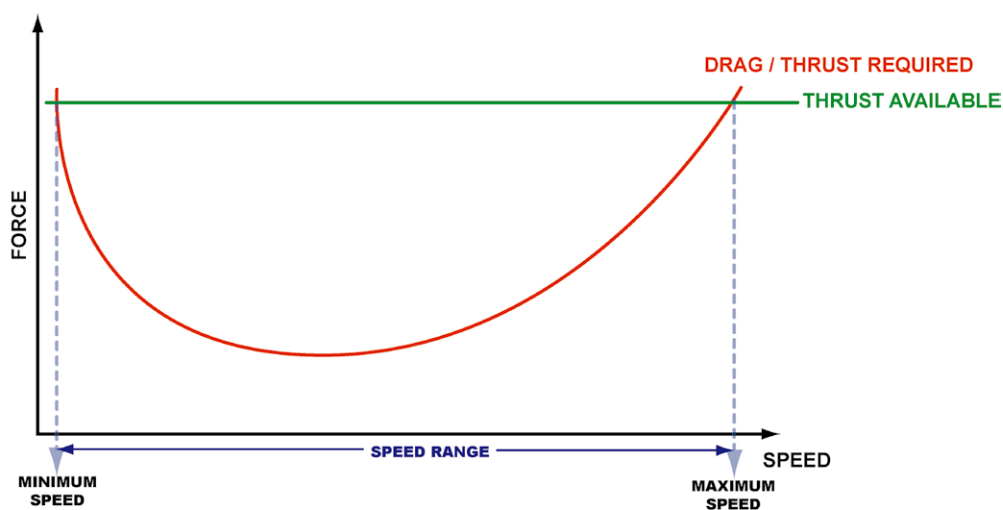


Figure 4.5 An illustration showing that that intersection of the thrust and drag curves represent the maximum and minimum straight and level flight speed

Notice the maximum speed is achieved once thrust and drag are equal. It is impossible in straight and level flight to accelerate any faster since the drag would exceed the thrust. This speed is the fastest speed the aeroplane can achieve in level flight.

Look at the graph again and notice that there is another point on the curves where thrust and drag are equal. This point lies to the very left of the graph. The speed at this point represents the slowest speed that can be maintained. In level flight it would be impossible to fly any slower at this thrust setting since the rearward force of drag would exceed the force of thrust.

At high altitude the thrust produced by the engine decreases and therefore the green thrust line moves downwards.

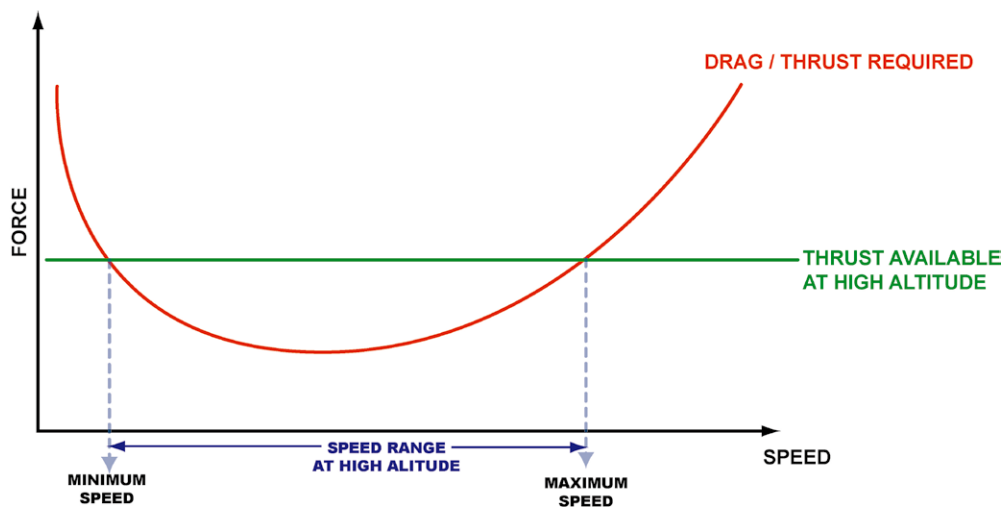


Figure 4.6 An illustration showing that at high altitudes, the level flight speed range decreases.

Looking at Figure 4.6 it is clear to see that at high altitude the maximum achievable level flight speed is slower and the minimum achievable level flight speed is faster than at lower altitudes, thus the range of speeds for the aeroplane is narrower.

This next part of the chapter will focus on the explanation of the various expressions of aeroplane speed.

INDICATED AIRSPEED (IAS)

Different expressions of aeroplane speed are used for different purposes depending on whether we are concerned with aerodynamics, operations, navigation or even performance. In most cases aeroplane speed is measured using certain types of probes called the total pressure and static pressure probes. These probes help us to isolate dynamic pressure on which indicated airspeed is based. You can feel total pressure by simply putting your arm out of the window of a moving car. However, total pressure probes, sometimes called pitot probes and static probes, suffer from errors. Without any correction to the errors, the speed which is obtained from the probes when dynamic pressure is being sensed is called the Indicated airspeed, abbreviated to I A S. Indicated airspeed is the speed that is displayed on the airspeed indicator.

CALIBRATED AIRSPEED (CAS)

If the pressure probes are corrected for instrument and position errors the speed is called Calibrated Airspeed. Abbreviated to CAS. This speed is also known as rectified airspeed, or RAS but this expression will not be used in this book. Calibrated airspeed is more accurate than indicated airspeed. In large modern commercial aeroplanes, the air data computer automatically corrects the pressure probe data for these errors and displays the Calibrated Airspeed in the airspeed indicator rather than the indicated airspeed.

EQUIVALENT AIRSPEED (EAS)

The final correction to make to the information received from the pressure probes is the correction to compensate for the effect of compressibility. Typically, at speeds beyond 220 knots, the air ahead of the aeroplane does not move out of the way. As a result, the air starts to build up and compress in front of the aeroplane. This build up of air has an effect called the compressibility effect. If the probes are corrected for the compressibility error as well as position and instrument errors, the speed obtained is called Equivalent airspeed, abbreviated to EAS. Equivalent airspeed is the most accurate of the speeds which are obtained from dynamic pressure. For the most part, this performance book will assume that indicated airspeed, calibrated airspeed and equivalent airspeed are the same. But, unless otherwise stated, assume any reference to aeroplane speed as being indicated airspeed.

TRUE AIRSPEED (TAS)

The next speed to consider is True Air Speed, abbreviated to TAS. True air speed is the Equivalent airspeed corrected for density error and as the name suggests is the true speed of the aircraft relative to the air through which the aeroplane is flying. Below is a very simplified formula showing that true air speed is proportional to the equivalent airspeed and inversely proportional to the density.

TAS is proportional to $EAS \div \text{DENSITY}$

If for a constant equivalent airspeed the density were to fall, the true air speed would increase. This means that with increasing altitude at a constant equivalent airspeed, true airspeed increases, as shown by Figure 4.7.

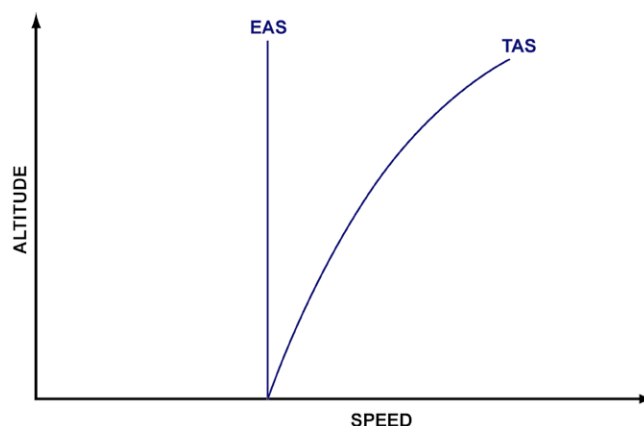


Figure 4.7 An illustration showing the relationship between EAS and TAS with altitude

True airspeed can be calculated by using the tables in the aeroplane flight manual, using a flight navigation computer or even using a calibration scale on the airspeed indicator. True Airspeed is mainly used for navigation and flight planning purposes.

TRUE GROUND SPEED (TGS)

The next speed to consider is the true ground speed, abbreviated to TGS or just GS. This represents the aeroplane's speed within a fixed ground reference system. Put more simply it is the aeroplane's velocity over the ground. The True Ground Speed is equal to the true airspeed plus or minus the wind component. If there is a tailwind then the aeroplane's speed over the ground will increase by a value equal to the speed of the tailwind. For example, if the true airspeed is 250 knots and the tailwind is 20 knots the true ground speed is 270 knots. Conversely, if there is a headwind, the aircraft's speed over the ground will be reduced by a value equal to the speed of the headwind.

For example, if the true airspeed is 250 knots and the headwind is 30 knots the true ground speed is 220 knots. If the head wind or tailwind components are not already known, these can be worked out using a flight navigation computer or by using graphs or tables in the aeroplane flight manual. CAP 698, Section 4, Page 4, Figure 4.1 can also be used.

At speeds higher than about 220 knots, some of the energy of the aeroplane goes into compressing the air ahead of the aeroplane and locally increasing the density of the air. Compressibility affects the amount of drag force on the aeroplane and the effect becomes more important as speed increases. As the aeroplane moves through the air it makes noise simply by disturbing the air. This noise emanates outwards in the form of pressure waves. These pressure waves stream out away from the aircraft at the speed of sound in all directions acting just like the ripples through water when a stone is dropped in the middle of a still pond.



Figure 4.6 An illustration showing pressure waves emanating from a theoretically stationary aeroplane

However, as the aeroplane approaches the speed of sound it actually starts catching up with its own pressure waves in front of it as can be seen in Figure 4.7. These pressure waves turn into one big pressure shock wave which causes a loud bang, called a sonic boom. The shock wave generated actually buffets the aeroplane and decreases the lift force.

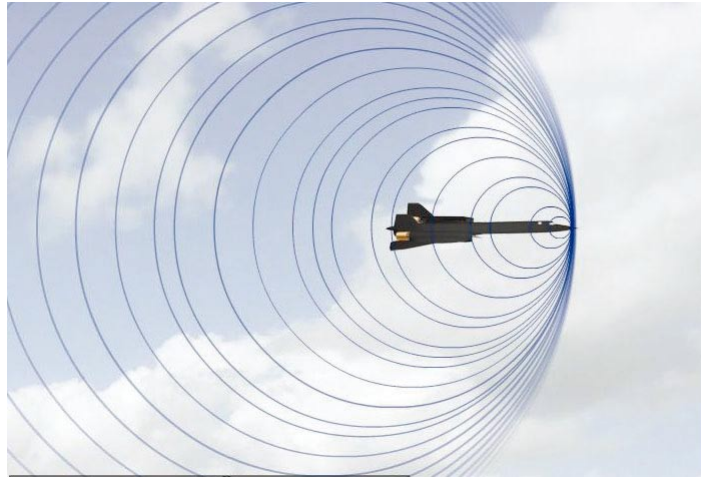


Figure 4.7 An illustration showing pressure waves emanating from an aeroplane flying at the speed of sound

Obviously because of the increasing drag, decreasing lift and aeroplane buffet, pilots need to know when they are approaching the speed of sound.

MACH NUMBER

The ratio of the speed of the aeroplane to the speed of sound in the air determines the magnitude and intensity of many of the effects of high speed flight. Because of the importance of this speed ratio, aerodynamicists have given it a special name called the Mach number in honour of Ernst Mach, a late 19th century physicist who studied gas dynamics. Mach number is not an actual speed as such; it is as we have already said the ratio of the true speed of the aeroplane to the local speed of sound. Mach number is best illustrated using an example. To calculate the Mach number, simply divide the true airspeed (TAS) by the local speed of sound (LSS).

$$\text{MACH NUMBER} = \text{TAS} \div \text{LSS}$$

At sea level in ISA conditions, the local speed of sound is 661 knots. If the true airspeed of the aeroplane is 510 knots, then the Mach number is 0.77. In other words, the aeroplane is travelling at about three quarters of the speed of sound. If the aeroplane were to fly faster, the Mach number would increase. If the aeroplane accelerated to 661 knots, then its speed would be equal to the speed of sound and the aeroplane would be at Mach 1. Aeroplanes flying between 0.8 mach and 1.2 mach are said to be in transonic flight. However, the term super sonic is more commonly known. Super sonic flight describes flight speed above Mach 1.

The speed of sound varies with temperature. As altitude increases, the reducing temperature causes the local speed of sound to fall. At 30,000ft the speed of sound is 590 knots. If the true airspeed of the aeroplane is kept constant at 510 knots, as a result of the falling local speed of sound with altitude, the Mach number will increase.

As the aeroplane's speed approaches Mach 1, the compressibility and approaching shock wave can have very detrimental effects on the aeroplane's performance if the aeroplane is not designed to mitigate such effects. As a result, most commercial aeroplanes in service today have a limit on the maximum Mach number they are allowed to fly at. This maximum operating Mach number is called M_{MO} . Having discussed all the relevant speeds of an aeroplane it is important to understand the relationship of these speeds with one another as altitude changes. This is best illustrated on a graph as shown in Figure 4.8.

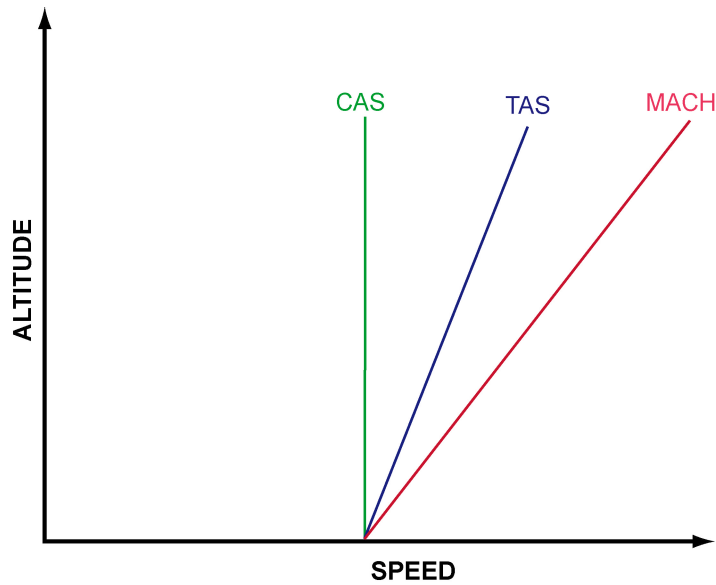


Figure 4.8 An illustration showing the relationship of the various speeds with altitude

If calibrated airspeed, or simply indicated airspeed is kept constant with altitude, then as density falls the true airspeed will increase, as shown in Figure 4.8. But if true airspeed increases with altitude, while the local speed of sound decreases, then the Mach number must increase. These lines representing these three speeds can be manipulated to help solve complex problems.

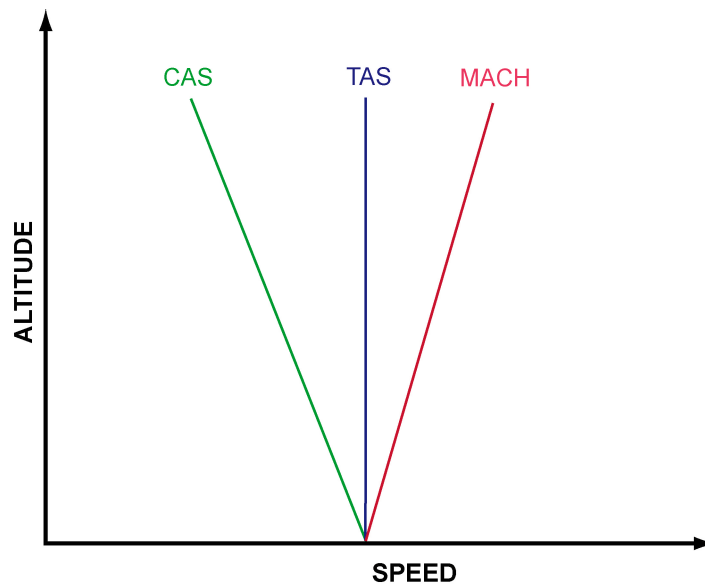


Figure 4.9 An illustration showing the relationship of the various speeds with altitude

If the true airspeed were to be kept constant with altitude as shown in Figure 4.9, the TAS line would be drawn vertically and the CAS and Mach lines as shown. Now, calibrated airspeed decreases whilst Mach number increases.

If Mach number were to be kept constant, the diagram could be drawn so that the mach line is straight up as illustrated in Figure 4.10. Notice that TAS and CAS decrease with increasing altitude.

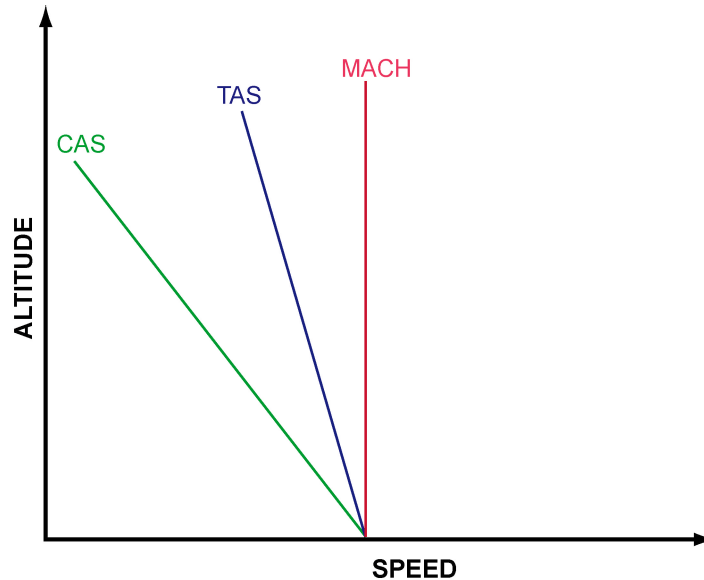


Figure 4.10 An illustration showing the relationship of the various speeds with altitude

These graphs can also be used to see the relationship between the speeds when descending, just ensure to follow the lines down not up. Therefore, looking at Figure 4.10, if the pilot was to descend at a constant Mach number, then the EAS and TAS will increase.

To help you remember how to draw the lines, C, T and M always appear from left to right. You can use Britain's favourite food "Chicken Tikka Masala" as an acronym for remembering C T and M and in the order to which they appear in the graph.

ENDURANCE

The next section of this chapter analyses the two cruise performance parameters; range and endurance. When flying for range we are asking the question - how much fuel will the aeroplane use per unit distance? When flying for endurance we are asking the question - how much fuel does the aeroplane use per unit time? Let us firstly deal with the endurance of the aeroplane.

The endurance of an aeroplane is the time it can remain airborne on a given quantity of fuel or, put another way, endurance can be expressed as fuel used over a given airborne time. The only time an aeroplane will be flown by the pilot for maximum endurance is when the aeroplane is in a holding pattern over its destination. For instance, when there are long landing delays running out of fuel starts to become a problem.

Endurance is defined to be the ratio of airborne time over fuel used for that time.

$$\text{ENDURANCE} = \text{TIME (hr)} \div \text{FUEL (kg)}$$

However, to use this formula a small adjustment needs to be made as shown below.

$$\text{SPECIFIC ENDURANCE (hr/kg)} = 1 \div \text{FUEL FLOW}$$

This now becomes the formula for specific endurance. The units of Specific Endurance are airborne hours per kilogram of fuel consumed. The endurance of an aeroplane is simply a function of its fuel flow or fuel consumption. An aeroplane which can minimise its fuel flow will achieve maximum endurance. Therefore, when analysing the maximum endurance capability of an aeroplane it is necessary to understand what controls the fuel flow. You should note that fuel flow calculations are different for a jet and propeller aeroplane. Let us examine the jet aeroplane first.

JET AEROPLANE ENDURANCE

$$\text{FUEL FLOW} = \text{FUEL FLOW PER UNIT THRUST} \times \text{TOTAL THRUST}$$

Here, fuel flow is a function of the fuel used per unit of thrust, multiplied by the total number of thrust units. Obviously if it were possible to reduce the fuel used per unit of thrust and the total number of thrust units required then the total fuel flow would be reduced. Fuel used per unit thrust is most commonly known as specific fuel consumption which is abbreviated to **SFC**. The formulae for fuel flow should be as shown below

$$\text{FUEL FLOW} = \text{SFC} \times \text{TOTAL THRUST}$$

The specific fuel consumption needs to be small, in other words, the aim is to reduce the amount of fuel used to produce each thrust unit. For a jet engine this occurs when ambient temperature is very low and engine rpm is very high. This can only occur at high altitude. So, flying at high altitude, minimises the fuel used per unit of thrust.

Having minimised the fuel used to produce each unit of thrust, the aim is now to fly the aeroplane using minimum possible total thrust because each unit of thrust requires fuel to be consumed. This problem is comparatively simple to solve. In level flight the forward acting force of thrust is controlled and balanced by the rearward acting force of drag. If drag is small the aeroplane need fly with only a small amount of thrust. Looking at the formula below, thrust can be replaced by drag since the value of drag is equal and opposite to the value of thrust.

$$\text{FUEL FLOW} = \text{SFC} \times \text{TOTAL DRAG}$$

To minimise drag, the jet aeroplane simply flies at the velocity for minimum drag. Therefore V_{MD} is the speed to fly for maximum endurance for a jet aeroplane

In summary then, for a jet aeroplane to maximise its endurance by minimising its fuel flow, the pilot would fly the aeroplane at V_{MD} and fly as high as possible.

PROPELLER AEROPLANE ENDURANCE

The situation with endurance and fuel flow for a propeller aeroplane is very similar to that for the jet aeroplane. There is just one small difference in the formula we use. Turbo-prop and piston engines first convert chemical energy in the fuel into power output on a shaft. The propeller then converts that power into thrust. Therefore, for propeller since the fuel is used to generate power and not thrust the formula for fuel flow is fuel used per unit of power multiplied by the total units of power.

$$\text{FUEL FLOW} = \text{FUEL FLOW PER UNIT POWER} \times \text{TOTAL POWER}$$

Obviously to minimise the fuel flow, the fuel used per unit of power and the total number of power units must be kept to a minimum. Fuel used per unit power as you already know is called specific fuel consumption. Therefore, similarly with a jet the formula for fuel flow for a propeller reads as below.

$$\text{FUEL FLOW} = \text{SFC} \times \text{TOTAL POWER}$$

The specific fuel consumption value needs to be small but for the majority of propeller aeroplanes the value is more or less fixed. However, in very general terms it is safe to say that for piston engines specific fuel consumption is a minimum at lower altitudes, whereas for turbo-propeller engines specific fuel consumption is a minimum at middle to high altitudes. Since specific fuel consumption is more or less fixed, the only other way to minimise fuel flow is to use the minimum amount of power. This can be achieved by flying at the speed for minimum power required, or V_{MP} . Therefore note that, for a propeller aeroplane, it is V_{MP} that is the speed for maximum endurance, whereas for a jet it is V_{MD} .

FACTORS AFFECTING ENDURANCE

WEIGHT

Having studied how to achieve maximum endurance for both jet and propeller engines, let us now examine what factors actually affect endurance. The first factor we must discuss is the effect of weight. You will recall that increasing the weight of the aeroplane increases induced drag and thus moves the total drag curve and power required curves up and right. Looking at Figure 4.11 you can see that for jet aeroplanes at higher weights, the aeroplane has more drag which will require more thrust and therefore require more fuel flow. In this situation the endurance will decrease.

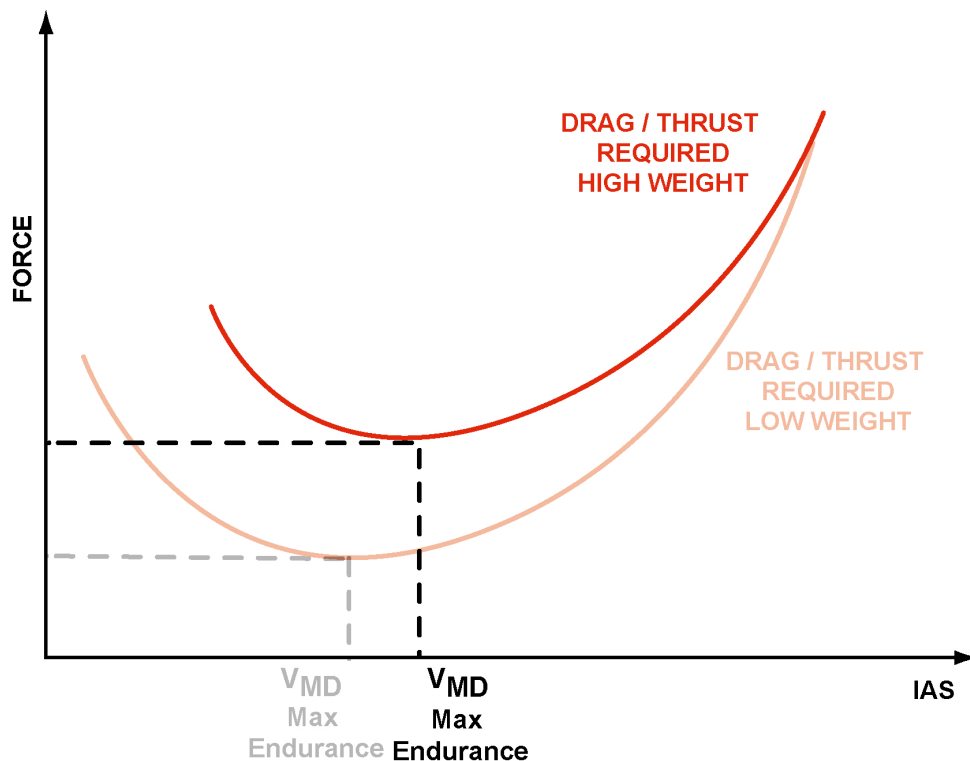


Figure 4.11 An illustration of the effect of weight on the drag and the speed for maximum endurance for a jet aeroplane

We must also note that the speed for maximum endurance, V_{MD} is now higher. For a propeller aeroplane the situation is similar. For a propeller aeroplane at higher weights, more power is required, therefore fuel flow increases and endurance decreases, but also the speed for best endurance, V_{MP} is higher. This can be seen in Figure 4.12.

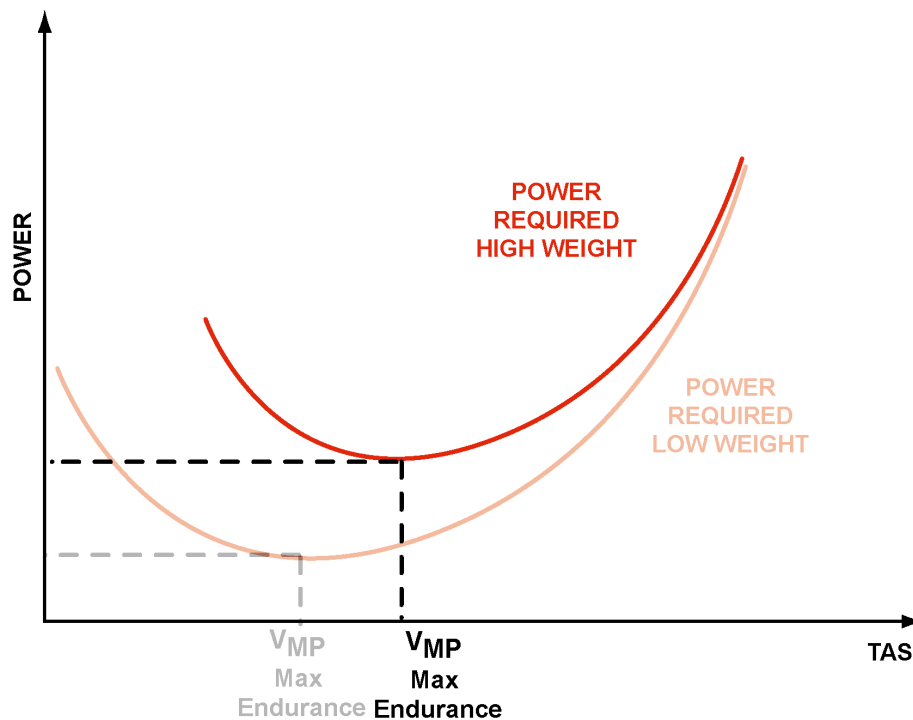


Figure 4.12 An illustration of the effect of weight on the power required and the speed for maximum endurance for a propeller aeroplane

There is one other effect that is seldom mentioned. At higher weights, operating altitudes are lower, which for a jet aeroplane means that the specific fuel consumption increases, because at lower altitudes, the jet engine is less efficient.

CONFIGURATION

The next factor which affects endurance is the aeroplane's configuration. While it seems an obvious point that the undercarriage and / or flaps should not be deployed in the cruise, there will be occasions when a pilot will find himself stacked with other aeroplanes in a holding pattern over the destination airfield. As the aeroplane at the lowest level exits the hold to land, the other aeroplanes will have to descend to a lower hold and eventually prepare for the landing by deploying undercarriage and flaps. You will recall that deploying the flaps and undercarriage increases parasite drag and thus causes the total drag curve and power required curve to move up and left. Looking at Figure 4.13 which is for a jet aeroplane and uses the drag curve, you can see that with the gear and flaps deployed, the aeroplane has more drag and therefore requires greater fuel flow, but notice that the speed for maximum endurance, V_{MD} is now lower.

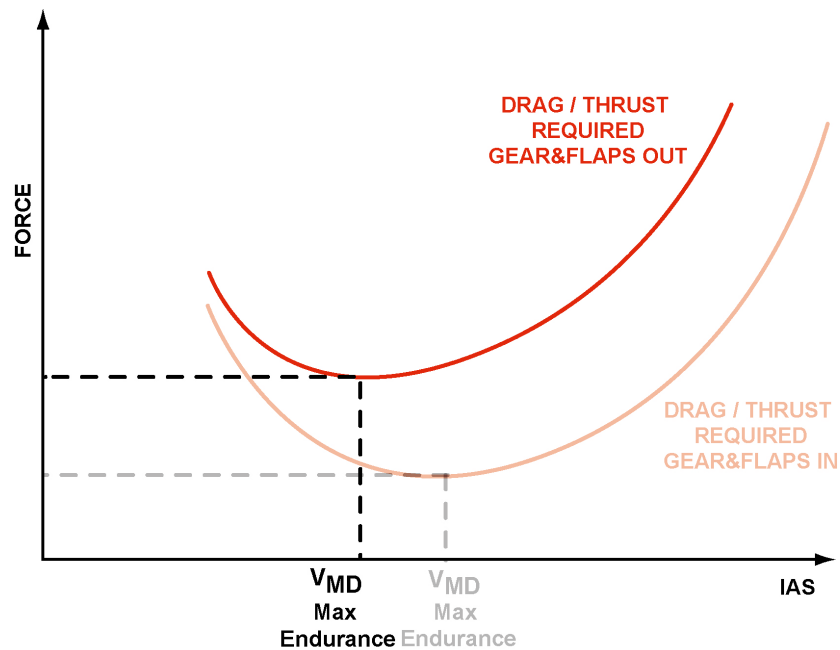


Figure 4.13 An illustration of the effect of gear and flaps on the drag and the speed for maximum endurance for a jet aeroplane

Using Figure 4.14 which is for a propeller aeroplane, it is much the same. With gear and flaps deployed, more power is required, therefore fuel flow increases and endurance decreases, but also the speed for best endurance, V_{MP} is lower.

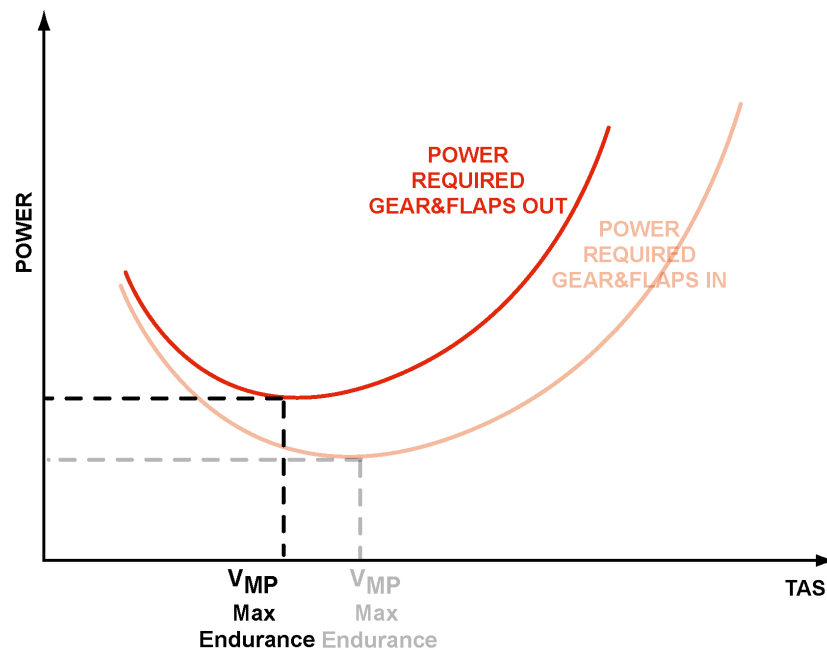


Figure 4.14 An illustration of the effect of gear and flaps on the power required and the speed for maximum endurance for a propeller aeroplane

Fuel flow in the landing configuration can increase by 150% compared to a clean configuration, so it is important not to deploy gear or flaps too early and unnecessarily increase the fuel costs for the flight.

WIND AND ALTITUDE

The case of wind is quite simple. It has no effect on endurance. You will remember that maximum endurance is concerned with minimising fuel flow. It should be obvious that wind does not affect the fuel flow into the engine. Endurance is about time in the air, not distance covered. Whatever the effect of wind, an aeroplane will still remain airborne only for as long as it has useable fuel in its tanks.

Altitude however, does affect endurance. Its effect though is a little complicated and is very dependent on engine type. Generally jet aeroplanes become more efficient as altitude increases partly due to the decreasing ambient temperature, but also because of the increasing rpm required to maintain thrust. Therefore, theoretically, the maximum endurance of a jet aeroplane will be achieved when flying at or above the tropopause where the ambient air temperature is lowest.

Turbo propeller aeroplanes function in a similar way to a jet since they are, in essence, jet engines with a propeller attached to a geared shaft. However, even though the turbo-propeller engine gains efficiency with altitude, the power required increases due to the rising TAS offsetting the efficiency gains. This means that for the majority of modern turbo-propeller aeroplanes, maximum endurance is achieved at around 10,000 ft or less.

Piston engine aeroplanes are most efficient at sea level when the manifold pressure is high and rpm is low, provided that the mixture has been leaned correctly.

In summary then, jet aeroplanes achieve maximum endurance at or above the tropopause; turbo propeller aeroplanes reach maximum endurance at about 10,000 ft and piston engine aeroplanes have their maximum endurance at sea level.

RANGE

You have learnt that there are two performance parameters in the cruise; range and endurance. Lets us now consider range. Range is a more useful performance parameter than endurance, and one that aircraft designers continually try to improve. Whereas endurance is about airborne time, range is more concerned with distance covered and it is, therefore, sometimes referred to as "fuel mileage". For range, not only is the concern to minimise the fuel flow, but more importantly to maximise the speed. This will allow the aeroplane to travel a greater distance.

Maximum range can be defined as being the maximum distance an aeroplane can fly for a given fuel quantity consumed or to put it another way, the minimum fuel used by an aeroplane over a given distance. This latter expression of range is more commonly used for commercial operations. As a formula, range is simply the distance in nautical miles divided by fuel quantity in kilograms.

$$\text{RANGE} = \text{DISTANCE (nm)} \div \text{FUEL (kg)}$$

However, in the same way as we did for the formula for endurance we must adjust our range formula needs in order for it to give us useful information. The range that an aeroplane can achieve is determined by the speed of the aeroplane and the fuel flow. The top line of the formula is nautical air miles per hour (TAS) and the bottom line of the formula is kilograms of fuel per hour. Thus the formula now reads true air speed divided by fuel flow.

$$\text{SPECIFIC RANGE (SR)} = \text{TAS} \div \text{FUEL FLOW}$$

This is the formula for Specific air range. The formula shows that specific air range is defined as the ratio of true airspeed over the fuel flow. You may recall from the endurance section, that fuel flow is specific fuel consumption multiplied by drag for a jet and specific fuel consumption multiplied by power required for a propeller driven aeroplane. Looking at the formulae it is now obvious that in order to maximise the specific range of the aeroplane, true air speed must be high, and the fuel flow must be low.

$$\text{JET} \quad \text{SPECIFIC RANGE (SR)} = \text{TAS} \div \text{SFC} \times \text{DRAG}$$

$$\text{PROPELLER} \quad \text{SPECIFIC RANGE (SR)} = \text{TAS} \div \text{SFC} \times \text{POWER REQUIRED}$$

JET AEROPLANE RANGE

Let us now focus on the specific air range of the jet aeroplane. We stated earlier that to maximise the range, the TAS must be high, and the specific fuel consumption and the drag must be low. Shown in Figure 4.15 is a drag curve for a jet aeroplane. If the aeroplane were to fly at V_{MD} then of course the drag force would be at its lowest.

Referring to the formula for specific range which shown in the graph it seems we have solved one of the points, namely how to make drag as low as possible. However, notice that because the drag curve is fairly flat at the bottom, the speed may be increased significantly from V_{MD} for only a small drag penalty.

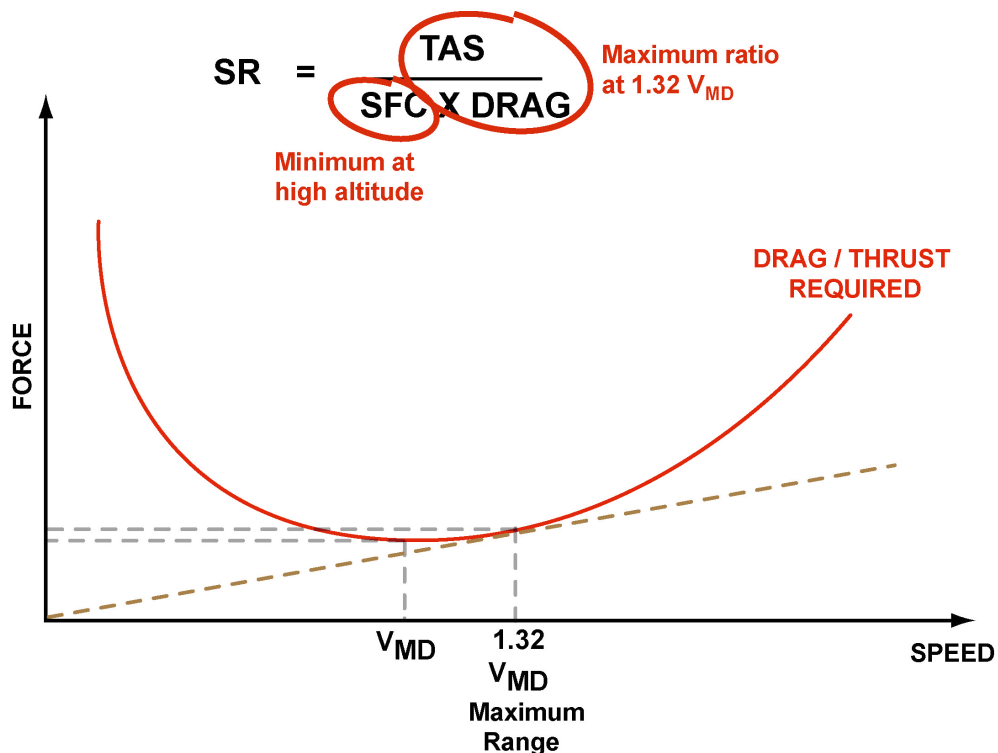


Figure 4.15 A graph showing the speed for maximum range for a jet aeroplane

We can therefore see that whilst drag has increased a little, which is bad for range, the air speed has increased significantly, which is good for range. Consequently the overall effect is that there is an increase in specific range.

The speed at which the speed over drag ratio is maximised may be read from the graph at the tangent to the curve. You may recall that this speed was $1.32 V_{MD}$. Therefore it is $1.32 V_{MD}$ that is the speed for maximum range for a jet aeroplane.

There is now only one remaining item left in the formula which still needs to be resolved. In order to increase range even more, specific fuel consumption must be decreased. You may recall that the only way to do this for a jet aeroplane is to operate at as high an altitude as possible. Operating as high as possible will give us a higher true airspeed for any given indicated airspeed which, again, will improve the specific range.

PROPELLER AEROPLANE RANGE

Having completed the analysis of range for a jet aeroplane, let us now examine specific air range for a propeller aeroplane. We stated earlier that to maximise the specific range, the TAS must be high, and the specific fuel consumption and the power required must be low. Shown in Figure 4.16 is the power required curve for a propeller aeroplane. If the aeroplane were to fly at V_{MP} then of course, its engine would be delivering minimum power required for level flight. It seems then, that we have solved one of the components, namely to make power required as small as possible.

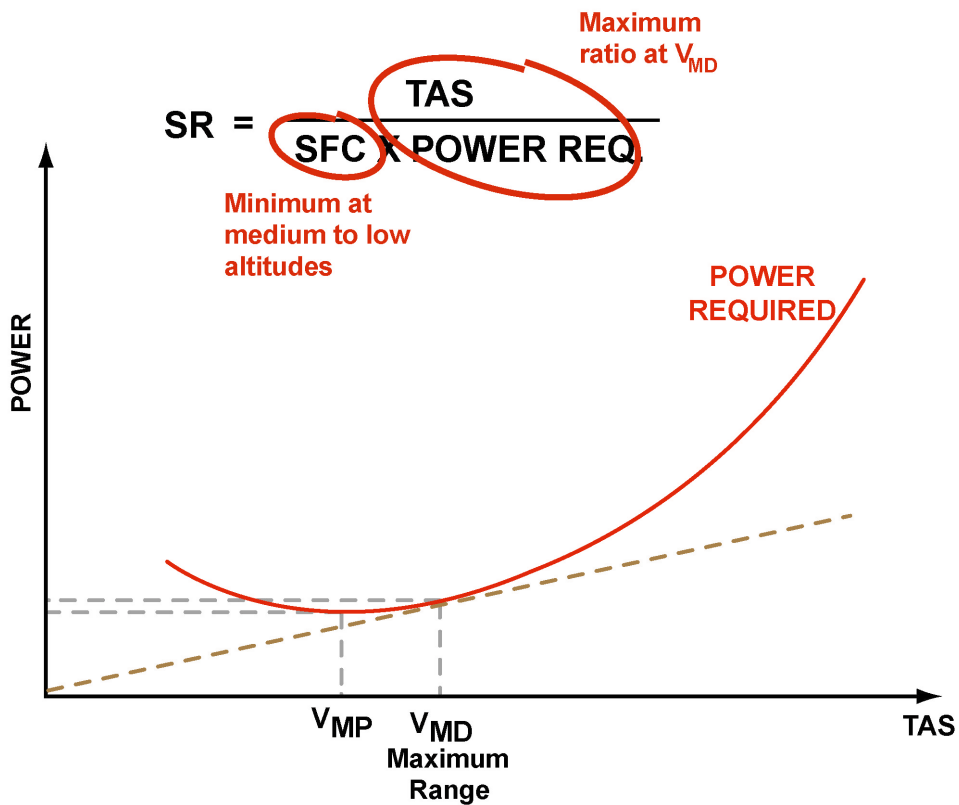


Figure 4.16 A graph showing the speed for maximum range for a propeller aeroplane

However, looking at the graph, you will notice, like for the jet aeroplane, that because the power required curve is fairly flat at the bottom, the aeroplane speed may be increased significantly from V_{MP} for only a small penalty increase in the power required. You can see that whilst power required has increased a little, which is bad for range, the air speed has increased significantly,

which is good for range. Consequently the overall effect is an increase in the range. The point at which the speed power ratio is at a maximum is the tangent point of the curve. You may recall that this speed is V_{MD} . Therefore it is V_{MD} that is the speed for maximum range for a propeller aeroplane.

There is now only one remaining item left in the formula which still needs to be resolved. In order to maximise range even more, specific fuel consumption must be decreased. However, you may remember that specific fuel consumption for piston aeroplane is more or less best at low altitudes, whereas for turbo-propeller aeroplanes which use jet engines, the specific fuel consumption decreases with altitude up to a point about halfway up the troposphere.

FACTORS AFFECTING RANGE

WEIGHT

Having studied how to achieve maximum range for both jet and propeller engines, let us now examine what factors affect range. The first of the factors to discuss is the effect of weight. You will recall that increasing the weight of the aeroplane increases induced drag and thus moves the total drag curve and power required curve up and right.

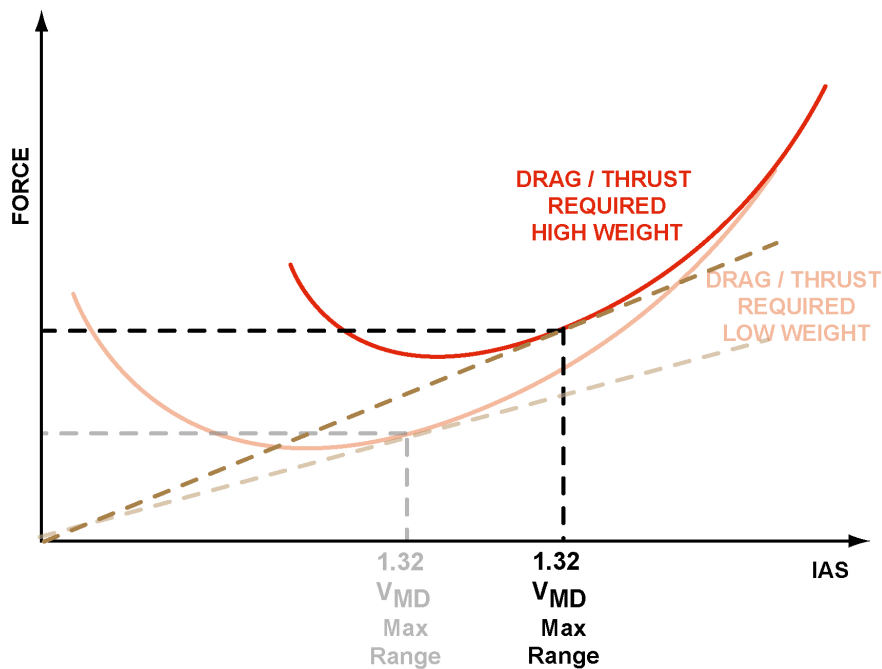


Figure 4.17 A graph showing the effect of weight on drag and the speed for maximum range for a jet aeroplane

Looking at Figure 4.17 which is for a jet aeroplane, you can see for higher weights, the aeroplane is subject to a higher drag force and therefore requires a higher rate of fuel flow. This will decrease specific range. However, notice that the speed for maximum range, $1.32 V_{MD}$ is now higher.

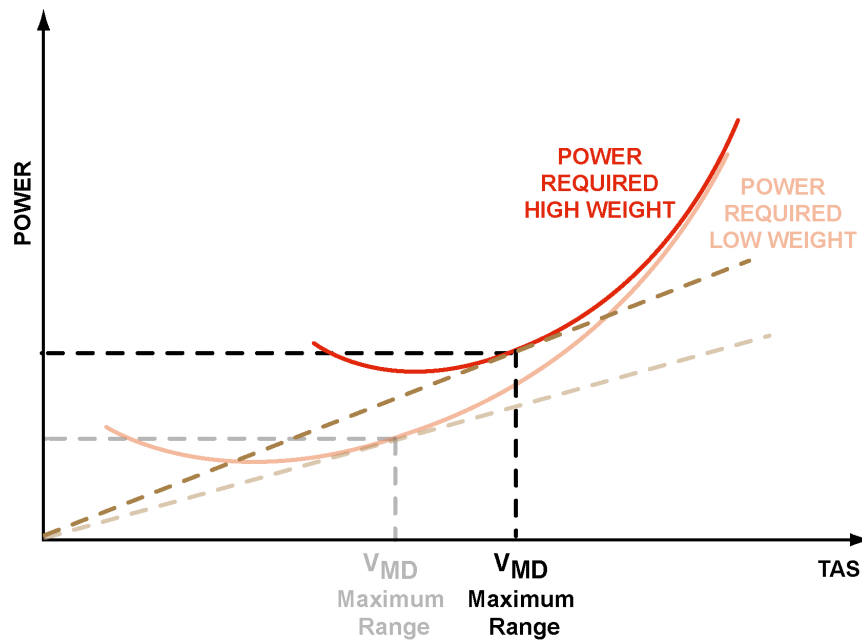


Figure 4.18 A graph showing the effect of weight on power required and the speed for maximum range for a propeller aeroplane.

Using Figure 4.18 which is for a propeller driven aeroplane, it is much the same as the jet. At higher weights, more power is required, therefore fuel flow increases and range decreases. However, notice too, that the speed for best range, V_{MD} , is higher.

Remember also that at higher weights, the operating altitudes are reduced, which for a jet aeroplane means that the specific fuel consumption increases, because at lower altitudes, the jet engine is less efficient.

PAYLOAD Vs RANGE

One of the most important issues that airline operators need to consider is the choice of the aeroplane they operate. This choice is mainly based upon the required aeroplane's payload and range. These requirements can be best described by going through a typical example. Shown in Figure 4.19 is the payload range graph for a Boeing triple seven. On the vertical axis is the payload in thousands of kilograms and the horizontal axis shows the aeroplane range in thousands of nautical miles.

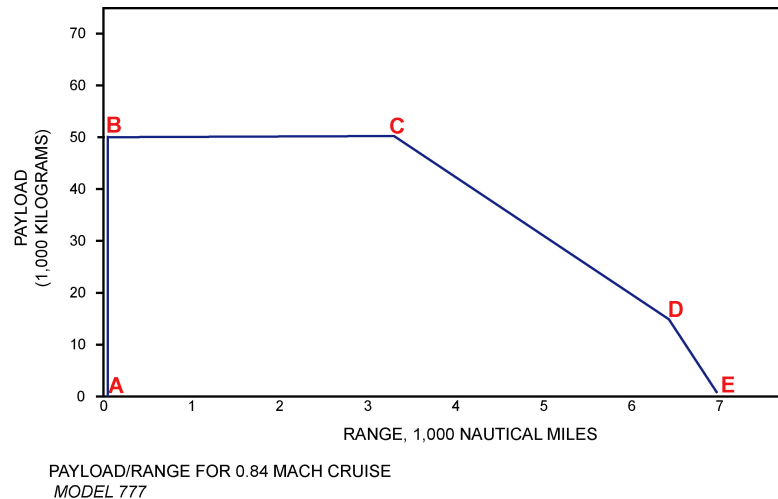


Figure 4.19 A graph showing the payload verses the range of a typical Boeing 777

Using Figure 4.19 as the payload is initially added to the aeroplane the marker moves from point A to point B. However, payload will reach a maximum when either there is no more space on the aeroplane or the aeroplane has reached its zero fuel mass (ZFM). Notice that the range at point B is zero because no fuel has been added yet. Fuel is now added to the aeroplane and the blue marker line moves to the right showing an increase in range. Adding fuel can continue until the maximum structural take off mass is achieved. This is shown by point C on the graph. Although maximum mass has been reached, it is unlikely that the tanks are full at this stage. To increase range further, more fuel must be added. But since the maximum mass has been achieved, the only way to add more fuel is if some of the payload is exchanged for fuel. Now the marker will start to move down and right. This shows that range is increasing but the payload is decreasing. Swapping payload for fuel in this way can continue only until the tanks are full, as shown by point D. From point C to point D the total mass of the aeroplane has remained constant since we are simply swapping payload for fuel.

The only way to increase the range beyond point D, even though the tanks are full, is to remove the rest of the payload. You will recall that reducing weight increases range. Reducing the payload completely moves the marker line from point D to point E. At point E, the aeroplane has full tanks, maximum range but no payload.

In the majority of airlines the trade off between range and payload is carried out on initial aeroplane purchase and thereafter, during in flight planning. As a pilot it is unlikely you will be required to work through these graphs other than to check and confirm the data that has been prepared in advanced for you.

CONFIGURATION

Another factor affecting the range is the aeroplane's configuration. You will recall that deploying the flaps and undercarriage increases parasite drag and thus moves the total drag curve and power required curve up and left.

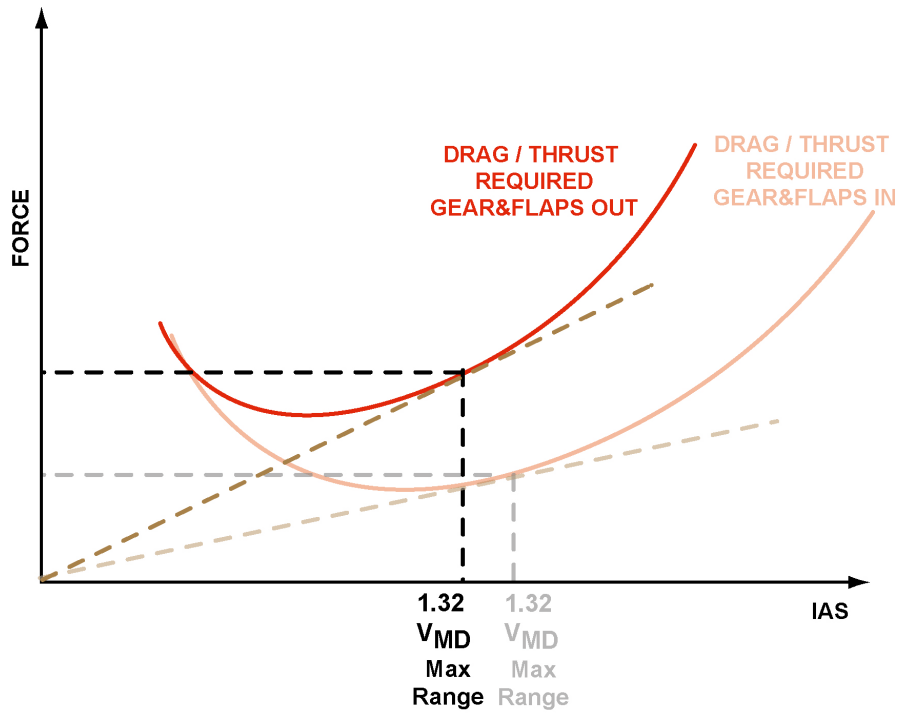


Figure 4.20 A graph showing the effect of configuration on drag and the speed for maximum range for a jet aeroplane

Shown in Figure 4.20 is the graph for the jet aeroplane which is up and to the left using the drag curve. You can see that with the gear and flaps deployed, the aeroplane has more drag and therefore needs more thrust and which, in turn, requires greater fuel flow. This will decrease the range. However, notice that the speed for maximum range, $1.32 V_{MD}$ is now lower.

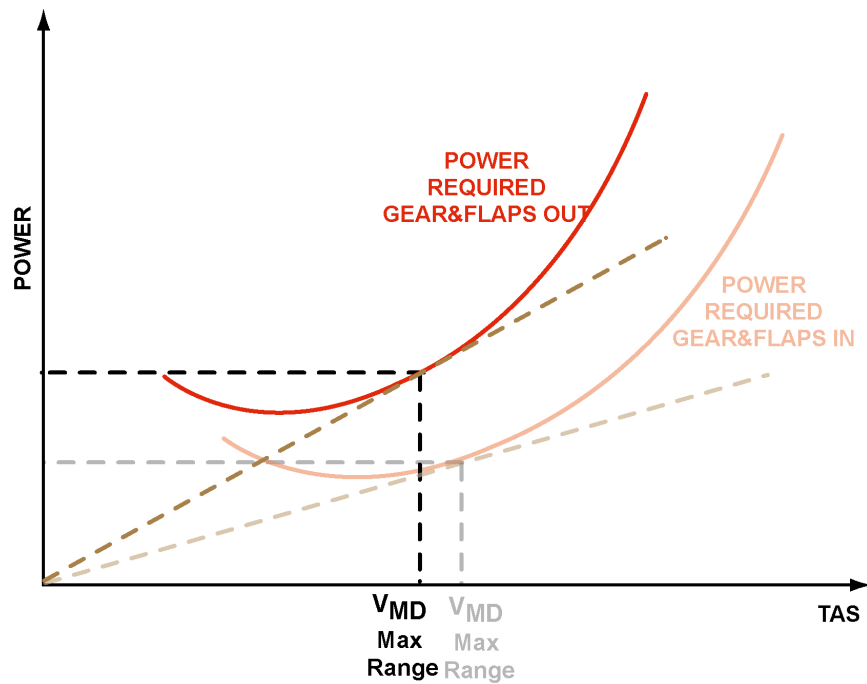


Figure 4.21 A graph showing the effect of configuration on power required and the speed for maximum range for a propeller aeroplane

Looking at Figure 4.21 which is the range graph for a propeller aeroplane you can see that matters are much the same. With gear and flaps deployed, more power is required. Therefore fuel flow increases and range decreases. But also notice that the speed for best range, V_{MD} is lower.

A point always to bear in mind in the cruise is that any increase in parasite drag will be detrimental to range and endurance. Increases in parasite drag can be caused by any number of things such as damaged and misaligned surfaces. The extra drag created by misaligned or misrigged airframe surfaces creates a type of drag called excrescence drag. This can be more than 4% of the aeroplane's total drag. Careful pre-flight inspection should reveal misaligned or misrigged surfaces.

An important point to consider over which the pilot has direct control is aeroplane trim. A pilot must periodically check the aileron and rudder trim, the spoiler misfair and the trailing edges to ensure that the aeroplane is "in trim" and is in balanced flight. Monitoring the aeroplanes control surfaces will help to reduce the extra drag and extra fuel consumption that out of trim and unbalanced flight can cause.

Lastly, contamination on the airframe from airframe icing can affect fuel flow. This icing will not only change the shape of the wing, making it less efficient at producing lift, but it will also increase weight and drag. All this is detrimental to aircraft performance and will reduce the aeroplanes range.

WIND

Wind is the next of the major factors affecting the range of an aeroplane. Headwinds will cause the aircraft to travel slower over the ground and therefore cover less distance for a given level of fuel consumption. Thus in headwinds range is reduced. In order to minimise this effect the speed of the aeroplane is increased by a margin slightly less than the amount of the headwind. The increase in speed will increase the thrust and the power required and therefore the fuel consumption, but on a positive side the aeroplane will be exposed to the headwind for a shorter time period if it is flying faster. This higher speed then recovers some of the range loss caused by the headwind. On the contrary, a tailwind will increase the ground speed and increase the distance covered for a given level of fuel consumption, thereby increasing range. For maximum range with a tailwind, the speed for the best range should be decreased slightly so as to reduce the thrust and power required. This will therefore reduce the fuel flow and increase the range a little more. The reduction in speed is slightly less than the speed of the tailwind component being experienced.

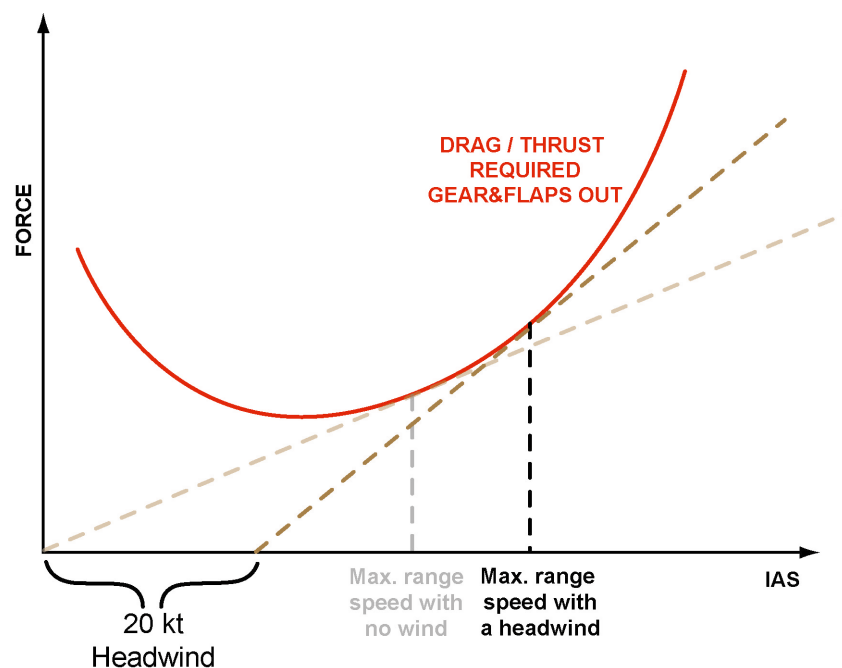


Figure 4.22 A graph showing the effect of a headwind on the speed for maximum range for a jet aeroplane.

The headwind and tailwind speed changes can be seen on the drag and powers curves for the jet and propeller aeroplane. However, to simplify things, we'll just concentrate on the drag curve for the jet aeroplane.

Looking at Figure 4.22, with a 20 knot headwind, the origin of the tangent line moves 20 knots to the right. Notice that the tangent meets the curve at a point corresponding to a higher speed, thus confirming that in a headwind the speed for best range is higher. The opposite is the case in a tailwind scenario. With a tailwind of 20 knots, the origin of the tangent line moves 20 knots left. The tangent meets the curve at a point corresponding to a lower speed. This confirms that in a tailwind the speed for best range is lower than in conditions of zero wind.

ALTITUDE (JET AEROPLANES)

The effect of altitude on the range of an aeroplane is important, especially for a jet aeroplane. Below is the formula for the specific air range for a jet aeroplane. Let us examine how the variables change with increasing altitude.

$$\text{SPECIFIC RANGE (SR)} = \text{TAS} / \text{SFC} \times \text{DRAG}$$

As aeroplane operating altitude increases, the colder air and requirement for increasing rpm cause the specific fuel consumption to decrease which will help to increase the specific air range. However there are two other variables left to consider, namely the true airspeed and the drag.

Lets deal with true air speed first. If you think back to the part of the lesson where we were analysing the effects of altitude on the various speeds, you will recall that if the aeroplane operates at higher and higher altitudes at the constant indicated or calibrated airspeed of $1.32 V_{MD}$, the true airspeed increases. The effect of increasing altitude and therefore increasing true airspeed acts together with the reducing specific fuel consumption to help increase the specific range. Therefore, specific range increases with altitude.

However, the last element of the formula to consider is drag. You will recall that with altitude, as the true airspeed increases and the local speed of sound decreases, the Mach number increases. This means that the aeroplane is approaching the speed of sound and approaching its maximum operating mach number, M_{MO} . The problem with this is that beyond a certain mach number, the compressibility factor and approaching shockwave will cause drag to increase. This will be detrimental to the specific range as you can see on the formula. However, it is a little more complicated. As altitude increases, if the Mach number is allowed to get too high, the penalty due to drag will start to outweigh the benefits of increasing TAS and reducing specific fuel consumption. It is at this point that the specific air range will start to reduce. Using the left hand blue line in the graph in Figure 4.23 you can see that initially specific range increases with altitude but then above a certain altitude the specific range decreases.

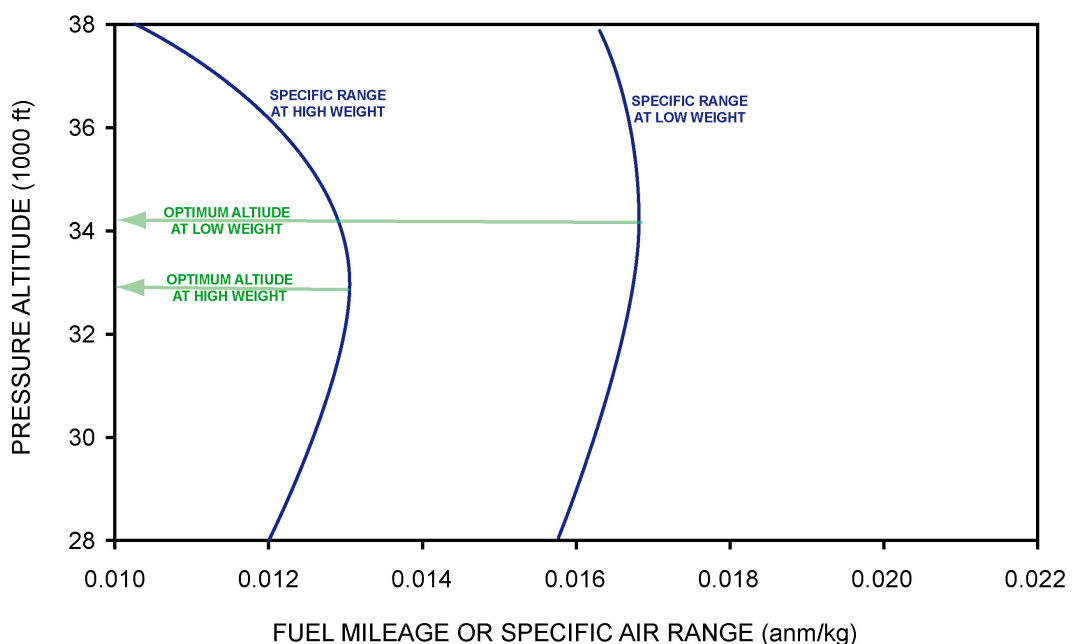


Figure 4.23 A graph showing the effect of altitude on specific range for a jet aeroplane at high and low weights

OPTIMUM ALTITUDE

Using the left hand blue line, in Figure 4.23, you will notice that there is an altitude at which the specific range is greatest; in our example this is just below 33,000 ft. This altitude is called the Optimum Altitude. It is defined as being the pressure altitude which provides the greatest specific range or fuel mileage at a given weight and speed. Flying higher or lower than the optimum altitude will decrease the range of the aeroplane.

It is important to understand that the optimum altitude is not fixed. You will recall that as the weight decreases through fuel burn, the drag curve moves down and left. Therefore, the best range speed, $1.32 V_{MD}$, falls and the total drag decreases. Therefore, with decreasing weight the aeroplane needs to slow down to maintain the best range speed. As it does so, the Mach number will also decrease meaning that the aeroplane is not limited by the high Mach number and corresponding high drag. This fact allows the aeroplane to climb a little. As the aeroplane climbs the Mach number will increase again to its previous limiting value and drag will increase back to its previous value. But more importantly the higher altitude has decreased the specific fuel consumption. Therefore, the specific air range increases during this little climb. This means that over time, as the weight decreases with fuel burn, the optimum altitude increases. You can see this in Figure 4.23 by comparing the specific range line for high and low weight. Notice too that the as the optimum increases the specific range increases. Plotting the change of the optimum altitude over time can be seen in Figure 4.24.

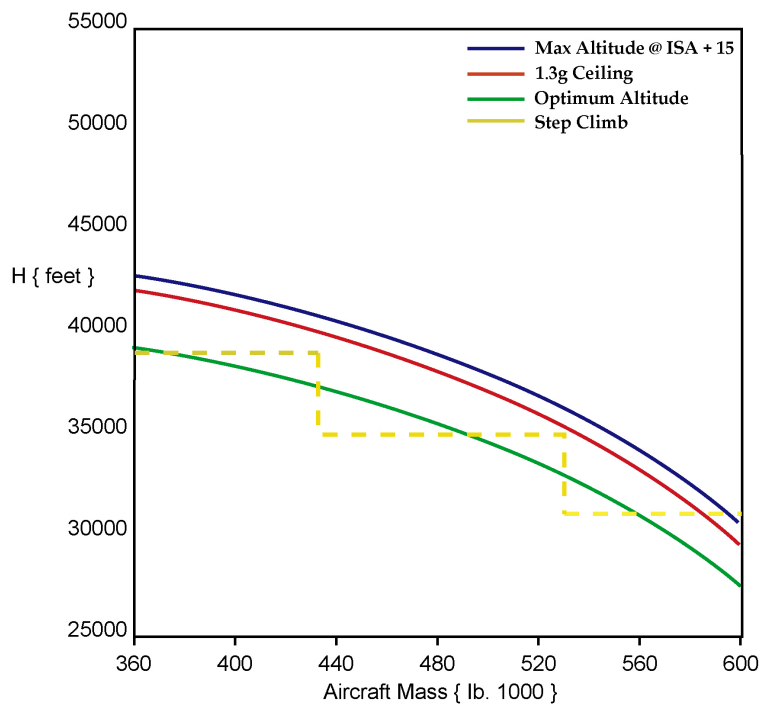


Figure 4.24 A graph showing the optimum altitude increasing with height as the flight progresses for a typical jet aeroplane

In order for the aeroplane to maximise the specific range the aeroplane must stay with the optimum altitude as the optimum altitude slowly increases, in other words the aeroplane must climb along the green line shown in Figure 4.23. Climbing in this way is sometimes called a “cruise climb”. But carrying out a cruise climb is not always possible, since air traffic control and airspace congestion may predetermine flight cruising levels. If this is the case, in order to stay close to the optimum altitude, step climbs may be performed and are shown by the dashed yellow line in Figure 4.24.

STEP CLIMBS

Step climbs essentially mean that the aeroplane climbs to about 2000 ft above the optimum altitude and levels off. As fuel is used and weight falls, the optimum altitude will increase to a point where it is again 2000 ft above the aeroplane's current level but it can take up to 3 hours for it to do so. At its current level the aeroplane can then climb 4000 ft and level off so that it will once again be 2000ft above the optimum altitude. But, if the last step climb is within 200 nm of the top of descent, then the fuel saving is negated and the aeroplane should remain level. The step climb process can be repeated throughout the cruise and it helps to explain why the cruise altitudes at the end of the flight are higher than at the start.

Carrying out step climbs in this way, rather than always staying with the optimum altitude will increase fuel consumption by about 1% and therefore decrease the maximum range by 1%. This may not sound like much, but over a year a typical 747 would have used an extra 34,000 tonnes of fuel. If an aeroplane did not even step climb and simply remained at a constant altitude during the cruise, then the aeroplane would increase its fuel consumption by 10% compared to flying constantly at the optimum altitude. This demonstrates just how important altitude and speed control is in the cruise for a typical commercial flight.

ALTITUDE (PROPELLER AEROPLANES)

Having discussed the effect of altitude on the jet aeroplane, let us now consider the effect of altitude on the propeller aeroplane. In general though, we may say that most turbo propeller aeroplanes operate significantly lower than their jet counterparts. Turbo propeller aeroplanes seldom operate above 30,000 feet, and therefore never really suffer from the effects of getting close to the speed of sound. Turbo-propellers are based on the same engine design as a pure jet, therefore, the effect of altitude on the turbo propeller is very similar to the jet aeroplane. As altitude increases the increasing TAS and slightly decreasing specific fuel consumption help to improve the specific range. However, this benefit is offset a little by the increasing power required at higher altitude. So whilst specific range does improve with altitude, above 10,000ft it only improves by a small amount. The choice of altitude may depend more on the wind considerations and the time and fuel considerations involved in climbing to the selected altitude.

The other type of propeller aeroplane is that driven by a piston engine. You will recall that the piston engine aeroplane has a more or less fixed specific fuel consumption even though specific fuel consumption is lowest at high manifold pressures, low rpm and with the mixture correctly set. Therefore the only remaining variables in the specific air range formula for the piston engine aeroplane are the true airspeed and the power required.

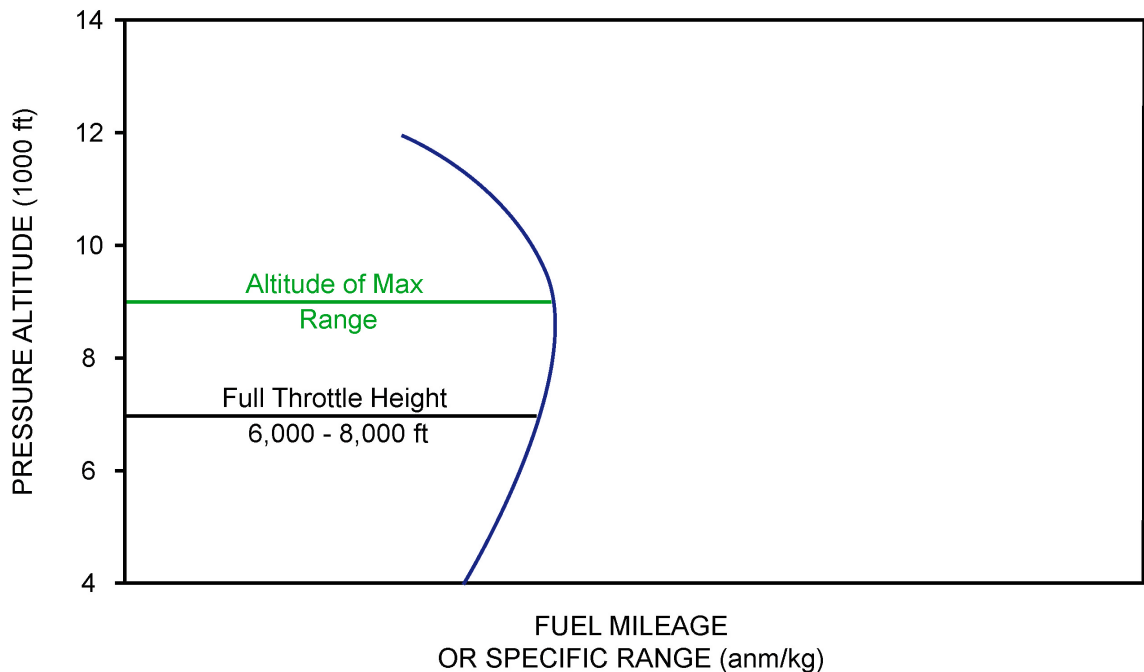



Figure 4.25 A graph showing the specific range with altitude for a typical piston propeller driven aeroplane


As the aeroplane operates at higher and higher altitudes the power required to maintain the range speed will increase. This of course is detrimental to range. However, as altitude increases, true airspeed increases for any given indicated airspeed and this is good for range. This fact slightly more than offsets the increase of power required and therefore the specific range slowly increases with altitude. However, the aeroplane will reach an altitude where the throttle needs to be fully advanced to maintain the selected speed. This altitude is called the full throttle height and it is shown in Figure 4.25. Beyond this altitude the selected power and selected airspeed cannot be maintained and the aeroplane will slow down. Very soon after this altitude, the true airspeed will also start to fall despite the decreasing density. This fact, combined with the constantly increasing amount of power required means that the specific range will decrease. As a result, maximum specific range will be attained just after full throttle height.

WIND ALTITUDE TRADE-OFF

The effect of headwinds and tailwinds on the range of the aeroplane can play a significant role in the choice of cruising altitude. For example, if there is a considerable headwind at the selected cruising altitude, this will be detrimental to the range. In this case, it may be beneficial to operate at a different altitude where the winds might be more favourable. In large commercial operations most of these considerations are dealt with prior to the flight by the flight planning personnel. However, in smaller operations, and if conditions change in flight, a pilot may have to carry out a wind altitude trade off calculation. Information enabling the pilot to do this is usually given in the aeroplane flight manual, an example of which is shown in Figure 4.26.

 A319/320/321 FLIGHT CREW OPERATING MANUAL	IN FLIGHT PERFORMANCE	3.05.15	P 7
	CRUISE	SEQ 020	REV 24

WIND ALTITUDE TRADE FOR CONSTANT SPECIFIC RANGE

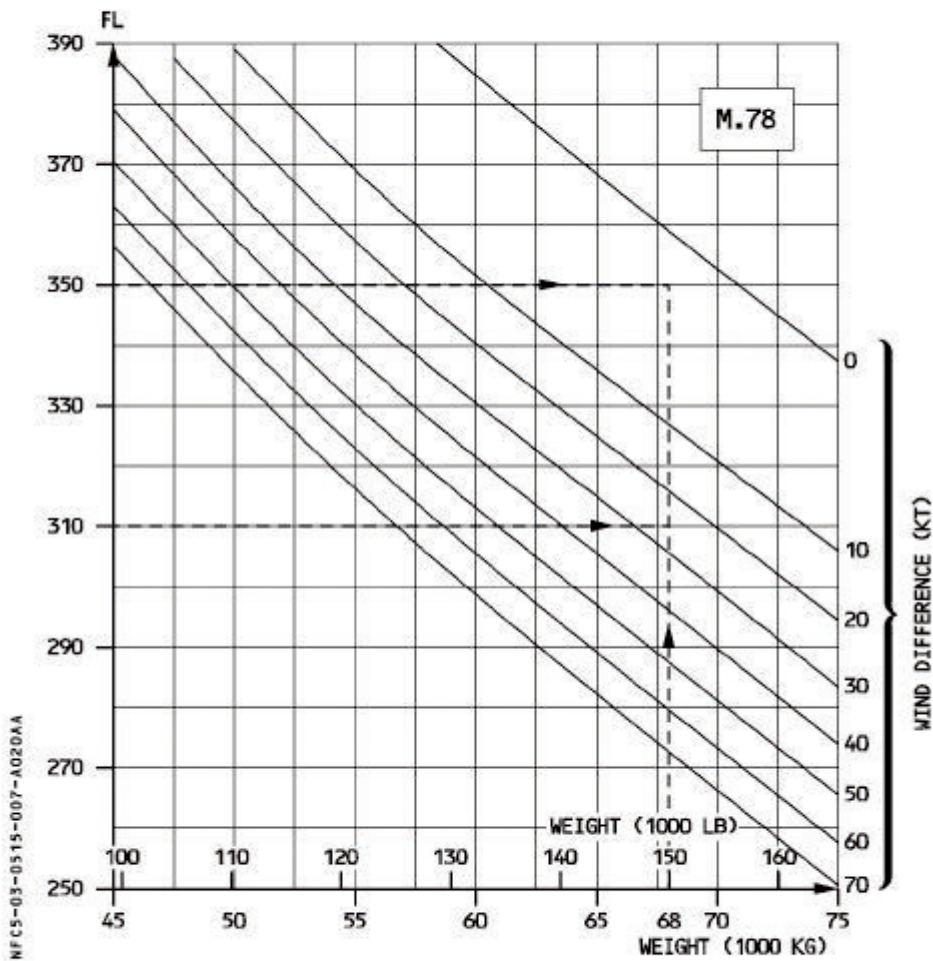

GIVEN : Weight : 68000 kg (150 000 lb)
 Wind at FL350 : 10 kt head
FIND : Minimum wind difference to descend to FL310 : $(26 - 3) = 23$ kt
RESULTS : Descent to FL310 may be considered provided the tail wind at this altitude is more than $(23 - 10) = 13$ kt.

Figure 4.26 An illustration of a typical wind altitude trade off graph for an Airbus aeroplane

LONG RANGE CRUISE (LRC)

Figure 4.27 shows the relationship between the speed of the aeroplane and its range. The top of the blue curve represents the point of maximum range and the speed to which this is found. For a jet aeroplane you will recall this speed is $1.32 V_{MD}$. In commercial operations this speed is more commonly referred to as the Maximum Range Cruise or MRC.

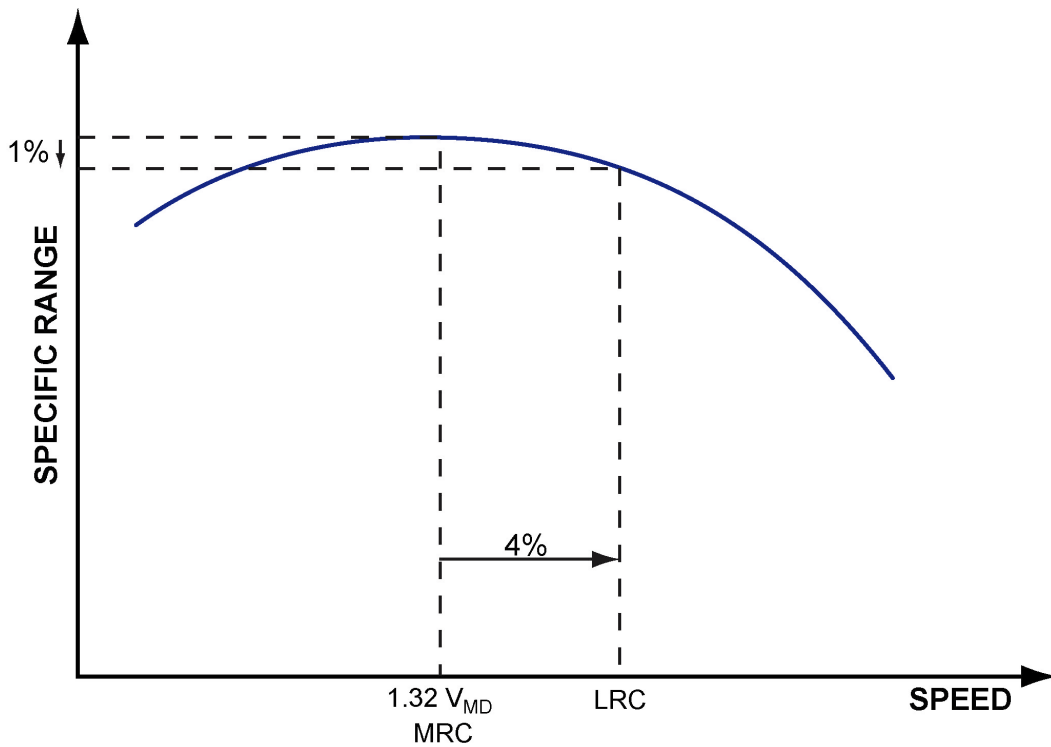


Figure 4.27 A graph showing the relationship of aeroplane speed and range

However, maximum range cruise speed is seldom flown. Usually, a higher speed is used. Looking at the top of the graph, you will notice the line is fairly flat. This means that a significant speed increase can be achieved with only a small compromise in range. This higher speed is called the Long Range Cruise (LRC). The Long Range Cruise speed is about 4% higher than the Maximum Range Cruise speed, and as such the specific range reduces by about 1%. The reason for using this higher speed is simply that there are costs other than fuel which need to be considered in commercial operations. A more detailed explanation of the relationships of these costs and how they affect the operations will be dealt with later on.

QUESTIONS

1. On a reciprocating engined aeroplane, with increasing altitude at constant gross mass, constant angle of attack and configuration, the power required:
 - a. remains unchanged but the TAS increases.
 - b. increases and the TAS increases by the same percentage.
 - c. increases but TAS remains constant.
 - d. decreases slightly because of the lower air density.

2. Moving the centre of gravity from the forward to the aft limit: (gross mass, altitude and airspeed remain unchanged)
 - a. increases the power required.
 - b. affects neither drag nor power required.
 - c. increases the induced drag.
 - d. decreases the induced drag and reduces the power required.

3. For jet-engined aeroplanes operating below the optimum altitude, what is the effect of increased altitude on specific range?
 - a. It does not change.
 - b. Increases only if there is no wind.
 - c. Increases.
 - d. Decreases.

4. If the thrust available exceeds the thrust required for level flight:
 - a. the aeroplane accelerates if the altitude is maintained.
 - b. the aeroplane descends if the airspeed is maintained.
 - c. the aeroplane decelerates if it is in the region of reversed command.
 - d. the aeroplane decelerates if the altitude is maintained.

5. Given a jet aircraft. Which order of speeds is correct?
 - a. V_s , Maximum range speed, V_x ,
 - b. Maximum endurance speed, Maximum range speed, V_X .
 - c. V_s , V_x , Maximum range speed.
 - d. Maximum endurance speed, Long range speed, Maximum range speed.

6. The pilot of a light twin engine aircraft has calculated a 4,000 m service ceiling with a take-off mass of 3,250 kg, based on the general forecast conditions for the flight. If the take-off mass is 3,000 kg, the service ceiling will be:
 - a. less than 4,000 m.
 - b. unchanged, equal to 4,000 m.
 - c. only a new performance analysis will determine if the service ceiling is higher or lower than 4,000m.
 - d. higher than 4,000 m.

7. Consider the graphic representation of the power required for a jet aeroplane versus true air speed (TAS). When drawing the tangent out of the origin, the point of contact determines the speed of:
- critical angle of attack.
 - maximum endurance.
 - minimum power.
 - maximum specific range.
8. In the drag versus speed curve for a jet aeroplane, the speed for maximum range corresponds with:
- the point of contact of the tangent from the origin to the drag curve.
 - the point of intersection of the parasite drag curve and the induced drag curve.
 - the point of contact of the tangent from the origin to the parasite drag curve.
 - the point of contact of the tangent from the origin to the induced drag curve.
9. The speed V_S is defined as the:
- speed for best specific range.
 - stalling speed or minimum steady flight speed at which the aeroplane is controllable.
 - safety speed for take-off in case of a contaminated runway.
 - design stress speed.
10. What is the effect of a head wind component, compared to still air, on the maximum range speed (IAS) and the speed for maximum climb angle respectively?
- Maximum range speed decreases and maximum climb angle speed decreases.
 - Maximum range speed increases and maximum climb angle speed increases.
 - Maximum range speed increases and maximum climb angle speed stays constant.
 - Maximum range speed decreases and maximum climb angle speed increases.
11. A jet aeroplane is flying at the long range cruise speed at the optimum altitude. How does the specific range / fuel flow change over a given time period?
- Decrease / decrease.
 - Increase / decrease.
 - Increase / increase.
 - Decrease / increase.
12. The maximum indicated air speed of a piston engined aeroplane, in level flight, is reached:
- at the service ceiling.
 - at the practical ceiling.
 - at the lowest possible altitude.
 - at the optimum cruise altitude.
13. The optimum cruise altitude increases:
- if the aeroplane mass is decreased.
 - if the temperature (OAT) is increased.
 - if the tailwind component is decreased.
 - if the aeroplane mass is increased.

14. What affect has a tailwind on the maximum endurance speed?
- No affect.
 - Tailwind only affects holding speed.
 - The IAS will be increased.
 - The IAS will be decreased.
15. Which of the equations below defines specific air range (SR)?
- $SR = \text{Groundspeed} / \text{Total Fuel Flow}$
 - $SR = \text{True Airspeed} / \text{Total Fuel Flow}$
 - $SR = \text{Indicated Airspeed} / \text{Total Fuel Flow}$
 - $SR = \text{Mach Number} / \text{Total Fuel Flow}$
16. Which of the following statements, with regard to the optimum altitude (best fuel mileage), is correct?
- An aeroplane usually flies above the optimum cruise altitude, as this provides the largest specific range.
 - An aeroplane sometimes flies above the optimum cruise altitude, because ATC normally does not allow to fly continuously at the optimum cruise altitude.
 - An aeroplane always flies below the optimum cruise altitude, as otherwise Mach buffet can occur.
 - An aeroplane always flies on the optimum cruise altitude, because this is most attractive from an economy point of view.
17. The optimum altitude:
- is the altitude up to which cabin pressure of 8 000 ft can be maintained.
 - increases as mass decreases and is the altitude at which the specific range reaches its maximum.
 - decreases as mass decreases.
 - is the altitude at which the specific range reaches its minimum.
18. A lower airspeed at constant mass and altitude requires:
- less thrust and a lower coefficient of lift.
 - more thrust and a lower coefficient of lift.
 - more thrust and a lower coefficient of drag.
 - a higher coefficient of lift.
19. The point at which a tangent out of the origin touches the power required curve:
- is the point where Drag coefficient is a minimum.
 - is the point where the Lift to Drag ratio is a minimum.
 - is the maximum drag speed.
 - is the point where the Lift to Drag ratio is a maximum.
20. The long range cruise speed (LRC) is in relation to the speed for maximum range cruise (MRC)?
- Lower.
 - Depending on the OAT and net mass.
 - Depending on density altitude and mass.
 - Higher

21. The maximum horizontal speed occurs when:
- The thrust is equal to minimum drag.
 - The thrust does not increase further with increasing speed.
 - The maximum thrust is equal to the total drag.
 - The thrust is equal to the maximum drag.
22. Under which condition should you fly considerably lower (4,000 ft or more) than the optimum altitude?
- If at the lower altitude either more headwind or less tailwind can be expected.
 - If at the lower altitude either considerably less headwind or considerably more tailwind can be expected.
 - If the maximum altitude is below the optimum altitude.
 - If the temperature is lower at the low altitude (high altitude inversion).
23. The optimum cruise altitude is:
- the pressure altitude up to which a cabin altitude of 8,000 ft can be maintained.
 - the pressure altitude at which the TAS for high speed buffet is a maximum.
 - the pressure altitude at which the best specific range can be achieved.
 - the pressure altitude at which the fuel flow is a maximum.
24. Maximum endurance for a piston engined aeroplane is achieved at:
- The speed that approximately corresponds to the maximum rate of climb speed.
 - The speed for maximum lift coefficient.
 - The speed for minimum drag.
 - The speed that corresponds to the speed for maximum climb angle.
25. On a long distance flight the gross mass decreases continuously as a consequence of the fuel consumption. The result is:
- The speed must be increased to compensate the lower mass.
 - The specific range increases and the optimum altitude decreases.
 - The specific range decreases and the optimum altitude increases.
 - The specific range and the optimum altitude increases.
26. A jet aeroplane is climbing at constant Mach number below the tropopause. Which of the following statements is correct?
- IAS decreases and TAS decreases.
 - IAS increases and TAS increases.
 - IAS decreases and TAS increases.
 - IAS increases and TAS decreases.
27. Why are 'step climbs' used on long distance flights?
- Step climbs do not have any special purpose for jet aeroplanes; they are used for piston engine aeroplanes only.
 - ATC do not permit cruise climbs.
 - To fly as close as possible to the optimum altitude as aeroplane mass reduces.
 - Step climbs are only justified if at the higher altitude less headwind or more tailwind can be expected.

28. Which of the following sequences of speed for a jet aeroplane is correct? (from low to high speeds).
- Maximum endurance speed, maximum range speed, maximum angle of climb speed.
 - Maximum endurance speed, long range speed, maximum range speed.
 - V_s , maximum angle climb speed, maximum range speed.
 - V_s , maximum range speed, maximum angle climb speed.
29. The pilot of a jet aeroplane wants to use a minimum amount of fuel between two airfields. Which flight procedure should the pilot fly?
- Maximum endurance.
 - Holding.
 - Long range.
 - Maximum range.
30. Long range cruise is selected as:
- the higher speed to achieve 99% of maximum specific range in zero wind.
 - the speed for best economy (ECON)
 - the climbing cruise with one or two engines inoperative.
 - specific range with tailwind.
31. The optimum long-range cruise altitude for a turbo-jet aeroplane:
- is only dependent on the outside air temperature.
 - increases when the aeroplane mass decreases.
 - is always equal to the powerplant ceiling.
 - is independent of the aeroplane mass.
32. Maximum endurance:
- is the same as maximum specific range with wind correction.
 - can be flown in a steady climb only.
 - can be reached with the 'best rate of climb' speed in level flight.
 - is achieved in unaccelerated level flight with minimum fuel consumption.
33. For a piston engined aeroplane, the speed for maximum range is:
- that which gives the maximum lift to drag ratio.
 - that which gives the minimum value of power.
 - that which gives the maximum value of lift.
 - 1.4 times the stall speed in clean configuration.
34. The speed for maximum endurance:
- is always higher than the speed for maximum specific range.
 - is always lower than the speed for maximum specific range.
 - is the lower speed to achieve 99% of maximum specific range.
 - can either be higher or lower than the speed for maximum specific range.

35. The intersections of the thrust available and the drag curve are the operating points of the aeroplane:
- in un-accelerated climb.
 - in un-accelerated level flight.
 - in descent with constant IAS.
 - in accelerated level flight.
36. For a jet transport aeroplane, which of the following is the reason for the use of 'maximum range speed'?
- Minimises specific fuel consumption.
 - Minimises fuel flow.
 - Longest flight duration.
 - Minimises drag.
37. The centre of gravity moving near to, but still within, the aft limit;
- increases the stalling speed.
 - improves the longitudinal stability.
 - decreases the maximum range.
 - improves the maximum range.
38. A jet aeroplane is performing a maximum range flight. The speed corresponds to:
- the minimum drag.
 - the minimum required power.
 - the point of contact of the tangent from the origin to the power required (Pr. versus TAS curve).
 - the point of contact of the tangent from the origin to the Drag versus TAS curve.
39. During a cruise flight of a jet aeroplane at a constant flight level and at the maximum range speed, the IAS / the drag will:
- increase / increase.
 - decrease / increase.
 - decrease / decrease.
 - increase / decrease.
40. Which of the following is a reason to operate an aeroplane at 'long range speed'?
- The aircraft can be operated close to the buffet onset speed.
 - In order to prevent loss of speed stability and tuck-under.
 - It offers greatly reduced time costs than with maximum range speed.
 - In order to achieve speed stability.
41. Long range cruise is a flight procedure which gives:
- an IAS which is 1% higher than the IAS for maximum specific range.
 - a specific range which is 99% of maximum specific range and a lower cruise speed.
 - a specific range which is about 99% of maximum specific range and higher cruise speed.
 - a 1% higher TAS for maximum specific range.

42. The lowest point of the drag or thrust required curve of a jet aeroplane, is the point for:
- minimum drag and maximum endurance.
 - maximum specific range and minimum power.
 - minimum power.
 - minimum specific range.
43. If other factors are unchanged, the fuel mileage or range (nautical miles per kg. is:
- independent from the centre of gravity position.
 - lower with an aft centre of gravity position.
 - higher with a forward centre of gravity position.
 - lower with a forward centre of gravity position.
44. To achieve the maximum range over ground with headwind the airspeed should be:
- lower compared to the speed for maximum range cruise with no wind.
 - reduced to the gust penetration speed.
 - higher compared to the speed for maximum range cruise with no wind.
 - equal to the speed for maximum range cruise with no wind.
45. When utilising the step climb technique, one should wait for the weight reduction, from fuel burn, to result in:
- The aerodynamic ceiling to increase by approximately 2,000ft above the present altitude, whereby one would climb approximately 4,000ft higher.
 - The optimum altitude to increase by approximately 2,000ft above the present altitude, whereby one would climb approximately 4,000ft higher.
 - The manoeuvre ceiling to increase by approximately 2,000ft above the present altitude, whereby one would climb approximately 4,000ft higher.
 - The en-route ceiling to increase by approximately 2,000ft above the present altitude, whereby one would climb approximately 4,000ft higher.
46. Which of the following statements is true regarding the performance of an aeroplane in level flight?
- The maximum level flight speed will be obtained when the power required equals the maximum power available from the engine.
 - The minimum level flight speed will be obtained when the power required equals the maximum power available from the engine.
 - The maximum level flight speed will be obtained when the power required equals the minimum power available from the engine.
 - The maximum level flight speed will be obtained when the power required equals the power available from the engine.

ANSWERS

1	B	21	C	41	C
2	D	22	B	42	A
3	C	23	C	43	D
4	A	24	D	44	C
5	C	25	D	45	B
6	D	26	A	46	A
7	B	27	C		
8	A	28	C		
9	B	29	D		
10	C	30	A		
11	B	31	B		
12	C	32	D		
13	A	33	A		
14	A	34	B		
15	B	35	B		
16	B	36	B		
17	B	37	D		
18	D	38	D		
19	D	39	C		
20	D	40	C		

CHAPTER FIVE
GENERAL PRINCIPLES - LANDING

Contents

LANDING DISTANCE261
LANDING DISTANCE AVAILABLE (LDA).262
LIFT AND WEIGHT262
REVERSE THRUST263
DRAG264
LANDING DISTANCE FORMULA266
EFFECT OF VARIABLE FACTORS ON LANDING DISTANCE267
HYDROPLANING.271
LANDING TECHNIQUE ON SLIPPERY RUNWAYS272
MICROBUSTS AND WINDSHEAR273
QUESTIONS275
ANSWERS278

LANDING DISTANCE

The landing stage of flight is defined as being that stage of flight commencing from 50ft above the landing threshold and terminating when the aeroplane comes to a complete stop as shown by Figure 5.1. The 50 ft point is sometimes referred to as the landing screen height. The landing screen height is fixed at 50 ft for all classes of aeroplane unlike the take-off screen height which is 35 ft for class A aeroplanes and 50 ft for class B aeroplanes.

From the approach down to the landing screen height the aeroplane must have attained the landing reference speed, known as V_{REF} . V_{REF} for Class A aeroplanes must be no less than the greater of 1.23 times the stall reference speed in the landing configuration ($1.23 V_{SRO}$) and the velocity of minimum control in the landing configuration (V_{MCL}). V_{REF} for all other classes of aeroplane must be no less than 1.3 times the stall speed ($1.3 V_{SO}$) in the landing configuration. V_{REF} is a very important speed to attain since the landing distances in the aeroplane flight manual are based on aeroplanes flying at V_{REF} . Therefore if a landing aeroplane is not at V_{REF} the landing distance given by the manual will not be achieved by the pilot. A landing carried out at a speed other than V_{REF} could seriously jeopardize the safety of the landing.

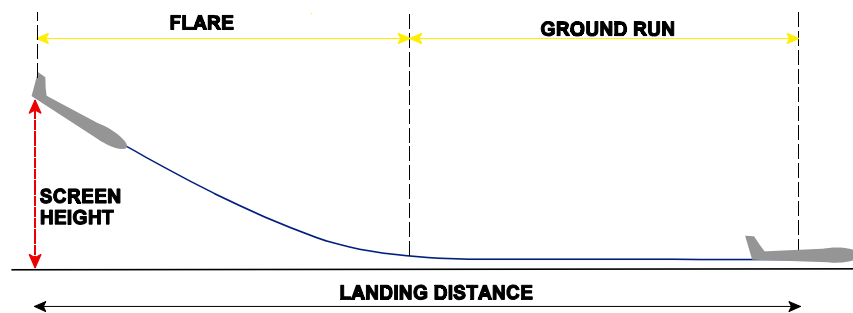


Figure 5.1 Landing Distance

The landing can be divided into two parts. We call these the airborne section and the ground run or landing roll

The first part, the airborne section starts from the landing screen height of 50 feet and ends when the aeroplanes main wheels touch the landing surface. The airborne section is usually given as being about 1000ft in length. Within the airborne section certain critical actions take place. On descending through the screen height the thrust is reduced to zero and the aeroplane pitch attitude is increased slightly so that the aeroplane is in a slight nose up attitude. The increase in pitch attitude helps to arrest the rate of descent and the reduction in thrust to zero reduces the speed. This procedure of reducing thrust and increasing pitch is known as the landing flare, although other terms like “roundout” are commonly used. The landing flare will allow the aeroplane to touch down onto the runway using the main wheels first. It is important to understand that the technique of flaring the aeroplane differs from one aeroplane to another and especially so between light general aviation aeroplanes and large commercial jet airliners.

The second part of the landing is the ground run, ground roll or landing roll. This is the distance covered from touchdown until the aeroplane comes to full stop. As with the airborne section, there are a few critical actions that are carried out. Once the main wheels have settled onto the landing surface reverse thrust and lift spoilers can be activated and as the speed decreases further, the nose wheel will then settle onto the landing surface. Braking force is now applied and the aeroplane will slow to a stop. However, in normal operations, the aeroplane does not stop on the runway; rather the aeroplane is slowed to a safe speed where it can then be steered off the runway and taxied to the disembarkation point or ramp. The combined length

of the 'airborne section' and the 'ground run or 'landing roll' is known as the "landing distance required". Pilots need to make sure that the landing distance required does not exceed the Landing Distance Available.

LANDING DISTANCE AVAILABLE (LDA)

The landing distance available is the distance from the point on the surface of the aerodrome above which the aeroplane can commence its landing, having regard to the obstructions in its approach path, to the nearest point in the direction of landing at which the surface of the aerodrome is incapable of bearing the weight of the aeroplane under normal operating conditions or at which there is an obstacle capable of affecting the safety of the aeroplane.



Figure 5.2 Landing Distance Available

In short, the landing distance available is the length of runway from one threshold to another. These are not always at the edge of the runway, sometimes there are displaced thresholds which are some way in from the edge of the paved surface. You will recall that the landing distance starts at 50 ft. This point must be directly above the threshold. Landing on the threshold is not the aim of the landing.

LIFT AND WEIGHT

In order to better understand landing performance we need to analyze the forces acting upon the aeroplane, and how these forces might be modified throughout the landing. The first of the forces that we will consider is weight. As you have learnt already, weight acts vertically downwards towards the centre of the earth from the centre of gravity. During flight, weight is mainly balanced by lift. However, once the aeroplane is on the ground weight is balanced by the reaction of the ground acting up through the wheels on the undercarriage. The weight of the aeroplane on landing will be less than at take-off due to the fact that fuel has been consumed. There is however, a maximum structural landing mass which must not be exceeded. Let's now consider lift. Whilst lift helps to balance weight when in the air, once the aeroplane is on the ground, lift is no longer required. In fact during the landing roll, lift is detrimental to

the landing performance. Producing lift will reduce the load placed on wheels and therefore decrease the braking effect. In large commercial aeroplanes once the main wheels have settled on the runway the lift spoilers or lift dumpers are deployed which act very quickly to disrupt the airflow over the wing and destroy lift.

REVERSE THRUST

Whilst in level flight the forward acting force of thrust is essential to maintain sufficient speed for the wings to provide lift. During landing, because the aim is to bring the aeroplane to a stop, the thrust force must be reduced to zero. Any residual thrust would be detrimental to the landing performance. However, large propeller and jet aeroplane engines have the capability of redirecting the force of thrust in order to generate a braking effect on the aeroplane. This is known as reverse thrust. Reverse thrust helps to reduce the aeroplanes forward speed. Reverse thrust capability is especially important in conditions where braking force is reduced due to ice or water contamination on the runway.

JET ENGINES

Jet engines produce reverse thrust by using one of several methods, but all jet engines follow the same basic principle which is to redirect the jet efflux in a forwards direction. Many modern aeroplanes have a safety device whereby reverse thrust is not activated until a certain value of the aeroplane's weight is pressing down on the main wheels and until the wheels have reached a certain speed of rotation. Once the aeroplane's reverse thrust system has detected this, reverse thrust is activated and the engine will reconfigure itself so that the exhaust gas flow can be redirected forwards. You can see the extent of the re-configuration in Figure 5.3.

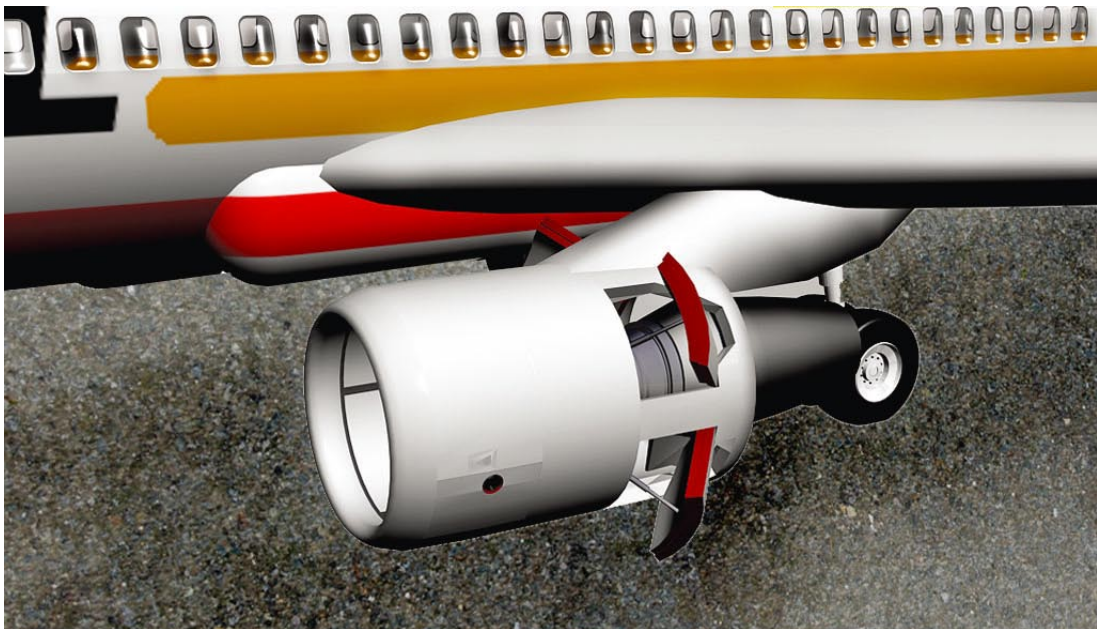


Figure 5.3 An illustration of a jet engine during reverse thrust mode.

However, pilots need to recognize that the process of getting the engines reconfigured to generate full reverse thrust takes time, and so the aeroplane will have travelled a small distance from the touchdown point before reverse thrust takes effect. This fact reduces the effective time period during which reverse thrust can be used. Therefore, the effectiveness of reverse thrust on landing is reduced.

It is important to note too that jet engine reverse thrust cannot be maintained right up to the point when the aeroplane comes to a full stop. Reverse thrust must be deactivated before the forward speed reduces to a minimum value. As the aeroplane slows down the redirected airflow may start to be re-ingested into the compressor. This means that the jet engine recycles its own gas flow which significantly increases the engine temperatures but it also means that debris on the runway can be sucked into the engine, potentially causing major damage. As a result of this danger to the engines at low forward speeds reverse thrust must be deactivated below about 50 kt.

The combined effect of late reverse thrust activation and early reverse thrust deactivation means that the time period for which reverse thrust can be used may be quite short.

PROPELLER AEROPLANES

Large turbo propeller aeroplanes are also able to generate reverse thrust by redirecting the air flow forwards, but they do so in a very different way than that employed by a jet engine. For forward flight the propeller blade is angled in such a way as to displace air backwards thus producing forward thrust. In order for the propeller blade to direct air forwards and create a rearward acting force the blade angle must change. The blade angle required for the propeller to generate reverse thrust is known as reverse pitch. Because only a change of blade angle is required, a propeller aeroplane can switch from forward to reverse thrust far quicker than a jet aeroplane. This means that a propeller aeroplane can use reverse thrust a earlier in the landing roll than a jet aeroplane.

A propeller aeroplane can also maintain reverse thrust until the aeroplane comes to a full stop. This capability gives the propeller aeroplane a greater braking advantage over the jet aeroplane during landing.

In summary, the usable period of reverse thrust in the landing roll is shorter for a jet aeroplane than for a propeller aeroplane. For this reason, the authorities have laid down less stringent landing performance regulations for propeller aeroplanes. The precise nature of these regulations will be discussed later.

DRAG

Let us now consider the action of the drag force during landing. You may recall that there are several forms of drag. The main types of drag are parasite drag and induced drag. However, whilst the aeroplane is on the ground, during take-off and landing, wheel drag must be considered alongside the aerodynamic drag. The aim of the landing is to bring the aeroplane to a stop safely within the confines of the runway. In order to decelerate, sufficient rearward directed forces need to act on the aeroplane. Consequently, in addition to reverse thrust aerodynamic drag plays a very crucial role in landing.

INDUCED DRAG

Of the two types of aerodynamic drag, we'll deal with induced drag first. Induced drag is dependent on lift and is proportional to angle of attack. During the airborne section of the landing, there is still a large amount of lift being generated and the angle of attack is relatively high. This means that induced drag is far higher than in cruising flight. However, when the aeroplane nose wheel touches the runway, the angle of attack is almost nil. Induced drag is consequently reduced to almost zero.

PARASITE DRAG

The second form of aerodynamic drag is parasite drag. Parasite drag is a function of the aeroplanes forward facing cross sectional area, more accurately known as form drag, and of the aeroplanes forward speed. The configuration of the aeroplane for landing is such that the flaps and slats are fully extended which significantly increases the aeroplanes form drag and therefore significant increases parasite drag. Once the aeroplane touches down, and the spoilers and speed brakes are deployed parasite drag increases even further. However, as the speed rapidly decays after touch down, so will the parasite drag; eventually decreasing to zero once the aeroplane reaches a full stop.

In summary then, the aerodynamic drag comprising induced drag and parasite drag will be very high during the early part of the of the landing, but very soon after touch down will decay rapidly.

WHEEL AND BRAKE DRAG

Having discussed aerodynamic drag, let's now consider wheel drag and brake drag. Wheel drag is the friction force between the wheel and the runway and with the wheel bearings, whereas brake drag is the friction force between the brake discs and the brake pads. Wheel drag will come into play as soon as the aeroplane touches down on the runway. However, as friction is a function of the force pushing two surfaces together, because there is still a lot of lift being generated, wheel load is small during the initial part of the landing run, and therefore wheel drag is also small. As speed reduces and as lift is destroyed by the spoilers, the wheel load increases which in turn increases the wheel drag. Therefore wheel drag increases throughout the landing roll and will reach a maximum value just before the aeroplane comes to rest.

Brake drag is by far the most important and the most effective of the various drag forces during the landing since it provides the greatest retarding force. However, brake drag is only effective if there is also sufficient wheel drag or wheel friction between the tyres and the runway. If wheel drag is low, brake drag will also be low. Consequently, the brakes are effective only if there is sufficient friction between the tyres and the runway. During the early part of the landing run when there is not much load on the wheels and therefore not much wheel friction. Brake drag is consequently ineffective in slowing down the aeroplane. However, as the lift reduces and more weight is placed on the wheels brake drag does become more effective in slowing down the aeroplane. Therefore, brake drag increases as the landing roll progresses. This concept explains why pilots need to destroy lift as soon as possible after touchdown so that the braking action can be at its peak effectiveness early on in the landing.

In most large commercial aeroplanes however, the braking action may not actually be carried out by the pilots. Instead it can be carried out by a highly effective automatic anti skid braking system. This braking system can be set to low, medium or high braking levels, or levels 1 through to 3, and is especially important to use when landing on contaminated runways.

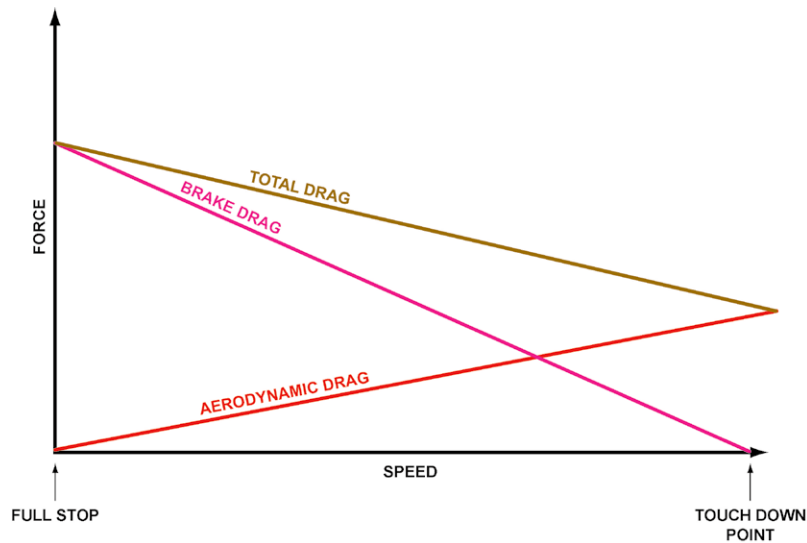


Figure 5.4 A graph showing the variations in drag through the landing roll

In summary then, the first of the drag forces we discussed was aerodynamic drag. As speed decreases during the landing run, aerodynamic drag comprising of parasite and induced drag decreased.

Brake drag on the other hand increased during the landing roll as more load was placed on the wheels. Notice that during the early part of the landing roll, aerodynamic drag provides the majority of the drag, whereas once the speed has dropped below 70% of the landing speed, brake drag provides the majority of the drag.

The last line on the graph is total drag. From this line you can see that during the landing roll, total drag increases. Overall, you can see how important brake drag is. If the brakes were to fail, or the landing surface is very slippery, then the loss of braking would cause the landing performance to massively deteriorate therefore increasing the landing distance.

LANDING DISTANCE FORMULA

Now we'll examine what determines the landing distance, and also what roles the four forces play. In order to do this, let's briefly detail the formula that is used to calculate the landing distance. Using Figure 5.5 you can see the landing distance formula. The letter "s" is the displacement or distance required to stop from a specified speed which is "V" with a given deceleration "d". Deceleration is force divided by mass. The force is aerodynamic drag, plus the braking co-efficient which is a function of wheel load, minus thrust, or in the case of reverse thrust, plus thrust.

$$s = \frac{1}{2} \frac{V^2}{d}$$

$$d = \frac{D_A + \mu (W - L) + T_R}{m}$$

Key:	S = Displacement	d = Acceleration	W = Weight	D _A = Aerodynamic Drag	m = Mass
	V = Speed	T _R = Thrust Reverse	L = Lift	μ = Coefficient of Friction	

Figure 5.5 The expanded landing distance formula

Expanding the formula in this manner allows you to see how a change in one of the variables has a knock on effect on the landing distance. We'll now analyse in detail all the factors that can affect the landing, with our principle concern being how these factors affect the landing distance.

EFFECT OF VARIABLE FACTORS ON LANDING DISTANCE

WEIGHT

The mass of the aeroplane affects:

- the stalling speed and hence V_{REF}
- the deceleration for a given decelerating force
- the wheel drag

Increased mass increases stalling speed, and reduces the deceleration for a given decelerating force, both effects increasing the landing distance. Increased mass increases the brake drag available (if not torque limited) and this decreases the landing distance. The net effect is that the landing distance will increase with increasing mass, but to a lesser degree than the increase of take-off distance with increasing mass.

DENSITY

The air density affects:

- the TAS for a given IAS
- the thrust or power of the engine

As thrust is small the main effect will be on the TAS. Low density (high temperature low pressure or high humidity) will give an increase in the landing distance due to the higher TAS, but again to a lesser degree than for the take-off distance.

WIND

You will recall the headwinds decrease the true ground of the aeroplane for any given indicated airspeed. Thus, during a headwind, the forward speed over the landing surface is much less and as a result the distance required to bring the aeroplane to rest is decreased.

A tailwind will have the opposite effect and it will increase the ground speed for a given indicated air speed. Thus, during a tailwind, the forward speed over the landing surface is much greater and as a result the distance required to bring the aeroplane to rest is increased.

When examining the effects that winds have on landing performance, it is recommended that you do not use the actual wind that is given just in case the wind changes to a worse condition than the one you have planned for.

When calculating actual landing distances, it is recommended that you assume only 50% of the headwind component, and 150% of the tailwind component. Most performance graphs that calculate the landing distance have the 50% headwind and 150% of recommendation already applied.

An important note is that there is no allowance for crosswinds and therefore no safety factor for crosswinds. Crosswinds present an additional complication because of the effect of potentially crossed controls which would have to be applied because the wind will tend to push the aeroplane off the centreline. These issues mean that aeroplanes are given maximum crosswind limits.

FLAP SETTING

Flaps are trailing edge devices used to increase the camber of the wing and generate more lift, thereby reducing the landing speed. However, the use of a lot of flap will dramatically increase aerodynamic drag as well. This is a benefit in landing and helps to slow the aeroplane down. Let's take a look at how different flap angles can affect the landing distance.

With no flap the aircraft will have a much faster approach speed, and have very little aerodynamic drag, therefore the landing distance will be large. However, with some flap selected, the approach speed is less, there will be more aerodynamic drag and consequently the landing distance will be smaller. However, with full flap, the approach speed is minimised and the aerodynamic drag is maximized. Therefore, the landing distance will be least compared to other flap settings. Having full flap selected for landing allows the aeroplane to maximize its landing mass. However, there is a disadvantage with having full flap if there was situation where the aeroplane needed to abort the landing and go-around for another attempt. You will recall that large flap angles greatly deteriorate the climb performance compared to no flaps. Therefore in a go-around, after the climb has been established, retract the flaps as soon as possible in the manner prescribed in the aeroplane flight manual.

RUNWAY SLOPE

The next factor that can affect the landing performance is the slope of the runway. Slope has an impact on the landing distance because of its affect on how the component of weight acts along the longitudinal axis of the aeroplane. When the aircraft is on an upslope, the weight still acts towards the centre of the earth, but there is a component of weight, which acts in the direction of drag, that is, backwards along the longitudinal axis. This will increase the deceleration of the aeroplane and therefore decrease the landing distance. Conversely when the aeroplane is on a down slope, the weight component now acts in the direction of thrust. This adds to the forward force, therefore it will decrease the deceleration and increase the landing distance.

A rough calculation to help quickly quantify the effect of slope is to assume that for every 1% slope, the landing distance is affected by 5%, or a factor of 1.05. The slope at some airfields means that the landing may only be possible in one direction. These are called unidirectional runways. Treat these runways with extra caution and always check that the current wind velocity will still allow a safe landing since you may be forced to land with a tailwind.

RUNWAY SURFACE

Most landing performance graphs assume a paved hard surface. If the condition of the runway is not like this, then the effect on the landing distance needs to be understood and corrections applied.

GRASS

A lot of small airfields have grass runways. The grass will increase the drag on the wheels. This is known as impingement drag and it will help to decelerate the aeroplane. However, grass severely reduces the wheel friction to the runway compared to a paved runway and therefore the wheel cannot be retarded efficiently by the brakes, otherwise the wheel will lock and the wheel friction with the runway will reduce even further.



Figure 5.6 An illustration showing that for the wheel to advance grass must be pushed out of the way

The overall effect is that grass runways will increase the landing distance. In light general aviation aeroplanes, this increase in landing distance is about 15% compared to a landing on paved surface. However, most landings that you will carry out throughout your professional career will undoubtedly be on hard paved runways.

CONTAMINATIONS

If the runway is covered, partially or fully by contaminants such as standing water, snow, slush or ice, then pay special attention to effect that they will have on the landing distance. These substances will have two main effects.

The first effect is that they will create impingement drag, much like grass did, but more importantly, the second effect is that these substances will substantially reduce the friction between the wheel and the runway. Therefore the wheel cannot be retarded efficiently by the brakes. As a result of the reduced friction and therefore the subsequent reduced braking action, any contamination of the runway due to water, snow, slush or ice will significantly increase the landing distance. You can see the effect of the various contaminations to the landing distance in Figure 5.7

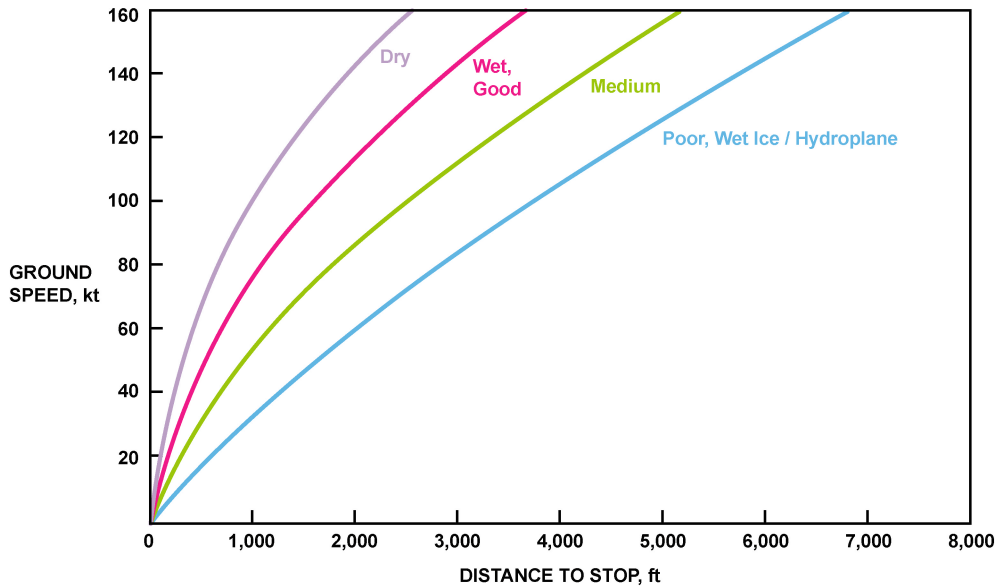


Figure 5.7 A graph showing the effect of contamination on the landing distance

Typically on the a dry runway the braking co-efficient of friction is between 0.8 to 1.0, but on wet, slippery or icy runways, the braking co-efficient of friction can fall to less than 0.2. Because of the lack of effective braking on slippery surfaces, the aerodynamic drag and reverse thrust become more important in bringing the aeroplane to a stop as shown in the diagram to the right. On flooded or icy runways, reverse thrust accounts for 80% of the deceleration force.

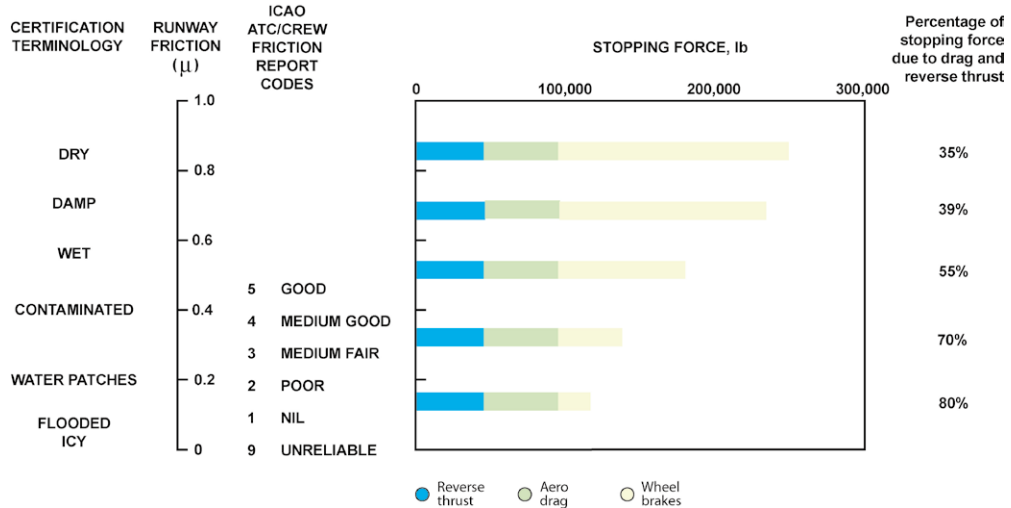


Figure 5.8 Various codes and terminology associated with runway contaminations

An important point to note is that there is a distinction between the definitions of a damp, wet or contaminated runway. A runway is considered to be damp when there is moisture present on the surface which changes its colour, but insufficient moisture to produce a reflective surface.

A wet runway is one whose moisture level makes the runway appear reflective, but there are no

areas of standing water in excess of 3mm deep. Wet runways can cause the average dry landing distance to increase by as much as than 50%.

A contaminated runway is one where more than 25% of the runway is covered in a layer of moisture, whose specific gravity is equivalent to a depth of 3mm or more of water. The importance of runway contamination cannot be stressed enough, as many fatal accidents may have been avoided had due account been taken of the situation.

From what you have learnt so far it is vital that the pilot be aware of the type of runway contamination, its depth, its extent, its effect on the braking and of course it's overall effect on the operation concerned, in this case, the landing. The information on the runway contamination and braking effect can be given to the pilot through a report. These reports are either by snowtam, runway state code PIREPS or spoken by air traffic control and may include braking action or braking co-efficient. Use any runway reports together with your aeroplane flight manual or standard operating procedure to best gauge the landing technique and landing performance.

HYDROPLANING

There are three principal types of aquaplaning or hydroplaning as it is now more commonly known.

DYNAMIC HYDROPLANING

The first is Dynamic hydroplaning. When an aircraft lands fast enough on a wet runway with at least 1/10 inch of standing water, inertial effects prevent water escaping from the footprint area, and the tyre is buoyed or held off the pavement by hydrodynamic force. Most people have experienced this type of hydroplaning when they have driven over a patch of water at high speed. The speed at which dynamic hydroplaning occurs is called VP. There is simple formula to help calculate the dynamic hydroplaning speed.

For rotating tires the dynamic hydroplaning speed in knots is equal to 9 times the square root of the tyre pressure in PSI. For a typical 737 the dynamic hydroplaning speed is between 90 and 120 knots.

However, for non rotating tires the dynamic hydroplaning speed is equal to 7.7 times the square root of the tyre pressure.

The danger from hydroplaning is the virtually nil braking and steering effect. The most positive methods of preventing this type of hydroplaning is to groove the tires, transversely groove the runway, ensure the runway pavement is convex from the centre line and ensure the runway has a macro-texture.

VISCOUS HYDROPLANING

The second type of hydroplaning is called viscous hydroplaning. It occurs because of the viscous properties of water acting like a lubricant. A thin film of fluid not more than 1/1000 of an inch deep cannot be penetrated by the tire in the footprint area and the tire rolls on top of the film. Viscous hydroplaning can occur at a much lower speed than dynamic hydroplaning, but it requires a smooth surface.

The most positive method of preventing this type of hydroplaning is to provide a micro-texture to the pavement surface which breaks up the film of water allowing it to collect into very small pockets. This means that the tyre footprint will sit on the peaks of the textured surface and not the film of water.

REVERTED RUBBER HYDROPLANING

Reverted rubber hydroplaning is a complex phenomenon which over the years has been the subject of a variety of explanations. Reverted rubber hydroplaning requires a prolonged, locked wheel skid, reverted rubber, and a wet runway surface. The locked wheels create enough heat to vaporize the underlying water film forming a cushion of steam that lifts the tire off the runway and eliminates tyre to surface contact. The steam heat reverts the rubber to a black gummy deposit on the runway. Once started, reverted rubber skidding will persist down to very low speeds, virtually until the aircraft comes to rest. During the skid there is no steering capability and the braking effect is almost nil. Reverted rubber hydroplaning is greatly reduced in modern aeroplanes due to the standardization of advanced anti skid braking systems which prevent wheel lock up.

LANDING TECHNIQUE ON SLIPPERY RUNWAYS

Detailed below is some advice and guidance to how to land on contaminated runways.

Firstly, check the current weather, and the runway conditions using the most accurate information possible. Once this has been done, completely re-assess the landing performance data to ensure satisfactory compliance to the regulations.

Ensure you are at V_{REF} at the landing screen height and prepare to land the aircraft in the touchdown zone within the 1,000 ft target of the airborne segment.

Land on the centre line with minimal lateral drift and without excess speed.

Arm auto spoilers and auto brakes as appropriate which assure prompt stopping effort after touchdown. For aeroplanes fitted with automatic anti skid brakes, the brakes will be applied above the dynamic hydroplaning speed, but for aeroplanes without this system, only apply the brakes below the dynamic hydroplaning speed.

The flare should lead to a firm touchdown, sometimes described as flying the aeroplane onto the runway. Positive landings will help place load on the wheels which will increase braking effectiveness and squeeze out the water from the tire foot print area.

Do not allow the airplane to float and do not attempt achieve a perfectly smooth touchdown. An extended flare will extend the touchdown point. Soft touchdowns will delay wheel spin up and delay oleo compression which is needed for auto brake and auto spoiler activation.

After main gear touchdown, do not hold the nose wheel off the runway. Smoothly fly the nose wheel onto the runway by relaxing aft control column pressure.

Deploy spoilers as soon as possible after touchdown or confirm auto spoiler deployment. If the aeroplane does not have auto brake then initiate braking once spoilers have been raised and nose wheel has contacted the runway.

Apply brakes smoothly and symmetrically.

Initiate reverse thrust as soon as possible after touchdown of the main wheels and target the rollout to stop well short of the end of the runway.

Leave a margin for unexpectedly low friction due to wet rubber deposits or hydroplaning.

MICROBURSTS AND WINDSHEAR

Of all the phases of flight it is the landing phase which is the most susceptible to severe weather conditions. The low altitude, low speed, low thrust settings and high drag during the landing phase mean that the aeroplane is at its most vulnerable. Landing when windshear is observed or forecast should be avoided, but if conditions are within limits, then landing at a higher speed should be used, but caution should be exercised since the higher landing speed will greatly increase the distance of the airborne section and ground roll of the landing.

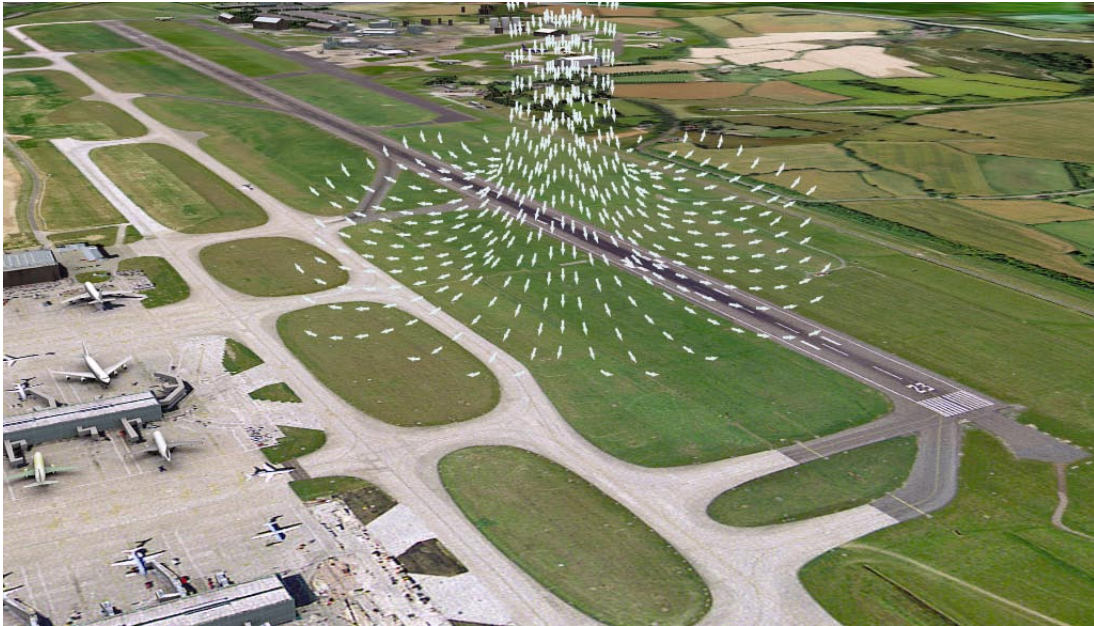


Figure 5.9 An illustration of a microburst at an airfield

The microburst is the single most hazardous weather phenomenon to aeroplanes close the ground. We briefly discussed the microburst phenomenon in the take-off section, but in landing it represents an even greater threat. However, there are certain clues which can give a pilot advance warning. The most obvious clue to a potential microburst are the tendrils of rain found beneath a storm cloud which are called virga or fallstreaks. Virga is precipitation falling but evaporating before it reaches the ground as shown here.

In the absence of specific guidance, here are some suggested techniques for identifying and dealing with a microburst encounter whilst on the approach to land. Using Figure 5.10 you can initially see that there will be an increase in airspeed and a rise above the approach path caused by the increasing headwind. On modern aeroplanes a windshear alert is usually given. This should be seen as the precursor to the microburst. Any hope of stabilized approach should be abandoned and a missed approach should be initiated. Without hesitation the power should be increased to go around power, the nose raised and the aeroplane flown in accordance with the missed approach procedure. Typically the nose attitude will be about 15° and the control column should be held against the buffet or stick shaker. The initial bonus of increased airspeed may now be rapidly eroded as the downdraught is encountered. Airspeed will fall and the aeroplane may start to descend despite high power and high pitch angle.

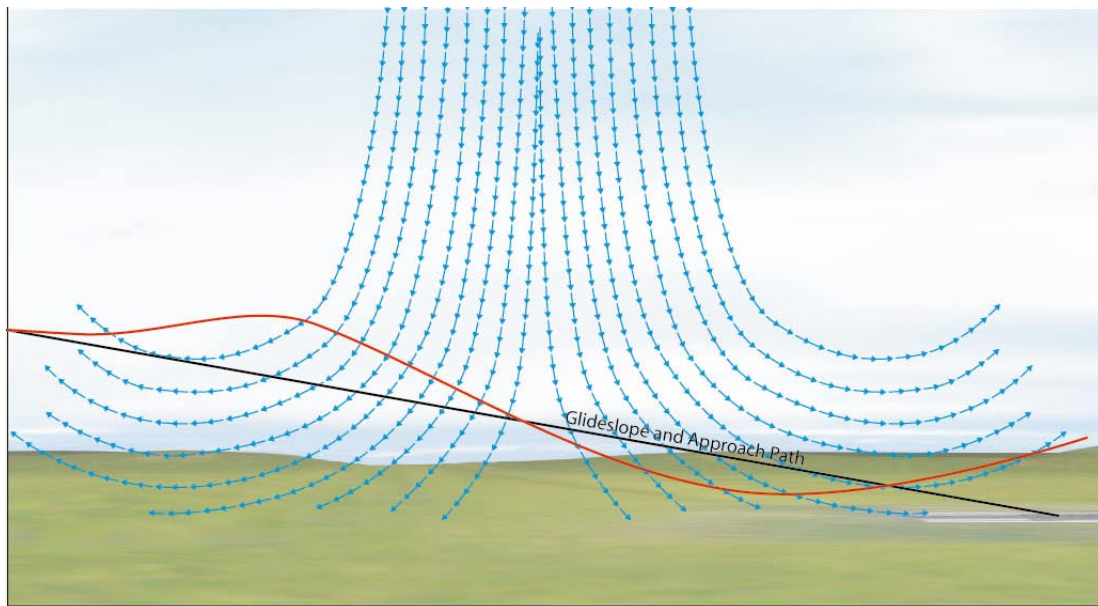


Figure 5.10 An illustration showing the flight path of a typical aeroplane on the approach to land during a microburst encounter

The point at which the tailwind starts to be encountered may be the most critical. The rate of descent may reduce, but the airspeed may continue to fall and any height loss may now break into obstacle clearance margins. Maximum thrust is now usually needed and the nose attitude kept high on the stall warning margins to escape the effects of the tailwind. Had the go-around not been initiated at the early warning stage, then it is highly unlikely that the aeroplane would survive the encounter. Because windshear, heavy rain, poor visibility, runway contamination and microbursts are hazards very closely associated with thunderstorms, it is advisable never to land with a thunderstorm at or in the immediate vicinity of the aerodrome. Delay the landing or consider diverting. There are too many cases to list of pilots who have attempted to land in bad weather and they have sadly perished along with many passengers. Most of these occurrences were avoidable had due account been made of the situation.

QUESTIONS

1. The landing reference speed V_{REF} has, in accordance with international requirements, the following margins above the stall speed in landing configuration for a Class B aeroplane:
 - a. 15%
 - b. 20%
 - c. 10%
 - d. 30%

2. At a given mass, the stalling speed of a twin engine, class B aeroplane is 100 kt in the landing configuration. The minimum speed a pilot must maintain in short final is:
 - a. 130 kt
 - b. 115 kt
 - c. 125 kt
 - d. 120 kt

3. The stalling speed or the minimum steady flight speed at which the aeroplane is controllable in landing configuration is abbreviated as:
 - a. VS1
 - b. VS
 - c. VMC
 - d. VSO

4. What margin above the stall speed is provided by the landing reference speed V_{REF} for a Class B aeroplane?
 - a. 1.10 VSO
 - b. VMCA \times 1.2
 - c. 1.30 VSO
 - d. 1.05 VSO

5. An increase in atmospheric pressure has, among other things, the following consequences on landing performance:
 - a. a reduced landing distance and degraded go around performance.
 - b. a reduced landing distance and improved go-around performance.
 - c. an increased landing distance and degraded go-around performance.
 - d. an increased landing distance and improved go-around performance.

6. The take-off distance of an aircraft is 600 m in a standard atmosphere, with no wind and at a pressure altitude of 0 ft. Using the following corrections:
- ± 20 m / 1,000 ft field elevation
 - 5 m / kt headwind
 - + 10 m / kt tail wind
 - ± 15 m / % runway slope
 - ± 5 m / °C deviation from standard temperature
- The take-off distance from an airport at 1,000 ft elevation, temperature 17°C, QNH 1013.25 hPa, 1% up-slope, 10 kt tailwind is?
- a. 555 m
 - b. 685 m
 - c. 755 m
 - d. 715 m
7. To minimize the risk of hydroplaning during the landing the pilot of a modern airliner should:
- a. make a "positive" landing and apply maximum reverse thrust and brakes as quickly as possible.
 - b. use maximum reverse thrust, and should start braking below the hydroplaning speed.
 - c. use normal landing, braking and reverse thrust techniques.
 - d. postpone the landing until the risk of hydroplaning no longer exists.
8. An aircraft has two certified landing flaps positions, 25° and 35°. If a pilot chooses 25° instead of 35°, the aircraft will have:
- a. a reduced landing distance and better go-around performance.
 - b. an increased landing distance and degraded go-around performance.
 - c. a reduced landing distance and degraded go-around performance.
 - d. an increased landing distance and better go-around performance.
9. May anti-skid be considered to determine the take-off and landing data?
- a. Only for take-off.
 - b. Only for landing.
 - c. Yes.
 - d. No.
10. An aircraft has two certified landing flaps positions, 25° and 35°. If a pilot chooses 35° instead of 25°, the aircraft will have:
- a. an increased landing distance and better go-around performance.
 - b. a reduced landing distance and degraded go-around performance.
 - c. a reduced landing distance and better go-around performance.
 - d. an increased landing distance and degraded go-around performance.

ANSWERS

1. D
2. A
3. D
4. C
5. B
6. C
7. A
8. D
9. C
10. B

CHAPTER SIX

SINGLE ENGINE CLASS B AIRCRAFT - TAKE OFF

Contents

PERFORMANCE CLASS B	281
GENERAL REQUIREMENTS (JAR - OPS 1.525)	281
TAKE-OFF DISTANCE (JAR 23.53)	281
TAKE-OFF REQUIREMENTS/ FIELD LENGTH REQUIREMENTS	282
FACTORS TO BE ACCOUNTED FOR.	283
SURFACE CONDITION FACTORS	284
PRESENTATION OF DATA.	285
CERTIFICATION REQUIREMENTS.	288
QUESTIONS	289
ANSWERS	292

PERFORMANCE CLASS B

Just to remind yourself, Class B single engine aeroplanes are propeller driven aeroplanes with a maximum approved passenger seating configuration of 9 or less, and a maximum take-off mass of 5,700 kg or less.

JAR 23 contains requirements for normal, utility, and aerobatic category aeroplanes, and also for commuter category aeroplanes.

A lot of the detail about the regulations for the various classes of aeroplanes can be found in CAP 698 which should have been issued to you by your training provider. Make sure you are aware of what CAP 698 gives you. Those bits of information that are included in this book and that are also found in CAP698 will be mentioned to make it easier for you to identify those areas which do not need to be committed to memory.

GENERAL REQUIREMENTS (JAR - OPS 1.525)

These requirements can be found in CAP 698 on page 1 of section 2 under paragraph 1.2. There are four general requirements about operating Class B single engine aeroplanes for commercial air transport purposes.

- The first is that this aeroplane shall not be operated at night.
- The second that the aeroplane must not be operated in Instrument Meteorological Conditions (IMC) except under special visual flight rules (SVFR).
- The third is that it must not be operated unless suitable surfaces are available en-route which permit a safe forced landing to be made should the engine failure occur at any point on the route.
- Lastly, that this type of aeroplane must not be operated above a cloud layer that extends below the relevant minimum safe altitude.

The reason why the latter regulation exists is quite easy to understand. If the engine were to fail during these conditions it would be almost impossible for a pilot to be able to see the landing surface and therefore impossible for the pilot to carry of a safe forced landing.

TAKE-OFF DISTANCE (JAR 23.53)

The gross take-off distance for Class B aeroplanes (other than those in the commuter category) is the distance from the start of take-off to a screen height of 50 ft above the take-off surface, with take-off power set, rotating at V_R and achieving the specified speed at the screen.

The rotation speed V_R must not be less than V_{S1}

The take-off safety speed (screen height speed) must be not less than the greater of:

- a speed that is safe under all reasonably expected conditions
- or
- $1.2 V_{S1}$

TAKE-OFF REQUIREMENTS/ FIELD LENGTH REQUIREMENTS

There is only one take-off requirement for single engine Class B aeroplanes. The requirement is that the mass of the aeroplane must be such that the take-off can be completed within the available distances. In other words the take-off must be complete within the field length available. This requirement is called the "Field Length Requirement".

The Field Length Requirements are detailed below and you can find them in CAP 698 under paragraph 2.1.1 of page 1 and 2 of section 2.

- When no stopway or clearway is available, the take-off distance when multiplied by 1.25 must not exceed TORA (Gross TOD x 1.25 must not exceed the TORA)
- When a stopway and/or clearway is available the take-off distance must:
 - not exceed TORA (Gross TOD must not exceed the TORA)
 - when multiplied by 1.3, not exceed ASDA (Gross TOD x 1.3 must not exceed the ASDA)
 - when multiplied by 1.15, not exceed TODA (Gross TOD x 1.15 must not exceed the TODA)

To understand these requirements it might be easier to work through an example.

EXAMPLE: Let us assume that the aeroplane flight manual gives the take-off distance as 3000ft and that there is no stopway or clearway available at the airport. What is the net take-off distance or the minimum length or TORA?

In this case we must satisfy the requirement that "when no stopway or clearway is available, the take-off distance when multiplied by 1.25 must not exceed TORA (Gross TOD x 1.25 must not exceed the TORA)"

To carry out the calculation, multiply 3000 ft by 1.25 gives us a value of 3750 ft. Essentially this means that the runway must be at least 3750 ft long, or, more correctly, the take off run available (TORA) must be at least 3750 ft long.

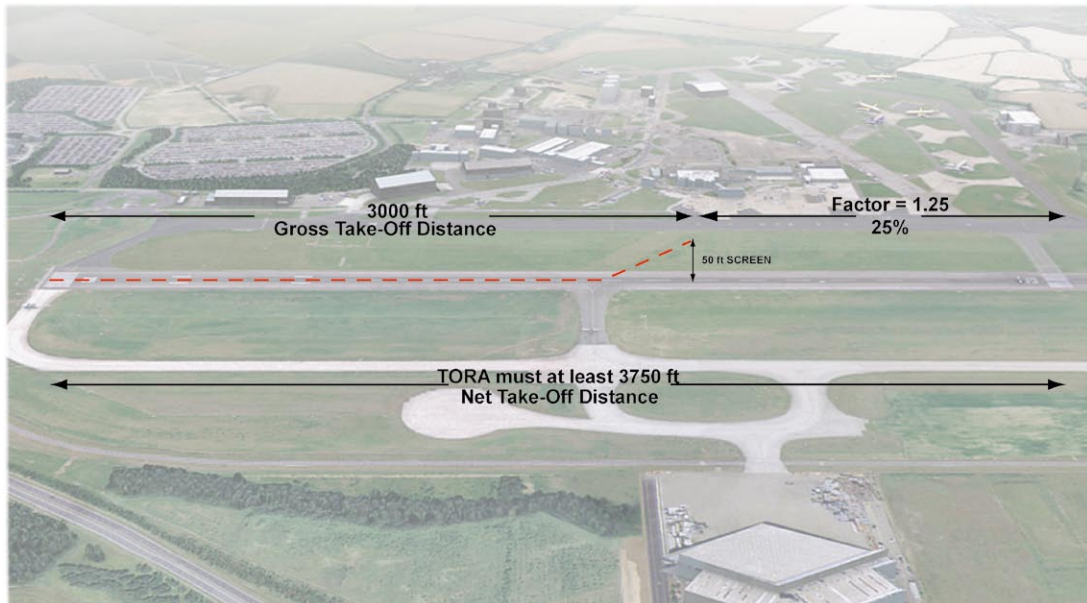


Figure 6.1 The Gross take-off distance multiplied by 1.25 must not exceed the TORA

This rule ensures that once the aeroplane has completed the take-off, that is, at the screen height, there should be at least 25% of the runway remaining. Therefore the regulation requirement provides an adequate safety margin for the take-off. We discussed these safety concerns during the lesson on performance standards. To interpret the regulation, although the actual take-off distance is 3000 ft, the authorities are suggesting the worst case in a million would be a take-off that is 3750 ft long. This helps us again to see the difference between net and gross performance. Here the gross performance for the take-off is 3000 ft but the net performance, which is always worse performance, is 3750 ft.

FACTORS TO BE ACCOUNTED FOR

The regulations in CS-23 state that when calculating the gross take-off distance, in other words, before we add the factors mentioned previously, certain details must be accounted for. These are listed below.

The gross take-off distance required shall take account of:

- the mass of the aeroplane at the start of the take-off run
- the pressure altitude at the aerodrome
- the ambient temperature at the aerodrome
- the runway surface conditions and the type of runway surface
- the runway slope
- not more than 50% of the reported headwind component or not less than 150% of the reported tailwind component

SURFACE CONDITION FACTORS

Concentrating on point d) and e) from above the regulations stipulate that due account must be made of the runway condition. Most performance data in the aeroplane flight manual assumes a level, dry and hard runway. Therefore, correction factors must be applied to the gross take-off distance when the runway conditions are different. There are various correction factors such as for grass runways, wet runways and runways which are sloped. These factors are detailed next.

At the top of page 2 section 2 under section c) in CAP 698 it states that if the runway is other than dry and paved the following correction factors must be used when determining the take-off distance. These are shown for you in figure 6.2

Surface Type	Condition	Factor
Grass (on firm soil) up to 20 cm Long	Dry	x 1.2
	Wet	x 1.3
Paved	Wet	x 1.0

Figure 6.2 The corrections factors that need to be applied to the gross take-off distance when the runway is other than dry, paved and level.

As you have learnt already, grass runways will increase the take-off distance compared to paved runways. Here the factor to use to account for the effect of dry grass is 1.2 and 1.3 if the grass is wet.

At the top of page 2 section 2 underneath the table, point “d” details the corrections to be applied if there is a slope to the runway. It states that a pilot must increase the take-off distance by 5%, or by a factor of 1.05, for ever 1% upslope. However, it also states that “no factorisation is permitted for downslope”. In other words, when an aeroplane may be taking-off on a downwards sloping runway no correction factor is to be applied for the downslope. The reason for ignoring the downslope is because a downslope will decrease the take-off distance. This helps to add a little extra safety to the take-off distance calculation.

PRESENTATION OF DATA

The take-off distance required is usually presented in graphical form. You can see such a graph by looking at figure 2.1 on page 3 of section 2 in CAP 698. Firstly, the title of the graph indicates that the graph is for calculating the gross take-off distance with no flaps selected. For other flap settings you may have to consult another graph.

Take a look at the associated conditions paying particular notice to the power and flap settings as shown here. Also notice that this graph assumes a runway that is paved, level and dry. If the runway conditions required for a given calculation are different, then corrections will need to be made to the values this graph will give. We briefly saw these correction factors earlier. Notice a small box in the middle of the graph which highlights the rotation and screen height speeds for different weights. A pilot must adhere to these accurately because they are the speeds which have been used to construct this graph. If a pilot were to deviate from these speeds, the required aircraft performance would not be achieved.

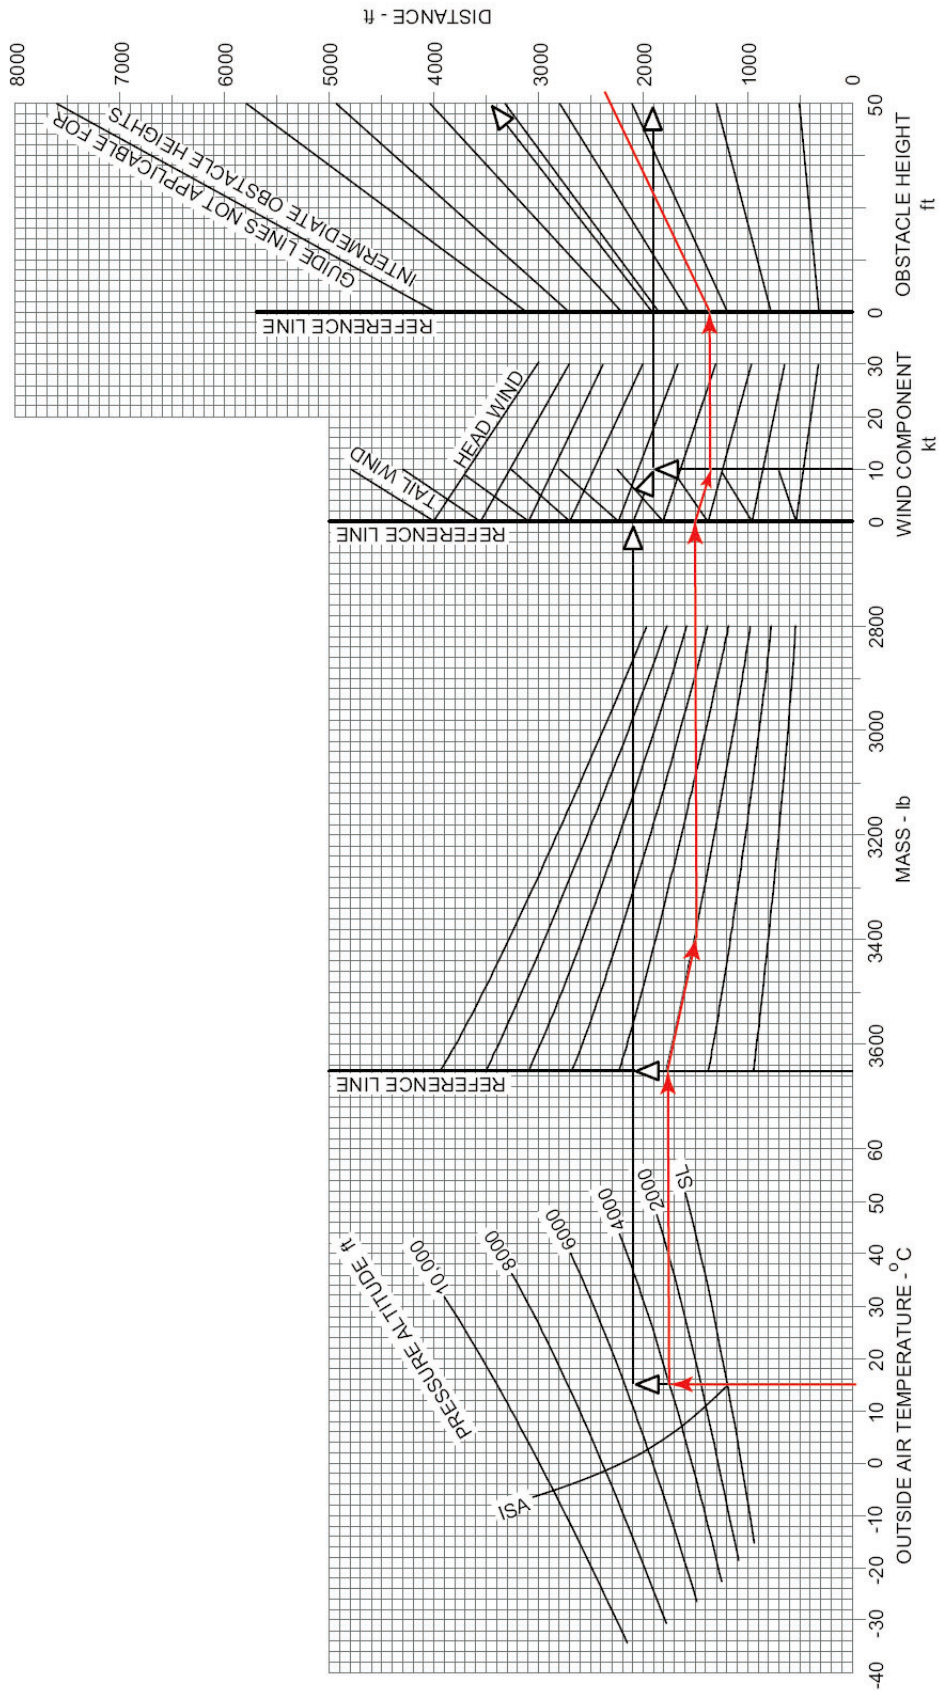


Figure 6.3 An example take-off distance calculation

Having looked at the various bits of information around the graphs let's now examine the graph itself. The left hand carpet of the graph involves the variations of temperature and pressure altitude. This part of the graph accounts for the effect of air density on the take-off distance. The middle carpet accounts for the effect of the mass and to the right of this carpet is the wind correction carpet. Notice the differences in the slope of the headwind and tailwind lines. This means the 150% and 50% wind rules have been applied. The last carpet on the far right of the graph is labelled "obstacle height". Although there is no "obstacle" as such at the end of the take-off run, you will recall that the take-off is not complete until a screen height of 50 ft is reached.

Using an example we will work through the graph so that you are able to see how the take-off distance is calculated. For this example, follow through the red line in figure 6.3.

In the example we will assume a temperature of 15°C at a given airfield 4000ft above mean sea level. To use the graph then, move upwards from 15°C until you have reached the 4000ft pressure altitude line. Then move right until you meet the first reference line. The next variable is mass; in our example let us assume a mass of 3400 lbs. From the reference line we must move down along the sloping guidelines until we reach 3400 lbs as shown here.

From this point we go horizontally to the right until the next reference line. The next variable is wind.

In our example we will assume a 10 knot headwind. Notice though that the slopes of the headwind and tailwind lines are different. We therefore recognise that the 150% tailwind and 50% headwind rules that you learnt about in the general principles for take-off lesson have already been applied. Travel down the headwind line until you reach 10 knots headwind and then move horizontally right once more, up to the last reference line. Remember that the take off is not complete until the aeroplane has reached the 50ft screen height, so from this point on the graph we must move up the guidelines to the end. The take off distance in our example, then, is approximately 2300ft from brake release to the 50ft screen.

However, let us now assume that the runway has a grass surface and that the grass is wet. Remember that both these variables cause an increase in the take off distance. Since the graph assumes a paved dry runway we will have to make a correction to the take off distance for the different conditions. You may recall that wet grass increases the distance by 30% or by a factor of 1.3. Our calculated take off distance was 2300ft, but correcting it for wet grass would now make the take off distance 2990ft.

Let us now assume the runway has an upslope of 1%. You may recall this would increase the take off distance by 5% or by a factor of 1.05.

This now makes the total gross take off distance 3140ft. To comply with the field length requirements and to obtain a net take-off distance, you may recall that the take-off distance must be compared to the available distances at the airfield to ensure it does not exceed the limits laid down by the authorities. To remind you of these regulations turn to page 1 section 2 in the CAP 698.

CERTIFICATION REQUIREMENTS

The last part of the lesson will focus on some of the certification specifications for single engine class B aeroplanes. These can be found in the document from EASA called CS 23. There are only two main specifications that apply to the take-off phase of flight and these specifications concern the take-off speeds.

The first of these certification specifications concerns V_R . You may recall that V_R is the speed at which the pilot makes a control input with the intention of getting the aeroplane out of contact with the runway.

The certification specifications state that for the single engine aeroplane, the speed V_R must not be less than V_{S1} . V_{S1} being the stall speed or the minimum steady flight speed of the aeroplane obtained in a specified configuration. The configuration concerned is that configuration used for the take-off.

The second of the certification specification concerns the speed of the aeroplane at the screen height. The specifications state that the speed at 15m or 50ft above the take-off surface must be more than the higher of a speed that is safe under all reasonably expected conditions, or $1.2 V_{S1}$. You will recall from an earlier lesson that the speed that must be attained at the screen height is commonly referred to as the take-off safety speed.

The certification regulations about V_R and the take-off safety speed are not found in the CAP 698 and therefore must be committed to memory.

QUESTIONS

1. For a single engine Class B aeroplane, how does runway slope affect allowable take-off mass, assuming other factors remain constant and not limiting?
 - a. An uphill slope decreases take-off mass.
 - b. Allowable take-off mass is not affected by runway slope.
 - c. A downhill slope decreases allowable take-off mass.
 - d. A downhill slope increases allowable take-off mass.

2. For this question use Performance Manual CAP 698 SEP 1 Figure 2.1. With regard to the take-off performance chart for the single engine aeroplane, determine the take-off speed for (1) rotation and (2) at a height of 50 ft.

Given:-

O.A.T : ISA + 10
Pressure Altitude: 5,000 ft
Aeroplane mass: 3,400 lbs
Headwind component: 5 kt
Flaps: up
Runway: Tarred and Dry

- a. 73 and 84 kt
 - b. 68 and 78 kt
 - c. 65 and 75 kt
 - d. 71 and 82 kt
3. For this question use Performance Manual CAP 698 SEP 1 Figure 2.2. With regard to the take-off performance chart for the single engine aeroplane determine the take-off distance over a 50 ft obstacle height.

Given:-

O.A.T : 30°C
Pressure Altitude: 1,000 ft
Aeroplane Mass: 2,950 lbs
Tailwind component: 5 kt
Flaps: Approach setting
Runway: Short, wet grass, firm subsoil
Correction factor: 1.25 for the current runway conditions

- a. 1,700 ft
 - b. 2,500 ft
 - c. 2,200 ft
 - d. 1,900 ft

4. For this question use Performance Manual CAP 698 SEP 1 Figure 2.1. With regard to the take off performance chart for the single engine aeroplane determine the maximum allowable take off mass.

Given:-

O.A.T : ISA
Pressure Altitude: 4,000 ft
Headwind component: 5 kt
Flaps: up
Runway: Tarred and Dry
Factored runway length: 2,000 ft
Obstacle height: 50 ft

- a. 3,000 lbs
b. 2,900 lbs
c. 3,650 lbs
d. 3,200 lbs
5. For this question use Performance Manual CAP 698 SEP 1 Figure 2.1. With regard to the take-off performance chart for the single engine aeroplane determine the take-off distance to a height of 50 ft.

Given:-

O.A.T : 30°C
Pressure Altitude: 1,000 ft
Aeroplane Mass: 3,450 lbs
Tailwind component: 2.5 kt
Flaps: up
Runway: Tarred and Dry

- a. approximately : 2,200 feet
b. approximately : 2,400 feet
c. approximately : 1,400 feet
d. approximately : 2,800 feet
6. For this question use Performance Manual CAP 698 SEP 1 Figure 2.2. With regard to the take-off performance chart for the single engine aeroplane determine the take-off distance to a height of 50 ft.

Given:-

O.A.T : -7°C
Pressure Altitude: 7,000 ft
Aeroplane Mass: 2,950 lbs
Headwind component: 5 kt
Flaps: Approach setting
Runway: Tarred and Dry

- a. approximately : 1,150 ft
b. approximately : 2,450 ft
c. approximately : 1,500 ft
d. approximately : 2,100 ft

7. For this question use Performance Manual CAP 698 SEP 1 Figure 2.1. With regard to the take-off performance chart for the single engine aeroplane determine the take-off distance to a height of 50 ft.

Given:-

Airport characteristics: hard, dry and zero slope runway
Pressure altitude: 1,500 ft
Outside air temperature: +18°C
wind component: 4 knots tailwind
Take-off mass : 1,270 kg

- a. 520 m
b. 415 m
c. 440 m
d. 615 m
8. For this question use Performance Manual CAP 698 SEP 1 Figure 2.2. With regard to the take-off performance chart for the single engine aeroplane determine the take-off distance to a height of 50 ft.

Given:-

O.A.T : 38°C
Pressure Altitude: 4,000 ft
Aeroplane Mass: 3,400 lbs
Tailwind component: 5 kt
Flaps: Approach setting
Runway: Dry Grass
Correction factor: 1.2

- a. approximately : 3,250 ft
b. approximately : 4,200 ft
c. approximately : 5,040 ft
d. approximately : 3,900 ft
9. For a Class B aircraft at an aerodrome with no stopway or clearway, the minimum length of Take-off Run that must be available to satisfy the take-off requirements:
- a. Must not be less than the gross take off distance to 50ft.
b. Must not be less than 1.15 times the gross take off distance to 50ft.
c. Must not be less than 1.25 times the gross take off distance to 50ft.
d. Must not be less than 1.3 times the gross take off distance to 50ft.
10. For a single engine Class B aircraft, the rotation speed VR:
- a. Must not be less than 1.1 VS1
b. Must not be less than VS1
c. Must not be less than 1.2 VMC
d. Must not be less than VMC
11. For a single engine Class B aircraft at an aerodrome with stopway:
- a. The TOD x 1.3 must not exceed the ASDA.
b. The TOD must not exceed the ASDA x 1.3.
c. The TOD x 1.25 must not exceed the ASDA.
d. The TOD must not exceed the ASDA x 1.25.

ANSWERS

1. A
2. D
3. C
4. D
5. B
6. D
7. A
8. D
9. C
10. B
11. A

CHAPTER SEVEN
SINGLE ENGINE CLASS B - CLIMB

Contents

CLIMB PERFORMANCE	295
PRESENTATION OF DATA.	295
USE OF THE CLIMB GRAPH DATA	296
EXAMPLES IN CAP 698.	296
QUESTIONS	297
ANSWERS	298

CLIMB PERFORMANCE

In this lesson we will concentrate on the regulatory requirements for the class B single engine aeroplane in the climb. These regulations are only applicable to operating the single engine aeroplane in the commercial air transport category.

The take-off climb requirements for class b single engine aeroplanes are stated in CS-OPS 1, but, again, as for the take-off requirements, the climb regulations can be found in the CAP 698, on page 6 of section 2. At the top of the page 6 of section 2 under point 3.1 we read that there are no obstacle clearance limits, or minimum acceptable climb gradients. Let us break down the two elements in this statement.

Firstly, the regulations are saying that there is no requirement for a single engine class B aeroplane to demonstrate that it can clear an obstacle within the take-off flight path. However, other classes of aeroplane have to demonstrate that obstacles within the take-off flight path can be cleared by a set limit of 50 feet or 35 feet. It seems strange, then, that there is no regulatory requirement for obstacle clearance in the case of a single engine Class B aeroplane. But, surely the idea of the regulations is to enforce a safety margin. What must be understood here, though, is that the pilot of a Class B single engine aeroplane must, at all times, have visual contact with the ground. Consequently the pilot will at all times be able to identify the obstacle within the take-off path and, therefore, avoid it. However, you may judge that it would still be prudent to carry out an obstacle clearance calculation if there were known obstacle in the take-off flight path.

The second part of the regulation states that there is no minimum acceptable climb gradient for a single engine class B aeroplane. Again, this seems strange; the idea of the operational regulations is to enforce a safety margin. However, the reason why there is no operational regulation on the climb performance is that the certification specifications for this type of aeroplane, as stated in CS-23, are stringent enough on their own.

Even though there is no operational requirement for a minimum climb performance, it would not be safe to operate the aeroplane in such a manner that its performance is so poor it is barely able to climb. Therefore, it is important as a pilot operating this class and type of aeroplane to know what climb performance would be achieved so that the aeroplane will at least be able to climb sufficiently.

PRESENTATION OF DATA

Provided in most pilot operating manuals or aeroplane flight manuals are climb graphs that help the pilot to calculate the gradient of climb. Such a graph can be found in CAP 698 in section 2 page 7 figure 2.3. As with all graphs, before you use it, ensure you are familiar with the associated conditions of that graph. In this graph the throttles are at maximum, mixture is rich, flaps and gear are up and the cowl flaps set as required. The climb speed for the graph is taken to be 100 knots indicated airspeed for all masses.

The graph has an example that you can follow using the dashed black lines so that you can practice on your own. Graph accuracy is very important so try and be as careful as possible when using them. Be especially careful when working out your true air speed which is needed when you approach the right hand side of the graph. You may need your navigation computer to do this as it might not be given to you, such as the case in the example.

USE OF THE CLIMB GRAPH DATA

There will be two main uses of the climb graph. The first main use of the graph is to calculate the time to climb to the cruise altitude. For this, the pilot would need to know the cruise altitude and the rate of climb. However, if the gradient from this graph is used for the calculation of obstacle clearance or the ground distance, then the gradient must be adjusted for the effect of wind. This particular climb graph makes no correction for wind. The reason why the gradient must be corrected for wind is because obstacle clearance calculations or ground distance calculations use ground gradients, that is gradients measured relative to the ground and ground gradients are affected by wind.

If you need to refresh your memory on the difference between ground gradients and air gradients and the effects of wind, then go back to the general performance principles climb chapter.

EXAMPLES IN CAP 698

There are some example calculations in CAP 698 for you to work through and practise. For example, on page 6 section 2 there is an example on how to calculate the climb gradient using the graph. Just below this, there is another example to determine what the maximum permissible mass is in order to achieve a 4% climb gradient. This maximum permissible mass is sometimes referred to as the MAT or WAT limit.

On page 8 of section 2 is another example. This is an example of how to calculate the horizontal ground distance required to climb to a given height.

QUESTIONS

1. For this question use Performance Manual CAP 698 SEP 1 Figure 2.3. Using the climb performance chart, for the single engine aeroplane, determine the rate of climb and the gradient of climb in the following conditions:

Given:-

O.A.T at Take-off: ISA
Airport pressure altitude: 3,000 ft
Aeroplane mass: 3,450 lbs
Speed: 100 KIAS

- a. 1,310 ft/min and 11.3%
 - b. 1,130 ft/min and 10.6%
 - c. 1,030 ft/min and 8.4%
 - d. 1,140 ft/min and 11.1%
2. For this question use Performance Manual CAP 698 SEP 1 Figure 2.3. Using the climb performance chart, for the single engine aeroplane, determine the ground distance to reach a height of 1,500 ft in the following conditions:

Given:-

O.A.T at Take-off: ISA
Airport pressure altitude: 5,000 ft
Aeroplane mass: 3,300 lbs
Speed: 100 KIAS
Wind component: 5 kts Tailwind

- a. 19,250 ft
 - b. 14,275 ft
 - c. 14,925 ft
 - d. 15,625 ft
3. For this question use Performance Manual CAP 698 SEP 1 Figure 2.3. With regard to the climb performance chart for the single engine aeroplane determine the climb speed (ft/min).

Given:-

O.A.T : ISA + 15°C
Pressure Altitude: 0 ft
Aeroplane Mass: 3,400 lbs
Flaps: up
Speed: 100 KIAS

- a. 1150 ft/min
- b. 1290 ft/min
- c. 1370 ft/min
- d. 1210 ft/min

4. For this question use Performance Manual CAP 698 SEP 1 Figure 2.3. Using the climb performance chart, for the single engine aeroplane, determine the ground distance to reach a height of 2,000 ft in the following conditions:

Given:-

O.A.T. at take-off: 25°C
Airport pressure altitude: 1,000 ft
Aeroplane mass: 3,600 lbs
Speed: 100 KIAS
Wind component: 15 kts Headwind

- a. 15,290 ft
- b. 18,750 ft
- c. 16,410 ft
- d. 16,050 ft

ANSWERS

1. B 2. D 3. B 4. D

CHAPTER EIGHT

SINGLE ENGINE CLASS B - EN-ROUTE AND DESCENT

Contents

EN-ROUTE SECTION	301
EN-ROUTE AND DESCENT REQUIREMENTS	301
INFORMATION IN CAP 698	305
TYPICAL RANGE AND ENDURANCE GRAPHS.	306
QUESTIONS	308
ANSWERS	310

EN-ROUTE SECTION

This chapter will focus on the Class B single engine performance requirements for the en-route and descent stage of flight.

Essentially the en-route part of the flight is considered to be from 1500 ft above the airfield from which the aeroplane has taken off to 1000 ft above the destination airfield. Although the CAP 698 manual does show the en-route performance requirements these requirements are scattered through the document, which does not make for ease of reference.

EN-ROUTE AND DESCENT REQUIREMENTS

JAR-OPS 1 states that “an operator must ensure that the aeroplane, in the meteorological conditions expected for the flight, and in the event of engine failure, is capable of reaching a place at which a safe forced landing can be made.” In order to be able to comply with the rule, an operator has to know certain details about the route to be flown and the performance of the aeroplane. First of all, of course, for any given route, an operator must know the safe forced landing areas. The next detail that the operator needs to know is whether his aeroplane will be able to reach these areas if the engine were to fail while en-route. Whether or not this is possible will depend on two things;

- the altitude chosen for the flight
- the descent gradient of the aeroplane following engine failure.

If these two parameters are known, it is possible to calculate how far the aeroplane will travel following engine failure. So, let us work through an actual example.

Let us assume a cruise altitude of 10,000 feet and a gradient of descent of 7% following an engine failure. What is the descent range?

We can work out the horizontal distance travelled or descent range by taking the height of the aeroplane above the ground dividing this by the gradient and then multiplying by 100.

Horizontal Distance = Vertical/Gradient X 100

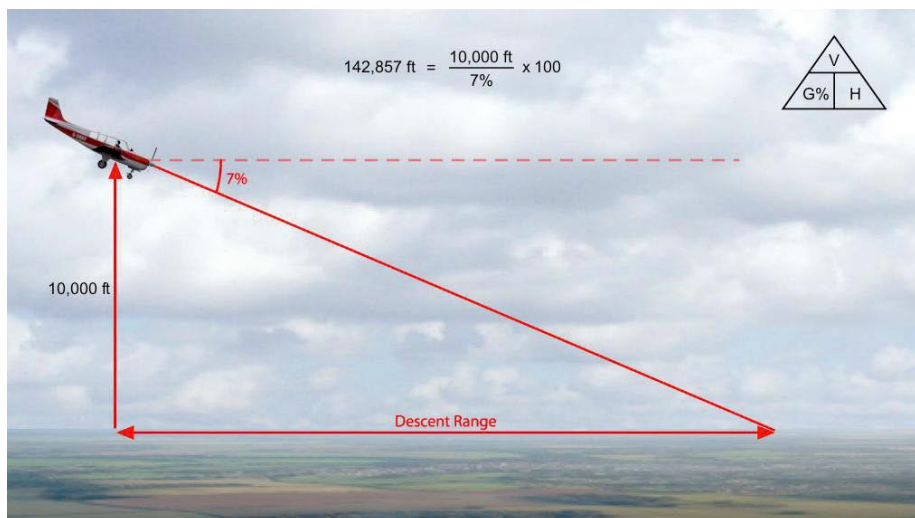


Figure 8.1 An illustration showing an example descent range calculation

In this case we see that in still air the aeroplane will cover in the glide a horizontal distance of 142,857ft or roughly 23.5 nm following engine failure. This means that the aeroplane must not pass further away than 23.5 nm from any safe forced landing locations. So then draw a circle of 23.5 nm radius, around each of the safe forced landing locations (the yellow dots) as you can see in figure 8.2. Then draw a track line from Airfield A to Airfield B that is within each circle. If the flight track falls outside of the circles then, following engine failure the aeroplane will not make it to a safe forced landing area.

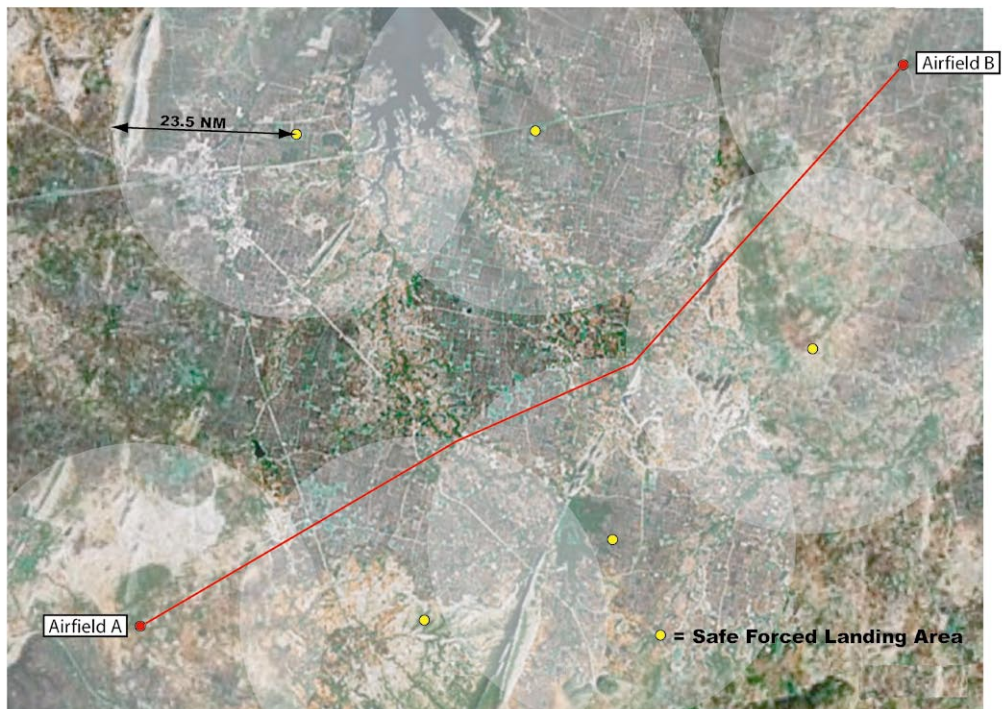


Figure 8.2 An illustration showing the glide descent range around each forced landing area and the subsequent track that is required to remain with glide range of each field.

If the aeroplane were to operate at a higher altitude, then it would be able to cover a greater distance in the glide following an engine failure. For example, operating at 15,000 ft instead of 10,000ft would increase the aeroplanes still air glide range to 35 nautical miles. Therefore the circles around each forced landing location will grow as shown in figure 8.3.

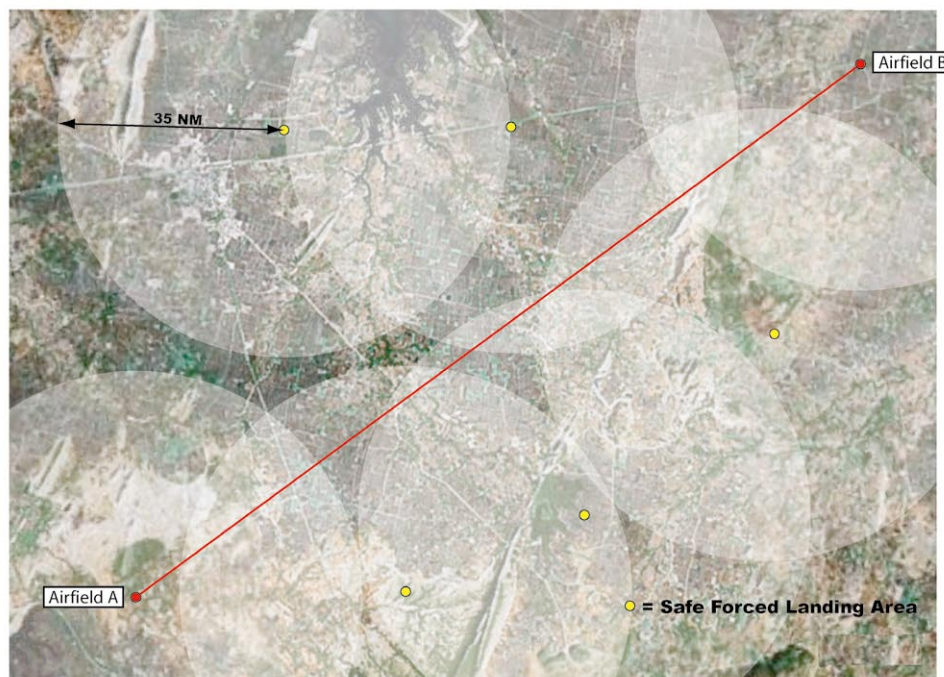


Figure 8.3 An illustration showing the glide descent range around each forced landing area and the subsequent track that is required to remain with glide range of each field.

Notice that now that the aeroplane can fly along a straight track to airfield B because at all times throughout the flight, the aeroplane is within glide range of a suitable forced landing location. Consequently, small piston engine aeroplanes should be flown at their maximum altitudes so that direct routes can be achieved. However, when planning the altitude, another regulation must be borne in mind.

JAR-OPS 1 states, that when complying with the safe forced landing rule the aeroplane must not be assumed to be flying, with the engine operating at maximum continuous power at an altitude exceeding that at which the aeroplane's rate of climb equals 300 feet per minute. What this rule effectively does, is to limit the maximum altitude that can be used in order to comply with the forced landing rule. An aeroplane may operate at higher altitude than this regulation prescribes but the operator may not use the higher altitude in his calculation of glide range to a safe landing area.

There is one last detail to be considered about complying with the forced landing rule. JAR-OPS 1 states, that in order to comply with the safe forced landing rule the assumed en-route gradient shall be the gross gradient of descent, increased by a gradient of 0.5%. In our example we had a gradient of descent of 7%, unfortunately though, as we have seen, the regulations do not permit this gradient to be used in our calculation. The gradient must be increased by 0.5% to 7.5% as shown in figure 8.4

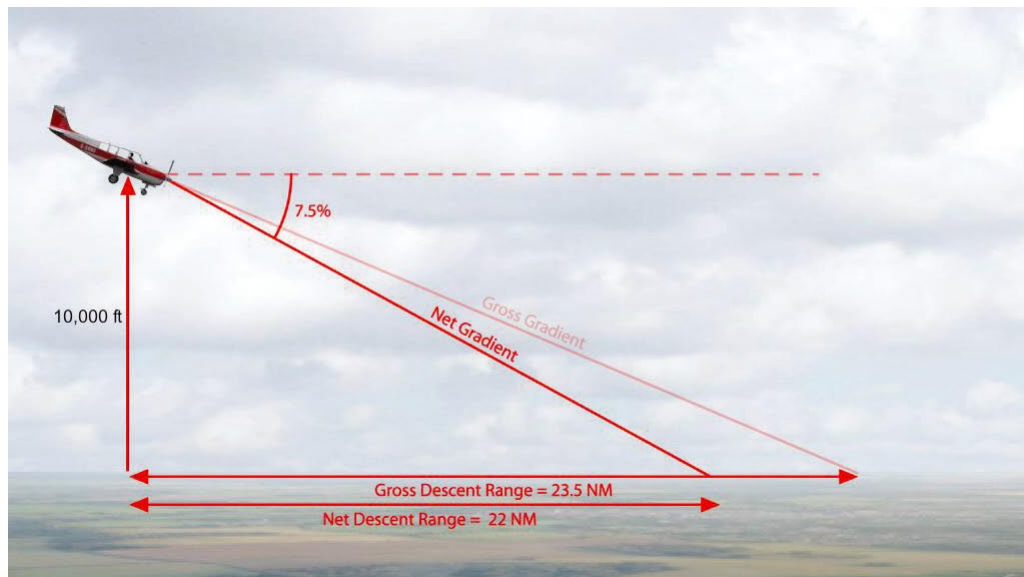


Figure 8.4 An illustration showing an example descent range calculation

This will lower the assumed descent performance of the aeroplane. The new deteriorated gradient that the regulations insist that we use is called the net gradient, and in our case this is 7.5%.

If this net gradient has to be used the glide distance will reduce to 22 nm. So, although the aeroplane may achieve 23.5 nm following an engine failure, it must be assumed to glide only 22 nautical miles.

Looking at figure 8.5, this means that the circles around each safe landing area must reduce to a radius of 22 nm.

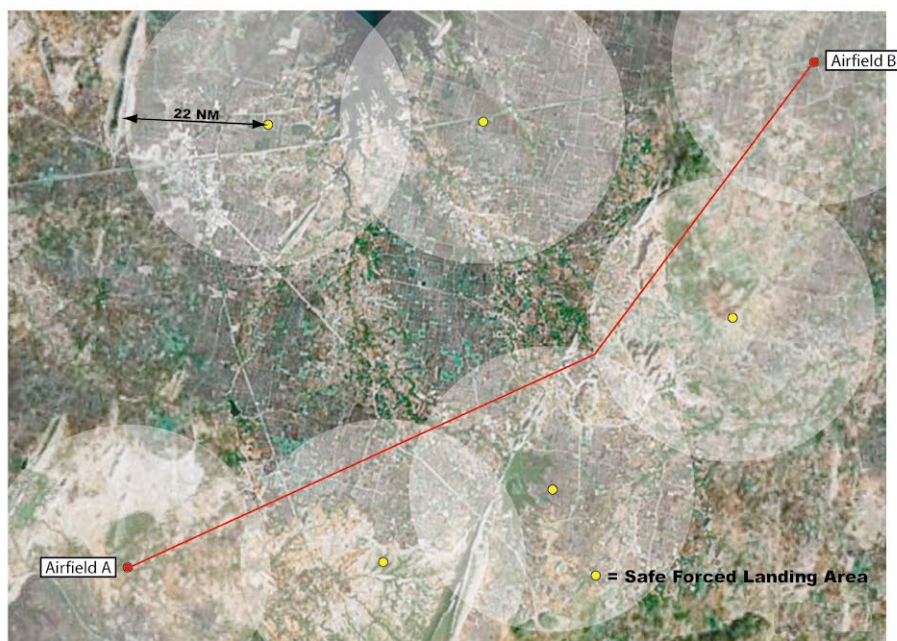


Figure 8.5 An illustration showing the net track that is required to remain with net glide range of each safe forced landing area

Thus the planned track will have to change slightly so that at all points along the route the aeroplane is no further than 22 nm from a safe forced landing area. The track shown in figure 8.5 meets the entire set of requirements as stated in JAR-OPS 1.

INFORMATION IN CAP 698

It was mentioned at the beginning of the chapter that CAP 698 has the en-route regulations in it for you, but that they were scattered through the manual and not conveniently collected in one place.

On page 1 of section 2 in the general requirement paragraph, point c) is the regulation about ensuring that the aeroplane is not operated unless surfaces are available which permit a safe force landing to be carried out in the event of engine failure. However, the other regulations about complying with this rule are a few pages further on you will find the remaining en-route requirements.

At the bottom of page 8 of section 2. The first part of the regulations to be found here, states that the aeroplane may not be assumed to be flying above the altitude at which a rate of climb of 300 feet per minute can be achieved. Underneath that rule you can see the requirement which states that the net gradient of descent, in the event of engine failure, is the gross gradient + 0.5%.

Although the concepts of range and endurance have been covered in a previous lesson, it is important for the pilot to be able to use the information in the aeroplane flight manual so that he may calculate the range and endurance of the aeroplane. In the aircraft manual there are graphs and tables which help you calculate the endurance and range of your aeroplane under various conditions.

TYPICAL RANGE AND ENDURANCE GRAPHS

Shown in figure 8.6 is a typical endurance graph for a light single engine class B aeroplane. As an example let us assume a cruise altitude of 7000ft with an outside air temperature of 7°C at 65% power. Working through the graph hopefully you see that the endurance of the aircraft allowing 45 minutes of reserve fuel is 6.6 hours, or 7.4 hours allowing for no reserves.

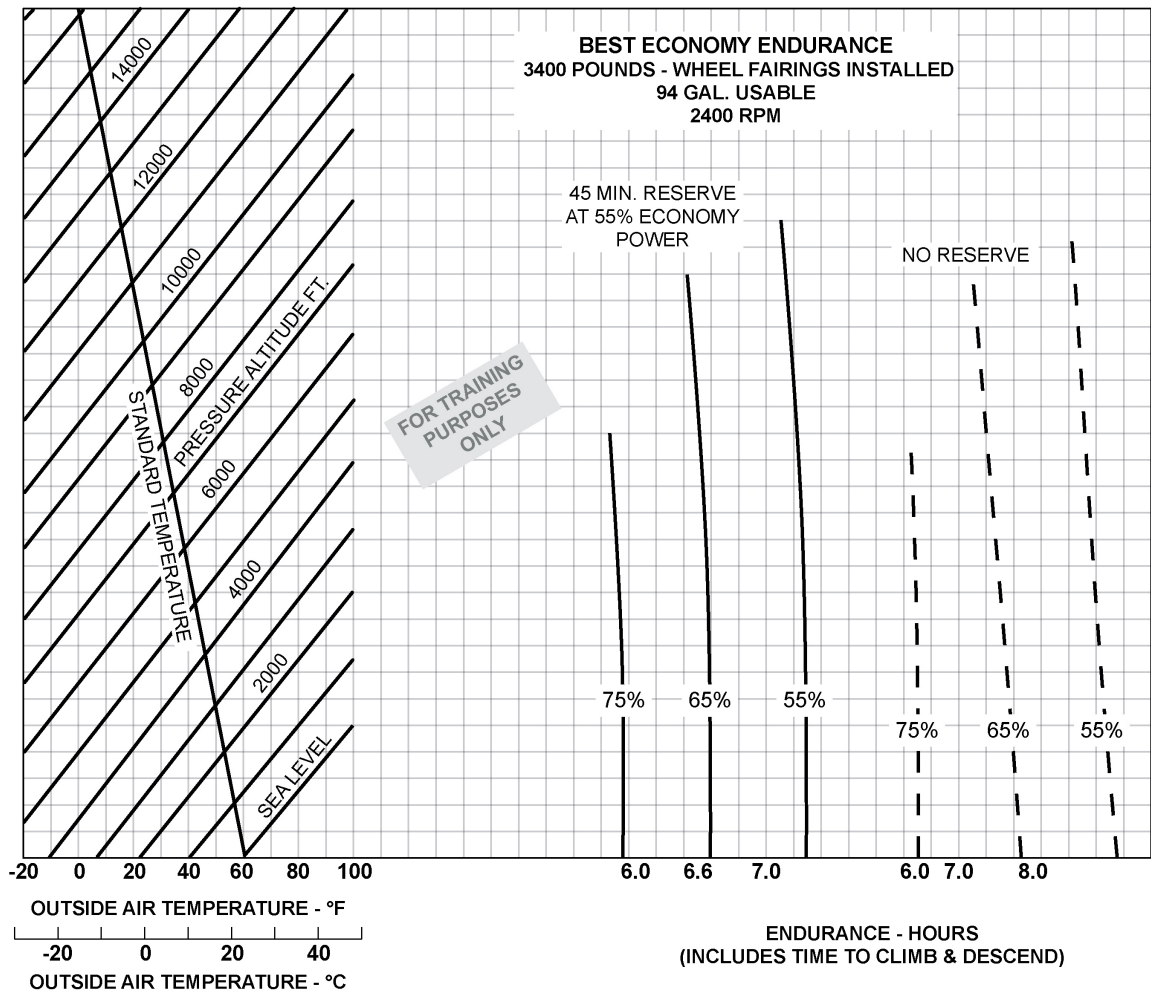


Figure 8.6 A typical endurance graph for a light single engine aeroplane

Figure 8.7 is for calculating the aircraft range and it works in exactly the same way as the endurance graph except that instead of working out airborne time, distance flown is shown.

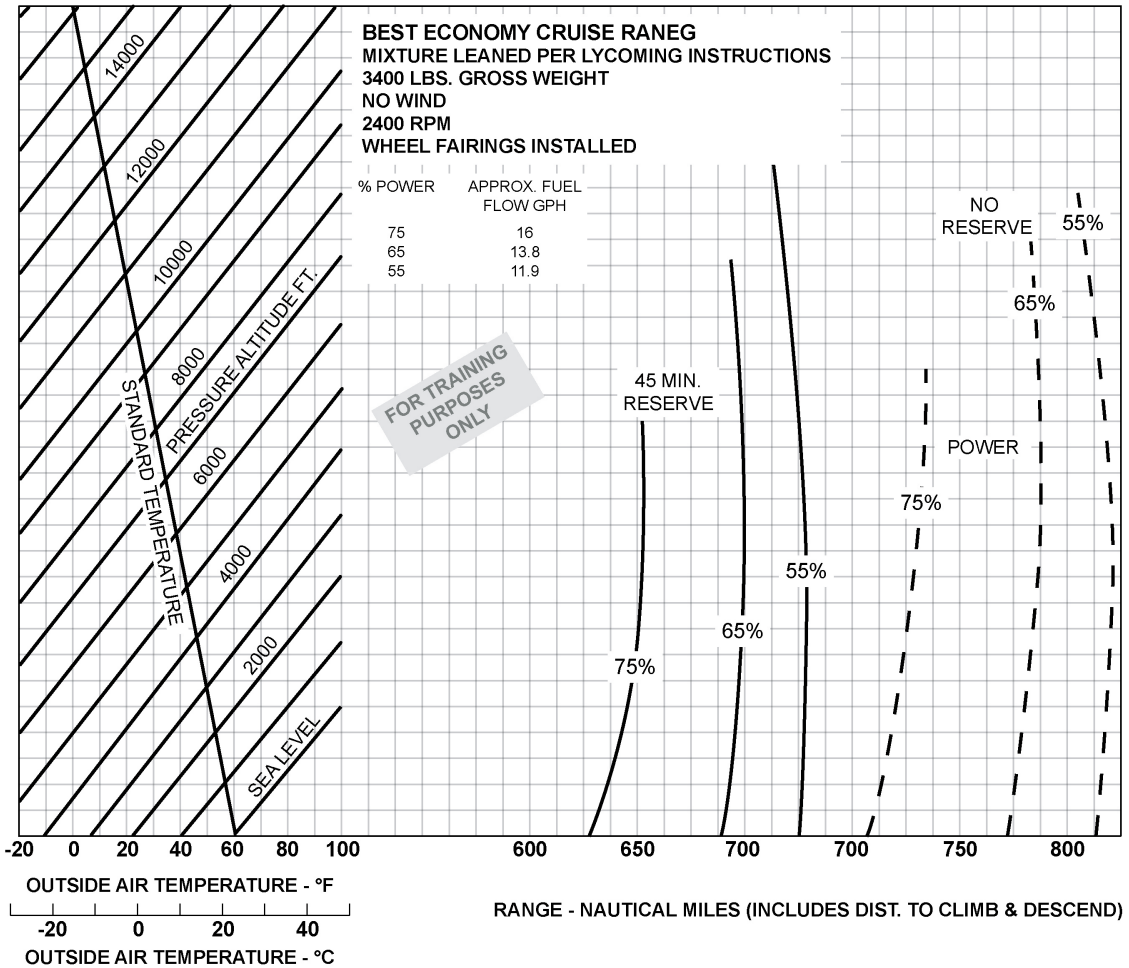


Figure 8.7 A typical endurance graph for a light single engine aeroplane

To achieve these range and endurance figures, be careful to follow the techniques described in the manual, especially with regard to correctly leaning the mixture.

QUESTIONS

1. Which of the following statements correctly describes one of the general requirements about the operation of Class B single engine aeroplanes in the public transport category?
 - a. They may fly at night.
 - b. They must be flown so that an airfield can be reached following engine failure.
 - c. They are not to operate in IMC, except under special VFR.
 - d. They must not be operated over water.

2. According to the information in a light aircraft manual, which gives two power-settings for cruise, 65% and 75%. If you fly at 75% instead of 65%:
 - a. Cruise speed will be higher and SFC will be the same.
 - b. Cruise speed will be higher and SFC will be lower.
 - c. Cruise speed will be higher and SFC will be higher.
 - d. Cruise speed will be the same and SFC will be the same.

3. According to the information in a light aircraft manual, which gives two power settings for cruise, 65% and 75%. If you fly at 65% instead of 75%:
 - a. Endurance will be higher and SFC will be the same.
 - b. Endurance will be higher and SFC will be lower.
 - c. Endurance will be higher and SFC will be higher.
 - d. Endurance will be the same and SFC will be the same.

4. For the purpose of ensuring compliance with the en-route regulations, up to what maximum altitude is the aeroplane assumed to operate?
 - a. The altitude where the rate of climb falls to 300 ft/min with maximum continuous power set.
 - b. With maximum take-off power set, the altitude where the rate of climb exceeds 300 ft/min.
 - c. With maximum continuous power set, the altitude where the rate of climb exceeds 300 ft/min.
 - d. The altitude where the rate of climb increases to 300 ft/min with maximum take-off power set.

5. For the purpose of ensuring compliance with the en-route regulations, the en-route descent gradient must be:
 - a. the gross gradient of descent decreased by 0.5%.
 - b. the net gradient of descent decreased by 0.5%.
 - c. the gross gradient of descent increased by 0.5%.
 - d. 0.5%.

6. To ensure a piston engine class B aeroplane can glide the furthest distance following engine failure, what speed must be flown?
 - a. VMP
 - b. 1.32 VMD
 - c. 0.76 VMD
 - d. VMD

7. Following engine failure, to maximise the descent range of a small piston engine aeroplane the aeroplane must be flown at:
- a. the speed for the maximum lift over drag ratio
 - b. VMP
 - c. the speed for minimum lift over drag ratio.
 - d. a speed equal to the aeroplane's best angle of climb.

ANSWERS

1. C
2. C
3. B
4. A
5. C
6. D
7. A

CHAPTER NINE

SINGLE ENGINE CLASS B - LANDING

Contents

LANDING REQUIREMENT	313
EXAMPLE LANDING REQUIREMENT	313
FACTORS TO BE ACCOUNTED FOR.	314
CORRECTION FACTORS.	315
DESPTACH RULES	315
REFERENCE LANDING SPEED (V_{REF})	317
PRESENTATION OF LANDING DATA / USING THE GRAPHS	317
QUESTIONS	318
ANSWERS	322

LANDING REQUIREMENT

This lesson will focus on the Class B single engine performance requirements for the landing stage of flight. There is actually only one regulation requirement for landing a single engined Class B aeroplane. This requirement is that the landing distance must not exceed the landing distance available. In other words, the aeroplane must be able to land within the length of the runway. In order to comply with this regulation, certain points must be taken into account. These will all be discussed in this lesson.

As with other regulations we have dealt with in this course, the requirements relevant to the landing of single engined class B aeroplanes can be found in CAP 698. JAR-OPS 1 states that an operator must ensure that the landing mass of the aeroplane, for the estimated time of arrival, allows a full stop landing from 50 ft above the threshold within 70% of the landing distance available at the destination aerodrome and at any alternate aerodrome." This means that the aeroplane must be able to land within 70% of the landing distance available. The factor to use for such calculation is 1.43.

EXAMPLE LANDING REQUIREMENT

To help clarify this, let us work through an example and use figure 9.1. If the landing distance available at the destination airfield is 2,200 ft long, then obviously the aeroplane must be able to land within 70% of 2,200 ft. To calculate this value, we must divide 2,200 ft by a factor of 1.43. Carrying out this simple calculation, gives us an answer of 1,538 ft. 1,538 ft is 70% of 2,200 ft. Therefore, the aeroplane must be able to achieve a full stop landing within 1,538 ft.

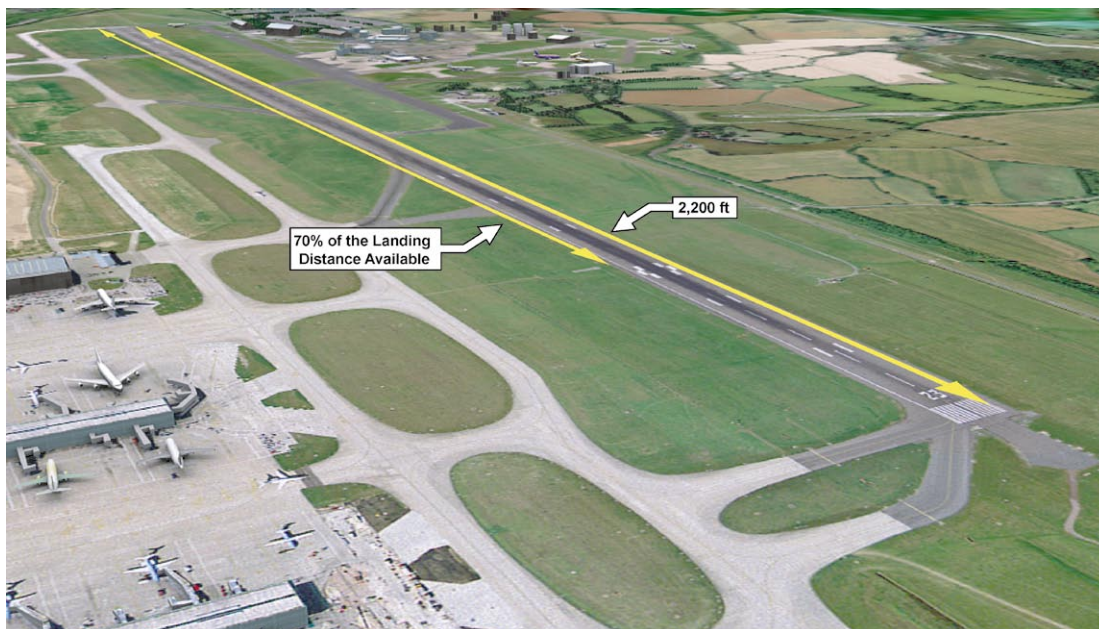


Figure 9.1 An illustration showing that the aeroplane must demonstrate it can come to a full stop within 70% of the landing distance available

There is another way to look at the landing requirement. If the landing distance of the aeroplane is calculated to be 1,200ft, what is the minimum length of the landing distance available which will allow a pilot to comply with the 70% rule? Use figure 9.2 to help. In this case we simply multiply 1,200 ft by 1.43. This gives us an answer of 1,716 ft. Therefore, the landing distance

available must be at least 1,716 ft long. If the destination aerodrome has a runway with a landing distance available in excess of 1,716 ft, the aeroplane will be able to land within 70% of the landing distance available and therefore satisfy the regulation requirement.



Figure 9.2 The obtain the minimum length of runway required, multiply the gross landing distance by 1.43

The 70% landing regulation helps us to see the difference between net and gross performance. Here the gross performance is 1,200 ft, but the net performance, which is always worse than the gross performance and is the one in a million worse case scenario, is 1,716ft.

The landing regulation we have just been discussing can be found in CAP 698 in section 2 at the top of page 9. The regulation states that the landing distance, from a screen height of 50 ft, must not exceed 70% of the landing distance available. If the aeroplane cannot come to a full stop within this length, then the landing distance must be reduced, either by selecting a higher flap setting or simply by reducing the mass of the aeroplane.

FACTORS TO BE ACCOUNTED FOR

The regulations in CS-23 state that when calculating the gross landing distance, certain details must be accounted for. These are listed below.

The gross landing distance shall take account of:

- the pressure altitude at the aerodrome
- standard temperature
- the runway surface conditions and the type of runway surface
- the runway slope
- not more than 50% of the reported headwind component or not less than 150% of the reported tailwind component
- the despatch rules for scheduled or planned landing calculations JAR-OPS 1.550 paragraph c.

CORRECTION FACTORS

Having discussed the regulation requirements detailing the maximum landing distance that must be available at a destination airfield or alternate airfield, we will now examine in detail the regulations governing how the gross landing distance is calculated given non standard conditions like grass runways, wet runways and sloping runways.

GRASS

In CAP 698 section 2, at the top of page 9 under point (b) we read that if the runway is of grass up to 20 cm high, the landing distance should be multiplied by a factor of 1.15. This would effectively increase the landing distance by 15%.

WET

If there is an indication that the runway may be wet at the estimated time of arrival, the landing distance should be multiplied by a factor of 1.15. Again, multiplying the calculated landing distance by a factor of 1.15 will increase the landing distance by 15%. If the Aeroplane Manual gives additional information on landing on wet runways, this may be used even if it gives a lesser distance than that from the above paragraph.

SLOPE

The landing distance should be increased by 5% for each 1% downslope. This means that for a 1% downslope the landing distance should be multiplied by a factor of 1.05. Therefore for a 2% downslope the factor would be 1.1. Point (d) also states that no allowance is permitted for upslope. The reason for this is that upslope will reduce the landing distance. If a pilot were to ignore the reduction in the landing distance then a margin of safety would be incorporated into the landing distance calculation.

DESPTACH RULES

Lastly, point (e) states that there must be compliance with the despatch rules for scheduled or planned landing calculations and that these can be found in CS-OPS 1.550 paragraph (c).

The despatch rules, found in CS-OPS 1.550 paragraph (c), state that for despatching an aeroplane, it must be assumed that:

- The aeroplane will land on the most favourable runway at the destination airfield in still air, and,
- The aeroplane will land on the runway most likely to be assigned considering the probable wind speed and direction.

If this second assumption cannot be met, the aeroplane may be despatched only if an alternate aerodrome is designated which full compliance of the regulatory despatch requirements can be met.

These despatch regulations may sound a little complicated, so let's examine them further.

The first assumption is that the aeroplane will land on the most favourable runway, in still air or zero wind. This means that, assuming zero wind at the destination airfield, the runway which would accommodate the largest possible landing mass would be selected since that is the most favourable runway.

Using an example which you see in figure 9.3, firstly we try and understand the first rule. Assuming zero wind and focusing on the column “STILL AIR MASS”, runway 04 and runway 22 both allow a maximum landing mass of 1,500 kg but runway 31 and runway 13, being much shorter runways, allow a maximum landing mass of only 1,000 kg. Therefore, the most favourable runway in still air is either runway 04 or 22, which both allow a maximum landing mass of 1,500 kg. These two masses have been highlight in red.

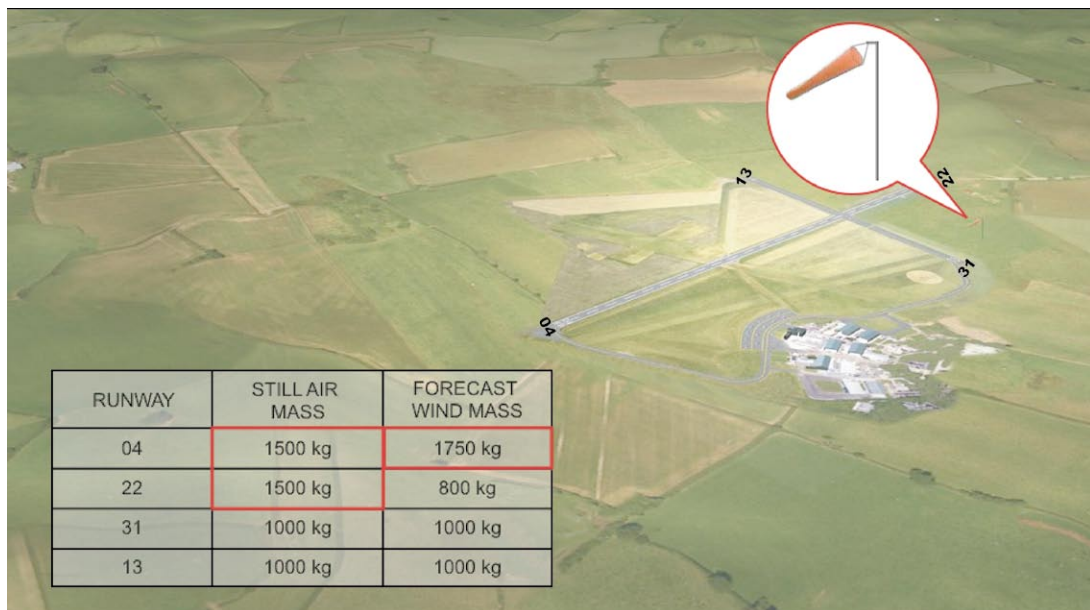


Figure 9.3 An illustration showing example landing masses of an aeroplane based upon no wind and the forecast wind condition

The second despatch assumption is that the aeroplane will actually land on the most likely runway to be assigned considering the probable wind speed and direction. Now focus on the second column “FORECAST WIND MASS”. In this case, runway 04 has a strong headwind for the landing which will allow the aeroplane to land at a much greater mass than if there were no wind. In our example the headwind has increased the maximum landing mass to 1,750 kg. However, runway 22 has a tailwind, which will decrease the maximum landing mass to 800 kg. Runway 31 and runway 13 both have a full cross wind; therefore, the maximum landing mass for these two runways will be the same as for still air. If the second despatch assumption is that the aeroplane will land on the runway most likely to be assigned considering the probable wind speed and direction, then it would have to be runway 04 with a maximum landing mass of 1750 kg. This mass is highlighted in red.

In summary then, the first assumption requires that the pilot select runway 04 or 22 for a maximum still air landing mass of 1,500 kg, and the second assumption will require the pilot to select runway 04 for a maximum landing mass of 1,750 kg.

Now we need to consider what to use as the despatch mass of the aeroplane. If the aeroplane was despatched at 1,750 kg mass, and then on arrival at the airfield, the wind was less than 15 knots, the aeroplane would not be able to land. Therefore, the aeroplane must be despatched with a mass of 1,500 kg. Despatching the aeroplane with this mass would mean that, no matter what wind conditions prevail at the destination airfield, the aeroplane will have a mass which will allow it to land at the airfield.

The way to simplify the despatch rule is always consider the greatest mass in still air and the greatest mass in the forecast wind conditions and, of the two, take the lesser mass as the despatch mass. Of the two, it is the still air mass that is usually the lesser mass, as shown in our example. The exception is when there is a tailwind on a unidirectional runway. A unidirectional runway is a runway whose direction for take-off and landing is fixed in one direction. And in this case the maximum landing mass in the tailwind will be less than the maximum landing mass in still air.

REFERENCE LANDING SPEED (V_{REF})

You may recall that the regulatory speed at the landing screen height is called V_{REF} , and, for a Class B single engine aeroplane it had to be no less than 1.3 times the stall speed in the landing configuration, ($1.3 V_{SO}$). A pilot must adhere to the V_{REF} speeds because they are the speeds which have been used to construct the landing graphs or table in the aeroplane flight manual. If a pilot were to deviate from these speeds, the required aircraft performance would not be achieved.

PRESENTATION OF LANDING DATA / USING THE GRAPHS

This part of the chapter will deal with how the aeroplane's landing distance can actually be calculated. All aeroplanes will have either a pilot operating handbook or an aeroplane flight manual. The purpose of these manuals is to show not only how to operate the aeroplane but also to detail the aeroplane's performance.

The example graph we will use is figure 2.4 on page 10 of section 2 in CAP 698. Always take a look at the associated conditions first, paying particular attention to the power and flap settings as shown here. Also notice that this graph assumes a runway which is paved, level and dry. If the runway conditions required for a given calculation are different, corrections will need to be made to the values that this graph will give. We saw these correction factors earlier.

The left hand carpet of the graph involves the variations in temperature and pressure altitude. This part of the graph accounts for the effect of air density on the landing distance. The middle carpet account for the effect of the mass and to the right of this carpet is the wind correction carpet. Notice the differences in the slope of the headwind and tailwind lines. This means the 150% and 50% wind rules have been applied. The last carpet on the far right of the graph is labelled "obstacle height". Although there is no "obstacle" as such you will recall that the landing starts at a height of 50 ft above the landing surface.

Follow through the example that has been carried out for in the graph. This will help you to use the graph correctly. Not only is there an example on the graph itself, but if you look at the bottom of page 9 of section 2 in CAP 698 you will see another example which you can work through. Use the examples; they are there to help you. If you need practice on working through the graphs use the questions at the end of the chapter.

QUESTIONS

1. For this question use Performance Manual CAP 698 SEP 1 Figure 2.4
With regard to the landing chart for the single engine aeroplane determine the landing distance from a height of 50 ft.

Given:-

O.A.T: 27 °C
Pressure Altitude: 3,000 ft
Aeroplane Mass: 2,900 lbs
Tailwind component: 5 kt
Flaps: Landing position (down)
Runway: Tarred and Dry

- a. approximately : 1,120 feet
b. approximately : 1,700 feet
c. approximately : 1,370 feet
d. approximately : 1,850 feet
2. For this question use Performance Manual CAP 698 SEP 1 Figure 2.4
With regard to the landing chart for the single engine aeroplane determine the landing distance from a height of 50 ft.

Given:-

O.A.T : ISA +15°C
Pressure Altitude: 0 ft
Aeroplane Mass: 2,940 lbs
Headwind component: 10 kt
Flaps: Landing position (down)
Runway: short and wet grass with firm soil base
Correction factor (wet grass): 1.38

- a. approximately : 1,300 feet
b. approximately : 2,000 feet
c. approximately : 1,450 feet
d. approximately : 1,794 feet
3. For this question use Performance Manual CAP 698 SEP 1 Figure 2.4
With regard to the landing chart for the single engine aeroplane determine the landing distance from a height of 50 ft.

Given:-

O.A.T : ISA +15°C
Pressure Altitude: 0 ft
Aeroplane Mass: 2,940 lbs
Tailwind component: 10 kt
Flaps: Landing position (down)
Runway: Tarred and Dry

- a. approximately : 950 feet
b. approximately : 1,900 feet
c. approximately : 750 feet
d. approximately : 1,400 feet

4. For this question use Performance Manual CAP 698 SEP 1 Figure 2.4
With regard to the graph for landing performance, what is the minimum headwind component required?

Given:-

Actual landing distance: 1,300 ft
Runway elevation: MSL
Weather: assume ISA conditions
Mass: 3,200 lbs

- a. No wind.
b. 5 kt.
c. 15 kt.
d. 10 kt.
5. For this question use Performance Manual CAP 698 SEP 1 Figure 2.4
With regard to the landing chart for the single engine aeroplane determine the landing distance from a height of 50 ft.

Given:-

O.A.T : 0°C
Pressure Altitude: 1,000 ft
Aeroplane Mass: 3,500 lbs
Tailwind component: 5 kt
Flaps: Landing position (down)
Runway: Tarred and Dry

- a. approximately : 1,480 feet
b. approximately : 940 feet
c. approximately : 1,770 feet
d. approximately : 1,150 feet
6. For this question use Performance Manual CAP 698 SEP 1 Figure 2.4
Using the Landing Diagram, for single engine aeroplane, determine the landing instance (from a screen height of 50 ft) required, in the following conditions:

Given:-

Pressure altitude: 4,000 ft
O.A.T.: 5°C
Aeroplane mass: 3,530 lbs
Headwind component: 15 kt
Flaps: Approach setting
Runway: tarred and dry
Landing gear: down

- a. 1,550 ft
b. 1,020 ft
c. 1,400 ft
d. 880 ft

7. For this question use Performance Manual CAP 698 SEP 1 Figure 2.4
With regard to the landing chart for the single engine aeroplane determine the landing distance from a height of 50 ft.
- Given:-
O.A.T : ISA
Pressure Altitude: 1,000 ft
Aeroplane Mass: 3,500 lbs
Tailwind component: 5 kt
Flaps: Landing position (down).
Runway: Tarred and Dry
- a. approximately : 1,800 feet
b. approximately : 1,150 feet
c. approximately : 1,500 feet
d. approximately : 920 feet
8. The Landing Distance Available at an aerodrome is 2,000 feet. For a Class B aircraft, what distance should be used in the landing distance graph to obtain the maximum permissible landing weight, if the runway has a paved wet surface with a 1% uphill slope?
- a. 1,398 ft
b. 1,216 ft
c. 1,850 ft
d. 2,100 ft
9. At an aerodrome, the Landing Distance Available is 1,700 feet. For a single engine Class B aircraft, what must be the actual landing distance in order to comply with the landing regulations?
- a. 1,033 ft
b. 1,478 ft
c. 2,431 ft
d. 1,189 ft
10. By what factor must the landing distance available for a single engine class B aeroplane be multiplied by in order to find the maximum allowable landing distance?
- a. 0.70
b. 1.67
c. 1.43
d. 0.60
11. The landing field length required for single engine class B aeroplanes at the alternate aerodrome is the demonstrated landing distance plus
- a. 92%
b. 43%
c. 70%
d. 67%

12. The actual dry landing distance of a single engine class B aeroplane is calculated at 1,300 ft. What is the minimum landing distance to be required at the aerodrome in order to comply with the landing regulations?. (runway is wet at the estimated time of arrival)
- a. 1,495 ft
 - b. 2,138 ft
 - c. 1,859 ft
 - d. 1,130 ft

ANSWERS

1. D
2. D
3. B
4. D
5. C
6. C
7. A
8. B
9. B
10. A
11. B
12. B

CHAPTER TEN

MULTI-ENGINE CLASS B - TAKE OFF

Contents

TAKE-OFF REQUIREMENTS.	325
GRADIENT REQUIREMENT JAR-OPS 1.530	325
FIELD LENGTH REQUIREMENTS	325
FACTORS TO BE ACCOUNTED FOR.	326
SURFACE CONDITION FACTORS	326
PRESENTATION OF TAKE-OFF DATA	327
ACCELERATE-STOP DISTANCE REQUIREMENTS	327
TAKE-OFF SPEEDS	327
OBSTACLE CLEARANCE REQUIREMENTS (JAR-OPS 1.535)	328
TAKE-OFF FLIGHT PATH	328
CONSTRUCTION OF THE FLIGHT PATH.	328
QUESTIONS	331
ANSWERS	334

TAKE-OFF REQUIREMENTS

The take-off requirements for multi-engined Class B aircraft (other than those in the commuter category) are the same as for single engine aircraft except that multi engine class B aeroplanes must additionally demonstrate a minimum climb gradient performance and an obstacle clearance capability.

GRADIENT REQUIREMENT JAR-OPS 1.530

Three climb gradient requirements must be considered, and the most limiting will determine the maximum permissible mass. You can find these in CAP 698 under paragraph 3.1.2 on page 9 of section 3.

➤ **ALL ENGINE OPERATING**

A minimum climb gradient of 4% is required with:

- take-off power on each engine
- landing gear extended, except that if the landing gear can be retracted in not more than 7 seconds, it may be assumed to be retracted
- the wing flaps in the take-off position
- a climb speed of not less than the greater of 1.1VMC and 1.2VSI

➤ **ONE ENGINE INOPERATIVE**

The climb gradient at an altitude of 400ft above the take-off surface must be measurably positive with:

- the critical engine inoperative and its propeller in the minimum drag position.
- the remaining engine at take-off power
- the landing gear retracted
- the wing flaps in the take-off position
- a climb speed equal to that achieved at 50 ft and

The climb gradient must not be less than 0.75% at an altitude of 1500 ft above the take-off surface, with:

- the critical engine inoperative and its propeller in the minimum drag position
- the remaining engine at not more than maximum continuous power
- the landing gear retracted
- the wing flaps retracted
- a climb speed not less than 1.2 VSI

FIELD LENGTH REQUIREMENTS

The Field Length Requirements are the same as for the single engine aeroplane and are detailed below. You can also find them in CAP 698 under paragraph 2.1.1 of page 1 and 2 of section 3.

- When no stopway or clearway is available, the take-off distance when multiplied by 1.25 must not exceed TORA (Gross TOD x 1.25 must not exceed the TORA)

- When a stopway and/or clearway is available the take-off distance must:
 - not exceed TORA (Gross TOD must not exceed the TORA)
 - when multiplied by 1.3, not exceed ASDA (Gross TOD x 1.3 must not exceed the ASDA)
 - when multiplied by 1.15, not exceed TODA (Gross TOD x 1.15 must not exceed the TODA)

FACTORS TO BE ACCOUNTED FOR

The regulations in CS-23 state that when calculating the gross take-off distance, in other words, before we add the factors mention previously, certain details must be accounted for. These are listed below.

The gross take-off distance required shall take account of:

- the mass of the aeroplane at the start of the take-off run
- the pressure altitude at the aerodrome
- the ambient temperature at the aerodrome
- the runway surface conditions and the type of runway surface
- the runway slope
- not more than 50% of the reported headwind component or not less than 150% of the reported tailwind component

SURFACE CONDITION FACTORS

From the list above the regulations stipulate that due account must be made of the runway condition. Most performance data in the aeroplane flight manual assumes a level, dry and hard runway. Therefore, correction factors must be applied to the gross take-off distance when the runway conditions are different. There are various correction factors such as for grass runways, wet runways and runways which are sloped. These factors are detailed next.

At the top of page 2 section 2 under paragraph c) in CAP 698 it states that if the runway is other than dry and paved the following correction factors must be used when determining the take-off distance. These are shown for you in figure 6.2

Surface Type	Condition	Factor
Grass (on firm soil) up to 20 cm Long	Dry	x 1.2
	Wet	x 1.3
Paved	Wet	x 1.0

Figure 10.1 The corrections factors that need to be applied to the gross take-off distance when the runway is other than dry, paved and level.

As you have learnt already, grass runways will increase the take-off distance compared to paved runways. Here the factor to use to account for the effect of dry grass is 1.2 and 1.3 if the grass is wet.

At the top of page 2 section 2 underneath the table, point d) details the corrections to be applied if there is a slope to the runway. It states that a pilot must increase the take-off distance by 5%, or by a factor of 1.05, for every 1% upslope. However, it also states that "no factorisation is permitted for downslope". In other words, when an aeroplane may be taking-off on a downwards sloping runway no correction factor is to be applied for the downslope. The reason for ignoring the downslope is because a downslope will decrease the take-off distance. This helps to add a little extra safety to the take-off distance calculation.

PRESENTATION OF TAKE-OFF DATA

Shown in CAP 698 on page 3 and 7 of section 3 you can see the take-off distance graphs for a typical Class B multi engine aeroplane. The one page is "normal take-off" and the one on page 7 is a "maximum effort" take-off, in other words a short field take-off. There are several examples in CAP 698, one at the bottom of page 2 and the other at the top of page 6 in section 3. Ensure you go through these examples to help you with your graph work and to help to when to apply the various factors.

ACCELERATE-STOP DISTANCE REQUIREMENTS

Other than for commuter category aircraft, there is no requirement for accelerate-stop distance, but the data may be given. Shown in CAP 698 on page 5 and 8 of section 3 you can see the accelerate stop distance graphs for a typical Class B multi engine aeroplane. Similarly with other graphs, there are examples which you should go through.

For commuter category aircraft, the accelerate-stop distance is the sum of the distances necessary to :

- Accelerate the aircraft to VEF with all engines operating.
- Accelerate from VEF to V1 assuming the critical engine fails at VEF
- Come to a full stop from the point at which V1 is reached.

TAKE-OFF SPEEDS

Other than for commuter category aircraft, these are the same as for the single engined Class B aircraft. The gross take-off distance required is the distance from the start of take-off to a point 50 ft. above the take-off surface, with take-off power on each engine, rotating at VR and achieving the specified speed at the screen.

VR The rotation speed, must not be less than :

- 1.05 VMC
- V_{S1}

The speed at 50 ft. must not be less than (the take-off safety speed):

- a speed that is safe under all reasonably expected conditions
- VMC
- V_{S1}

VMC for take-off must not exceed $1.2 V_{S1}$

These speeds are not found in CAP 698 and must be committed to memory.

OBSTACLE CLEARANCE REQUIREMENTS (JAR-OPS 1.535)

Multi-engined Class B aircraft must demonstrate clearance of obstacles after take-off up to a height of 1500ft. All the obstacle clearance requirements can be found in CAP 698 and therefore they **do not** need to be learnt. You can find them all on page 9 of section 3.

Obstacles must be cleared by:

- a vertical margin of at least 50ft or
- a horizontal distance of at least $90m + 0.125 D$ where D is the distance from the end of the TODA, or the end of the TOD if a turn is scheduled before the end of the TODA. For aeroplanes with a wingspan of less than 60m the horizontal distance may be taken as $60m + \text{half the wingspan} + 0.125D$.

The following conditions must be assumed:

- the flight path begins at a height of 50 ft above the surface at the end of the TOD required and ends at a height of 1500 ft above the surface.
- the aeroplane is not banked before it has reached the height of 50 ft, and thereafter that the angle of bank does not exceed 15°.
- failure of the critical engine occurs at the point on the all engine take-off flight path where visual reference for the purpose of avoiding obstacles is expected to be lost.
- the gradient to be assumed from 50 ft to the point of engine failure is equal to the average all engine gradient during climb and transition to the en-route configuration, multiplied by a factor of 0.77
- the gradient from the point of engine failure to 1500 ft. is equal to the one engine inoperative en-route gradient.

If the flight path does not require track changes of more than 15°, obstacles do not need to be considered if the lateral distance is greater than 300m if in VMC or 600m for all other conditions. If the flight path requires track changes of more than 15°, obstacles need not be considered if the lateral distance is greater than 600m in VMC or 900m for all other conditions.

TAKE-OFF FLIGHT PATH

The flight path profile performance should take account of:

- the mass of the aeroplane at the commencement of the take-off run
- the pressure altitude at the aerodrome
- the ambient temperature
- not more than 50% of the reported headwind component and not less than 150% of the reported tailwind component.

CONSTRUCTION OF THE FLIGHT PATH

The flight path profile will depend on whether or not visual reference is lost before reaching 1500 ft.

- VISIBILITY CLEAR TO 1500 ft
 - Determine the TOD required for the take-off mass
 - Determine the all engines net gradient (gross gradient x 0.77)

- Divide the height gain (1450 ft) by the gradient to determine the distance travelled (feet) from 50 ft to 1500 ft.
- The profile may be plotted as shown in figure 10.3 and clearance of obstacles assessed.

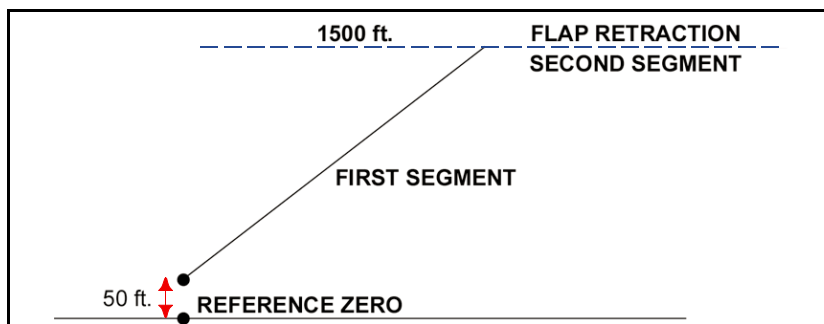


Figure 10.2. The obstacle clearance climb profile if there is no cloud

Alternatively for a single obstacle, find the TODR and gradient as above, then multiply the distance from the TODR to the obstacle by the gradient to find the height gain, and add 50 ft to find the aeroplane height at the obstacle distance. This must exceed the obstacle height by 50 ft.

If the obstacle is not cleared by 50 ft, a lower take-off mass must be assumed and a revised height calculated. The maximum mass which will just clear the obstacle by 50 ft can then be determined by interpolation.

➤ **CLOUD BASE BELOW 1500 ft**

If visual reference is lost before 1500 ft, the flight path will consist of two segments.

Segment 1 (From 50 ft to cloud base)

Distance from 50 ft to cloud base = height gain ÷ all engine net gradient x 100

Height gain = cloud base - 50 ft

Segment 2 (From cloud base to 1500 ft)

Distance = height gain ÷ Gross gradient with one engine inoperative x 100

The profile may be plotted as shown in Figure 10.3 and clearance of obstacles assessed. If the required clearance is not achieved a reduced take-off mass must be assumed and a second flight path calculated. As before the maximum permissible weight may be determined by interpolation.

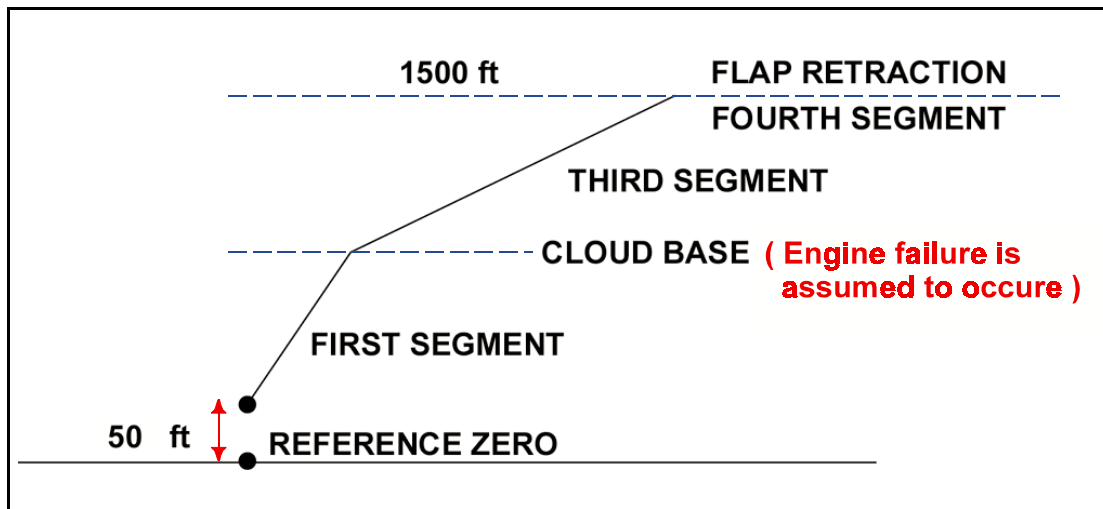


Figure 10.3 The obstacle clearance climb profile if there is cloud.

If the climb data is given in terms of rate of climb, this can be converted to gradient:

$$\text{Gradient}\% = \text{Rate of climb}(\text{ft}/\text{min}) \div \text{Aircraft true groundspeed} \times 100$$

Alternatively the time on each segment can be calculated:

$$\text{Time (mins)} = \text{height gain (ft)} \div \text{Rate of climb (ft/min)}$$

and the distance on each segment obtained from:

$$\text{Distance (ft)} = \text{Aircraft True Ground Speed (ft/min)} \times \text{Time (min)}$$

QUESTIONS

1. For a Class B multi-engine aeroplane at an aerodrome with no stopway or clearway, the length of take-off run that must be available for take-off, to satisfy the requirements:
 - a. Must not be less than the gross take off distance to 50ft
 - b. Must not be less than 1.15 times the gross take off distance to 50ft
 - c. Must not be less than 1.25 times the gross take off distance to 50ft
 - d. Must not be less than 1.3 times the gross take off distance to 50ft

2. For a multi-engine Class B aircraft, the rotation speed VR:
 - a. Must not be less than either 1.1 VS1 or 1.05 VMC
 - b. Must not be less than VS1
 - c. Must not be less than 1.05 VS1 or 1.1 VMC
 - d. Must not be less than VMC

3. For a multi-engine Class B aircraft, the take-off safety speed must:
 - a. not be less than either 1.1 VS1 or 1.05 VMC
 - b. greater than 1.2 VMC or 1.1 VS1
 - c. not be less than either 1.2 VS1 or 1.1 VMC
 - d. greater than VS1

4. For this question use Performance Manual CAP 698 MEP 1 Figure 3.4.
Determine the accelerate-stop distance from brake release to a full stop given an abort speed of 64 KIAS and a reaction time of three seconds.

Given:-
 - O.A.T : 27°C
 - Pressure Altitude: MSL
 - Aeroplane Mass: 3,750 lbs
 - Tailwind component: 5 kt
 - Flaps: 25°
 - Runway: Paved, Level and Dry
 - a. 2,200 ft
 - b. 1,800 ft
 - c. 3,300 ft
 - d. 2,400 ft

5. For this question use Performance Manual CAP 698 MEP 1 Figure 3.2. Determine the maximum permissible mass that will allow the aeroplane to come to full stop given an accelerate-stop distance available of 3,200 ft.
- Given:-
O.A.T : ISA
Pressure Altitude: MSL
Headwind component: 5 kt
Flaps: 0°
Runway: Paved, Level and Dry
- a. 3,550 lbs
b. 4,100 lbs
c. 4,250 lbs
d. 3,000 lbs
6. For this question use Figure 3.2 in CAP 698. With regard to the graph for the light twin aeroplane, will the accelerate and stop distance be achieved in a take-off where the brakes are released before Take-off power is set?
- a. It does not matter which take-off technique is being used.
b. No, the performance will be worse than in the chart.
c. Performance will be better than in the chart.
d. Yes, the chart has been made for this situation.
7. When assessing obstacle clearance after take-off for a twin engine Class B aircraft, the climb from 50 feet to 1,500 feet:
- a. Is always assumed to take place with all engines operating.
b. Assumes that an engine fails at the point where visual reference of the obstacle is lost.
c. Always assumes that an engine has failed at 50 feet.
d. Assumes that an engine fails at 400 feet above ground level.
8. A light twin engine aircraft is climbing from the screen height of 50ft, and has an obstacle 10,000m along the net flight path. If the net climb gradient is 10%, there is no wind and the obstacle is 900m above the aerodrome elevation then what will the clearance be?
- a. The aircraft will not clear the object.
b. 85 m
c. 100 m
d. 115 m
9. By what vertical margin must a multi-engine class B aeroplane clear an obstacle in the take-off flight path?
- a. 35 ft.
b. 50 ft
c. There is no obstacle clearance requirement
d. 60 m + 0.125D

10. Regarding the take-off climb requirements for a multi-engine class B aeroplane, what is the minimum all engine climb gradient after take-off?
- a. 0.75%
 - b. >0%
 - c. 4%
 - d. 2.4%
11. If a multi-engine class B aeroplane is unable to achieve the required vertical clearance over an obstacle, by what minimum horizontal margin must the obstacle be cleared (assume wing span < 60 m)
- a. $60 \text{ m} + \frac{1}{2} \text{ wingspan} + 0.125D$
 - b. $90 \text{ m} + 0.125D$
 - c. $60 \text{ m} / D + 0.125$
 - d. There is no minimum horizontal clearance requirement.
12. What is the maximum bank angle permitted within the take-off flight path up to 1,500 ft for a multi-engine class B aeroplane?
- a. 25°
 - b. 10°
 - c. 5°
 - d. 15°
13. By what regulatory factor must the all engine climb gradient of a class B multi engine aeroplane be multiplied by in order to comply with the obstacle clearance requirements?
- a. 0.5%
 - b. 0.5
 - c. 0.77
 - d. 1.43

ANSWERS

- | | |
|----|---|
| 1 | C |
| 2 | A |
| 3 | C |
| 4 | D |
| 5 | B |
| 6 | B |
| 7 | B |
| 8 | D |
| 9 | B |
| 10 | C |
| 11 | A |
| 12 | D |

CHAPTER ELEVEN

MULTI ENGINED CLASS B - EN-ROUTE AND DESCENT

Contents

EN-ROUTE REQUIREMENTS	337
THE DRIFT DOWN	338
CONSTRUCTION OF THE DRIFT DOWN PROFILE	339
QUESTIONS	341
ANSWERS	342

EN-ROUTE REQUIREMENTS

This chapter will focus on the Class B multi engine performance requirements for the en-route and descent stage of flight. The en-route part of the flight is considered to be from 1500 ft above the airfield from which the aeroplane has taken off, to 1000 ft above the destination airfield.

As with all the other requirements we have come across, the en-route and descent requirements are written in JAR-OPS 1 and abbreviated into CAP 698. However, the abbreviated version in CAP 698 is very clear and almost word for word like the original requirements published in JAR-OPS 1.

Looking at CAP 698 at the top of page 17 of section 3 you can see the en-route requirements. The first sentence simply reminds you what the en-route stage of flight is. These requirements are listed below.

- An operator shall ensure that the aeroplane, in the meteorological conditions expected for the flight, and in the event of the failure of one engine, with the remaining engines operating within the maximum continuous power conditions specified, is capable of continuing flight at or above the relevant minimum altitudes for safe flight stated in the Operations Manual to a point 1000 ft above an aerodrome at which the performance requirements for landing can be met.

This requirement is almost identical to the single engine aeroplane. The only difference being that whereas the single engine aeroplane has to be capable of landing in a suitable field after engine failure, the multi engine aeroplane must be capable of a higher performance level and therefore continue flight and land at a suitable airfield. Therefore, in the event of engine failure, the multi engine aeroplane should have a level of performance such that it can, even with an engine failure, get to an airfield to land. However, as with other requirements we have covered, the en-route requirements do have some compliance rules. In fact, these compliance rules are very similar to the ones we mentioned in the single engine en-route lesson.

In order for the pilot to be able to abide by the regulation, the descent range with one engine in-operative must be known as well as the one engine in-operative cruise range. Once these have been calculated, a flight track must be plotted that will ensure an airfield is always within the total one engine inoperative descent distance. Herein lies the compliance rules because the compliance rules relate to how that descent range is calculated.

- When showing compliance with the rules shown above.
 - The aeroplane must not be assumed to be flying at an altitude exceeding that at which the rate of climb equals 300 ft/min with all engines operating within the maximum continuous power conditions specified; and
 - The assumed en-route gradient with one engine inoperative shall be the gross gradient of descent or climb, as appropriate, respectively increased by a gradient of 0.5%, or decreased by a gradient of 0.5%.

What the first compliance rule means is the aeroplane must not use the extra altitude above the 300 feet per minute altitude to gain extra range to help comply with landing at an airfield after engine failure.

The compliance rule is saying that when calculating the descent range to work out if the aeroplane can make it to an airfield, the gross gradient of descent must be increased by 0.5%. This adjusted gradient is the net gradient and it is simply adding a safety margin into the aeroplanes descent range. In this case an airfield must be within the net descent range and not the gross descent range.

THE DRIFT DOWN

Calculating the descent range of a twin engine aeroplane after engine failure is not as easy as it was for the single engine aeroplane. For the single engine aeroplane, to calculate the descent range it was simply the height of the aeroplane divided by the descent gradient and multiplied by 100.

However, the gradient of descent of a twin engine aeroplane following engine failure is constantly changing. Let us explain why. In straight and level flight the forward force of thrust balances the rearward force of drag. When the engine fails, there is more rearward force than forward force, and, as a result of the excess drag the aeroplane will slow down if level flight is maintained. To maintain the speed, which should be kept at V_{MD} , the thrust force generated by the remaining live engine must be augmented so that the forces can once again be balanced.

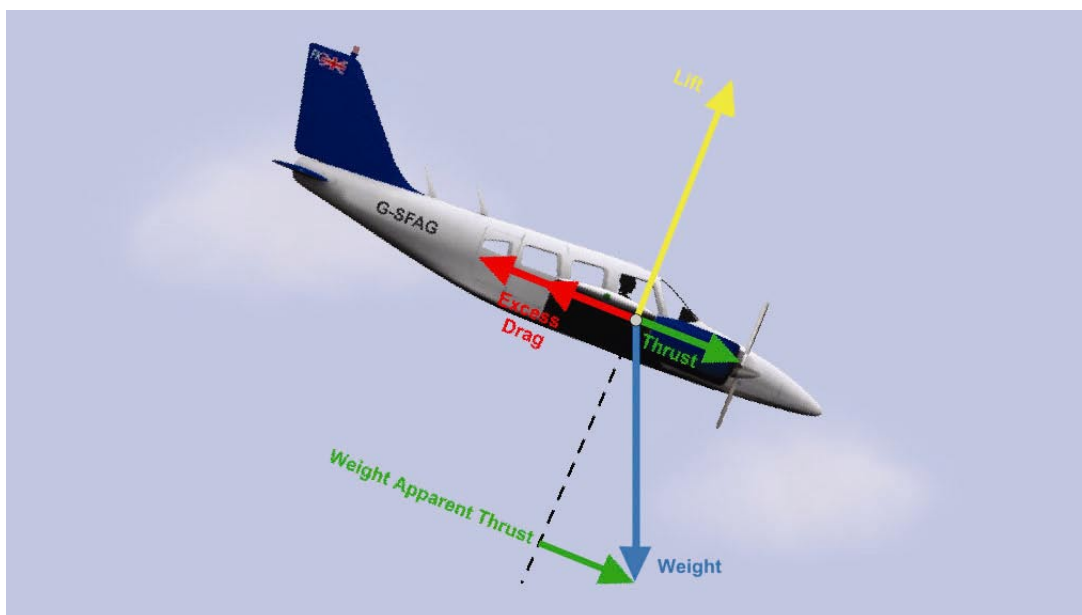


Figure 11.1 The forces of an aeroplane in the early part of the driftdown

The only way to do this is to lower the nose so that weight can act forward and provide enough weight apparent thrust to balance the excess drag. If the nose is lowered by a sufficient amount then the forces will once again balance and V_{MD} can be maintained. The only side effect is that the aeroplane is descending. However, as the aeroplane descends in the atmosphere, the air density increases. This means that the thrust being produced by the remaining engine increases which reduces the excess drag. Now that there is no need for so much weight apparent thrust since the excess drag has reduced. To reduce the amount of weight apparent thrust, the nose is raised a little.

This process can continue until the remaining engine generates sufficient thrust to balance the drag without any need for weight apparent thrust. At the altitude where this balance occurs the aeroplane is able to level off.

In summary then, after engine failure in the cruise, the aeroplane is forced to descend, but as it descends the aeroplane can slowly reduced the descent angle until the aeroplane can once more fly level. This procedure is known as the Driftdown procedure and it produces a Driftdown flight profile similar to the one shown in figure 11.2.

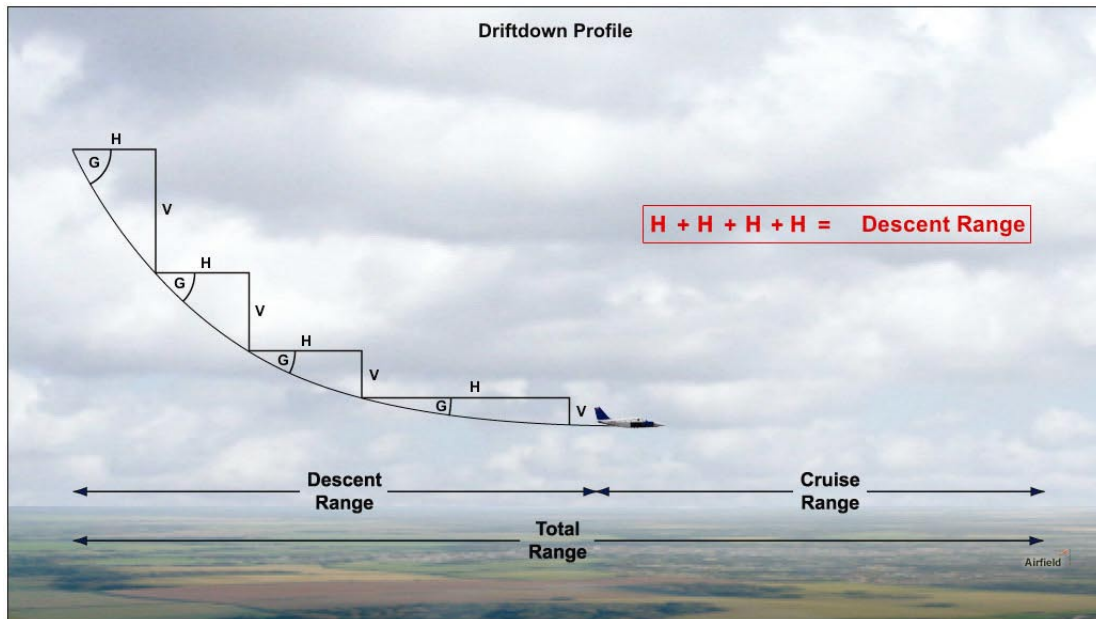


Figure 11.2 The driftdown profile split into manageable segments for easy calculation of the descent range

CONSTRUCTION OF THE DRIFT DOWN PROFILE

It was stated that calculating the descent range for a twin engine aeroplane after engine failure was complicated, and the reason, which is now hopefully apparent, is that the descent gradient or descent angle is constantly changing. In the absence of a Driftdown graph then the only feasible way of calculating the descent range is to break down the profile into manageable segments and carry out several calculations, as shown in figure 11.2.

Each of these calculations will need the net descent gradient at that attitude and the vertical interval of that segment. This will give the horizontal distance covered for that segment. To find the descent range, simply add all the horizontal distances in all the segments. After the descent range has been calculated and the aeroplane is able to fly straight and level, the last remaining information that is needed is to find out the one engine inoperative cruise range. Once this is known, it can be added to the descent range of the Driftdown profile to give the total range of the aeroplane following engine failure. Therefore, at any point along the flight there must be an airfield at which a landing can be made within the total range from engine failure. To ensure this, a circle, whose radius is the total single engine range, is drawn around each airfield between the departure and destination points. To comply with the regulations, the aeroplane track must fall inside these circles. In doing so the aeroplane will comply with JAR-OPS 1 which states that in the event of engine failure the aeroplane is capable of continuing flight to an aerodrome where a landing can be made.

QUESTIONS

1. For a multi-engine class B aeroplane, the en-route phase extends from:
 - a. 1,000 ft above the take-off surface to 1,500 ft above the landing surface.
 - b. 1,500 ft above the take-off surface to 1,000 ft above the landing aerodrome level.
 - c. From the start of level flight to the end of level flight.
 - d. 50 ft above the take-off surface to 1,500 ft above the landing aerodrome level.

2. Following engine failure in the cruise, what is the name given to the descent procedure from the cruise altitude to the one engine inoperative ceiling?
 - a. Descent profile.
 - b. Descent procedure.
 - c. Driftdown.
 - d. Emergency descent.

3. Why does the descent profile of the driftdown procedure steadily become shallower?
 - a. As density increases, the remaining engine generates more thrust.
 - b. Drag starts to decrease towards the end of the driftdown procedure.
 - c. Weight apparent thrust decreases with increasing density.
 - d. The increase in gravitational acceleration causes the weight apparent thrust to increase.

4. Which of the statements below correctly describes on the en-route requirements for a multi-engine class B aeroplane?
 - a. In the event of engine failure, the aeroplane is capable of reaching a place at which a safe forced landing can be made.
 - b. In the event of the failure of one engine, the aeroplane is capable of continuing flight to an aerodrome.
 - c. The aeroplane must not be operate unless a landing into safe forced landing areas can be made.
 - d. The aeroplane cannot operate above an altitude where the rate of climb is less than 300 ft/min.

5. Following engine failure in a class B multi-engine aeroplane at cruise altitude, why is the aeroplane forced to descend?
 - a. There is insufficient oxygen at high altitude to support the passengers.
 - b. Drag increases so that it exceeds the thrust available.
 - c. The one engine inoperative ceiling is lower than the two engine operative ceiling.
 - d. There is insufficient thrust to balance drag.

6. For a multi-engine class B aeroplane, following engine failure, what speed should be used during the descent to the one engine inoperative ceiling?
 - a. VMD
 - b. VMP
 - c. 1.32 VMD
 - d. VX

ANSWERS

- 1 B
- 2 C
- 3 A
- 4 B
- 5 D
- 6 A

CHAPTER TWELVE

MULTI-ENGINE CLASS B - LANDING

Contents

LANDING REQUIREMENTS.345
LANDING CLIMB REQUIREMENTS / GRADIENT REQUIREMENT345
LANDING DISTANCE REQUIREMENTS JAR-OPS 1.545346
FACTORS TO BE ACCOUNTED FOR.347
CORRECTION FACTORS.347
DESPTACH RULES348
REFERENCE LANDING SPEED (V_{REF})348
PRESENTATION OF LANDING DATA / USING THE GRAPHS348
QUESTIONS349
ANSWERS352

LANDING REQUIREMENTS

This chapter will focus on the Class B multi engine performance requirements for the landing stage of flight. There are two main regulation requirements.

1) The first requirement is that the landing distance must not exceed the landing distance available. In other words, the aeroplane must be able to land within the length of the runway. This requirement can be called the landing distance requirement.

2) The second requirement is that should the aeroplane be unable to land, it must be able to climb away from the aerodrome with an adequate climb gradient. This latter requirement can be called the landing climb requirement.

As with other regulations we have dealt with, the requirements relevant to the landing of multi engine class B aeroplanes can be found in CAP 698. However, caution must be exercised since CAP 698 contains very abbreviated versions of the requirements and therefore may be misleading. CAP 698, is after all, only supposed to contain supplementary information for examination purposes only.

LANDING CLIMB REQUIREMENTS / GRADIENT REQUIREMENT

Let's discuss the landing climb requirements first. If, for whatever reason, a landing was not possible, then the aeroplane should have a level of performance that would enable it to climb safely away from the airfield. This must be possible with either both engines operating or with one engine inoperative.

The landing climb requirements originate from the certification specification rules in CS-23 but are adopted in a brief format into JAR-OPS 1. JAR-OPS 1 divides the landing climb requirements into,

all engines operating, and one engine inoperative. You can find these requirements in CAP 698 at the bottom of page 17 and the top of page 18 of section 3 so you don't need to commit these requirements to memory.

ALL ENGINES OPERATING / BALKED LANDING REQUIREMENT

With all engines operating, the steady gradient of climb must be at least 2.5%. This gradient must be achieved with:

- The power developed 8 seconds after moving the power controls to the take-off position.
- The landing gear (undercarriage) extended.
- Flaps at the landing setting.
- Climb speed equal to V_{REF} .

Note: In order to demonstrate this climb capability for certification and for operational purposes, the undercarriage is assumed to be extended and the wing flaps in the landing position.

ONE ENGINE INOPERATIVE / MISSED APPROACH REQUIREMENTS

With the critical engine inoperative, the gradient of climb must not be less than 0.75% at an altitude of 1500 feet above the landing surface. This gradient must be achieved with

- The critical engine inoperative and the propeller feathered
- The live engine set at maximum continuous power
- The landing gear (undercarriage) retracted
- The flaps retracted
- Climb speed not less than $1.2 V_{SI}$.

Notice this time that in order to demonstrate this climb capability for certification and for operational purposes, the undercarriage and wing flaps are assumed to be retracted. The reason that the critical engine in-operative gradient requirement is much less than the all engine climb gradient requirement and that the aeroplane configuration is cleaner is because the failure of the critical engine results in an approximate 75% loss of climb gradient. Setting too high a level of regulation would impede on the operational capability of the aeroplane in terms of its payload because if the aeroplane is unable to attain these gradients, then the weight of the aeroplane must be reduced to an amount which can allow the gradient requirements to be met.

The term used to describe the maximum mass that can be carried and still attain the minimum gradient is called the **Landing Climb Limit Mass**.

The climb gradient requirements mentioned here are specific to aeroplanes in the normal, utility and aerobatic category of more than 2,722 kg and therefore only represent a portion of the requirements for multi engine class B aeroplanes.

An example of a landing climb performance graph is on page 19 of section in CAP 698. This graph is for the balked landing, in other words an all engine full power go around. However, notice that the graph only gives you a rate of climb. Therefore, in order to know if the aeroplane is achieving the minimum required gradient of 2.5% you must convert the rate of the climb into a gradient. An example of such a calculation is shown for you at the bottom of page 18 of section 3 in CAP 698.

LANDING DISTANCE REQUIREMENTS JAR-OPS 1.545

The landing distance requirements for multi-engined Class B aircraft are the same as for single engined aircraft (see Chapter 9). You can see these requirements in CAP 698 in the middle of page 17 of section 3.

JAR-OPS 1 states that an operator must ensure that the landing mass of the aeroplane, for the estimated time of arrival, allows a full stop landing from 50 ft above the threshold within 70% of the landing distance available at the destination aerodrome and at any alternate aerodrome.

This means that the aeroplane must be able to land within 70% of the landing distance available. The factor to use for such calculation is 1.43.

FACTORS TO BE ACCOUNTED FOR

The regulations in CS-23 state that when calculating the gross landing distance, certain details must be accounted for. These are listed below.

The gross landing distance shall take account of:

- the pressure altitude at the aerodrome
- standard temperature
- the runway surface conditions and the type of runway surface
- the runway slope
- not more than 50% of the reported headwind component or not less than 150% of the reported tailwind component
- the despatch rules for scheduled or planned landing calculations JAR-OPS 1.550 paragraph c).

CORRECTION FACTORS

Having discussed the regulation requirements detailing the maximum landing distance that must be available at a destination airfield or alternate airfield, we will now examine in detail the regulations governing how the gross landing distance is calculated given non standard conditions like grass runways, wet runways and sloping runways.

GRASS

In CAP 698 section 3, in the middle of page 17 under point (b) we read that if the runway is of grass up to 20 cm high on firm soil, the landing distance should be multiplied by a factor of 1.15. This would effectively increase the landing distance by 15%.

WET

Point c) states that if there is an indication that the runway may be wet at the estimated time of arrival, the landing distance should be multiplied by a factor of 1.15. Again, multiplying the calculated landing distance by a factor of 1.15 will increase the landing distance by 15%. If the Aeroplane Manual gives additional information on landing on wet runways, this may be used even if it gives a lesser distance than that from the above paragraph.

SLOPE

Point d) states the landing distance should be increased by 5% for each 1% downslope. This means that for a 1% downslope the landing distance should be multiplied by a factor of 1.05. Therefore for a 2% downslope the factor would be 1.1. Point (d) also states that no allowance is permitted for upslope. The reason for this is that upslope will reduce the landing distance. If a pilot were to ignore the reduction in the landing distance then a margin of safety would be incorporated into the landing distance calculation.

DESPTACH RULES

Lastly, point (e) states that there must be compliance with the despatch rules for scheduled or planned landing calculations and that these can be found in JAR-OPS 1.550 paragraph (c). The despatch rules, found in JAR-OPS 1.550 paragraph (c), state that for despatching an aeroplane, it must be assumed that;

- 1) The aeroplane will land on the most favourable runway at the destination airfield in still air, and,
- 2) The aeroplane will land on the runway most likely to be assigned considering the probable wind speed and direction.

If this second assumption cannot be met, the aeroplane may be despatched only if an alternate aerodrome is designated which full compliance of the regulatory despatch requirements can be met.

REFERENCE LANDING SPEED (V_{REF})

You may recall that the regulatory speed at the landing screen height is called V_{REF} , and, for a Class B single engine aeroplane it had to be no less than 1.3 times the stall speed in the landing configuration, ($1.3 V_{SO}$). A pilot must adhere to the V_{REF} speeds because they are the speeds which have been used to construct the landing graphs or table in the aeroplane flight manual. If a pilot were to deviate from these speeds, the required aircraft performance would not be achieved.

PRESENTATION OF LANDING DATA / USING THE GRAPHS

This part of the chapter will deal with how the aeroplane's landing distance can actually be calculated. All aeroplanes will have either a pilot operating handbook or an aeroplane flight manual. The purpose of these manuals is to show not only how to operate the aeroplane but also to detail the aeroplane's performance.

The example graph we will use is figure 3.9 on page 21 of section 3 in CAP 698. Always take a look at the associated conditions first, paying particular attention to the power and flap settings as shown here. Also notice that this graph assumes a runway which is paved, level and dry. If the runway conditions required for a given calculation are different, corrections will need to be made to the values that this graph will give. We saw these correction factors earlier.

The left hand carpet of the graph involves the variations in temperature and pressure altitude. This part of the graph accounts for the effect of air density on the landing distance. The middle carpet account for the effect of the mass and to the right of this carpet is the wind correction carpet. Notice the differences in the slope of the headwind and tailwind lines. This means the 150% and 50% wind rules have been applied. The last carpet on the far right of the graph is used because you will recall that the landing starts at a height of 50 ft above the landing surface. If you travel straight through the last carpet you will only calculate the landing roll, which in the example on the graph is 1,120 ft.

Follow through the example that has been carried out for in the graph. This will help you to use the graph correctly. Not only is there an example on the graph itself, but if you look at the bottom of page 20 of section 3 in CAP 698 you will see another example which you can work through. Use the examples; they are there to help you. If you need practice on working through the graphs use the questions at the end of the chapter.

QUESTIONS

1. The Landing Distance Available at an aerodrome is 2,500 feet. For a Class B aircraft, what distance should be used in the landing distance graph to obtain the maximum permissible landing weight, if the runway has a paved wet surface with a 1% downhill slope?
 - a. approximately : 1,665 ft
 - b. approximately : 1,447 ft
 - c. approximately : 1,748 ft
 - d. approximately : 2,500 ft

 2. A runway is contaminated with 0.5 cm of wet snow. Nevertheless the flight manual of a light twin authorises a landing in these conditions. The landing distance will be, in relation to that for a dry runway:
 - a. reduced.
 - b. substantially decreased.
 - c. increased.
 - d. unchanged.

 3. For this question use Performance Manual CAP 698 MEP 1 Figure 3.9
With regard to the normal landing chart for the multi engine aeroplane determine the landing distance from a height of 50 ft.

Given:-
 - O.A.T : 30°C
 - Pressure Altitude: 0 ft
 - Aeroplane Mass: 4,500 lbs
 - Headwind component: 10 kt
 - Flaps: 40°
 - Runway: Paved, level and dry
 - a. approximately : 1,300 feet
 - b. approximately : 2,050 feet
 - c. approximately : 2,395 feet
 - d. approximately : 2,475 feet

 4. For this question use Performance Manual CAP 698 MEP 1 Figure 3.9
With regard to the graph for normal landing performance, what is the maximum allowable landing mass in order to comply with the landing regulations?

Given:-
 - Runway length (unfactored): 3,718 ft
 - Runway elevation: 4,000 ft
 - Weather: assume ISA conditions
 - Runway: Paved, level and dry
 - Headwind Component: 4 kt
 - a. approximately : 4,000 lbs.
 - b. approximately : 3,500 lbs
 - c. approximately : 4,500 lbs.
 - d. approximately : 3,600 lbs.
-

5. At an aerodrome, the Landing Distance Available is 3,700 feet. For a multi-engine Class B aircraft, what must be the actual landing distance in order to comply with the landing regulations?
- a. 5,291 ft
 - b. 2,587 ft
 - c. 2,249 ft
 - d. 3,700 ft
6. By what factor must the Landing Distance Available for a multi engine class B aeroplane be divided by in order to find the maximum allowable landing distance?
- a. 0.70
 - b. 1.67
 - c. 1.43
 - d. 0.60
7. The landing field length required for multi engine class B aeroplanes at the alternate and destination aerodromes is the demonstrated or actual landing distance plus
- a. 92%
 - b. 43%
 - c. 70%
 - d. 67%
8. The landing climb requirements state, that the all engines operating climb gradient for a multi engine class B aeroplane, in the event of an abandoned landing, must be at least?
- a. 0.75%
 - b. 2.7%
 - c. 4%
 - d. 2.5%

ANSWERS

1. B
2. C
3. D
4. A
5. B
6. C
7. B
8. D

CHAPTER THIRTEEN

CLASS A AIRCRAFT - TAKE OFF

Contents

INTRODUCTION	355
OPERATIONAL REQUIREMENTS	355
FIELD LENGTH REQUIREMENTS	355
THE V SPEEDS	357
PRESENTATION OF DATA	366
BALANCED FIELD	366
UNBALANCED FIELD	366
V ₁ RANGE	369
TAKE-OFF FROM AN UNBALANCED FIELD	369
FIELD LIMIT BRAKE RELEASE MASS / FIELD LIMIT MASS	370
CLIMB GRADIENT LIMIT MASS	372
TYRE SPEED LIMIT MASS	374
BRAKE ENERGY LIMIT	376
BRAKE COOLING	378
RUNWAY STRENGTH	380
MAXIMUM TAKE-OFF MASS	380
CALCULATING TAKE OFF SPEEDS AND THRUST SETTINGS	380
CORRECTION FOR STOPWAY AND CLEARWAY	383
QUESTIONS	385
ANSWERS	392

INTRODUCTION

The specimen aeroplane used for Class A performance is the Boeing 737-400 series. Just to remind you, Class A aeroplanes are defined as being any multi engine jet, or any turbo propeller aeroplane with a mass of more than 5,700 kilograms OR has 10 seats or more.

Because of the high passenger capacity and high speed of these aeroplanes, they must have the highest safety standards. Safety standards are enforced in two ways. Firstly by the certification requirements, which were laid down in CS-25 and secondly by the operational requirements which are laid down in JAR-OPS 1. The operational requirements have one unique detail regarding Class A aeroplanes that is very different when compared to Class B aeroplanes. This difference is that the requirements state that for Class A aeroplanes engine failure must be considered for all stages of flight, whereas for Class B multi engine aeroplanes, engine failure was not assumed below 300 ft. Assuming engine failure for Class A aeroplanes adds an extra dimension to understanding and assessment the aeroplane's performance. Because of this, a lot of new terms and concepts will be introduced which you will need to become very familiar with before a full appreciation can be made of Class A aeroplane performance.

OPERATIONAL REQUIREMENTS

However, before we detail these new terms and concepts, let examine what the operational requirements are. JAR-OPS 1 states that an operator must ensure the take-off mass does not exceed the maximum take-off mass as published in the aeroplane flight manual. When calculating the maximum take-off mass, the accelerate stop distance must not exceed the accelerate stop distance available, the take-off distance must not exceed the take-off distance available, and lastly that the take-off run must not exceed the take-off run available. Compliance must use a single V1, which we shall understand later, and must take account of the aerodrome conditions.

To determine the maximum permissible mass for take-off it is necessary to consider the limits set by:

- the aerodrome distances available (Field Limit Mass)
- the climb requirements (Climb Limit Mass)
- obstacle clearance (Obstacle Limit Mass)
- brake energy limitations (V_{MBE})
- tyre speed limitations (Tyre Speed Limit Mass)
- runway strength limitation (ACN/PCN)
- maximum structural mass.

FIELD LENGTH REQUIREMENTS

Next it is important to find out how the take-off run, take-off distance and accelerate stop distance are calculated and what safety margins the authorities have included. In other words, how are the net distances worked out. These distances are defined in CS-25 and cover the cases of take-off with all engines operating and take-off with engine failure, for both dry and wet runways. You can see abbreviated versions of these requirements in CAP 698 on page 7 of section 4 under paragraph 2.1.2. Do not try and commit these requirements to memory, CAP 698 explains the requirements quite suitably and they are list below as they are in CAP 698.

NET TAKE-OFF RUN REQUIRED

If the take-off distance includes a clearway, the take-off run is the greatest of:

- All power units operating (dry and wet runway). The total of the gross distance from the start of the take-off run to the point at which V_{LOF} is reached, plus one half of the gross distance from V_{LOF} to the point at which the aeroplane reaches 35 ft, all factorised by 1.15 to obtain the net TORR.

As an example, let us pretend the distance from brake release to halfway between V_{LOF} and 35 ft is 1747 metres. This is then multiplied by 1.15. Multiplying 1747 metres by 1.15 makes the total distance 2009 metres.

- One power unit inoperative (dry runway). The horizontal distance from the brakes release point (BRP) to a point equidistant between V_{LOF} and the point at which the aeroplane reaches 35 ft with the critical power unit inoperative.

As an example, let us assume that this distance is 1950 metres.

- One power unit inoperative (wet runway). The horizontal distance from the brake release point (BRP) to the point at which the aeroplane is 15ft above the take-off surface, achieved in a manner consistent with the attainment of V_2 by 35ft, assuming the critical power unit inoperative at V_{EF} .

Lastly, as an example, let us assume that this distance is 2001 metres

Once these three distances have been calculated by the manufacturer, the greatest of the three is then published as the certified net take-off run required. In our example, the net take-off run required is 2009 metres. In the exam you will be presented with various distances and you must be able to work out which of the distances is selected as the net take-off run required

NET ACCELERATE STOP DISTANCE REQUIRED

The accelerate-stop distance on a wet runway is the greatest of:

- All engines operating. The sum of the distances required to accelerate from BRP to the highest speed reached during the rejected take-off, assuming the pilot takes the first action to reject the take-off at the V_1 for take-off from a wet runway and to decelerate to a full stop on a wet hard surface, plus a distance equivalent to 2 seconds at the V_1 for take-off from a wet runway.
- One engine inoperative. The sum of the distances required to accelerate from BRP to the highest speed reached during the rejected take-off, assuming the critical engine fails at V_{EF} and the pilot takes the first action to reject the take-off at the V_1 for take-off from a wet runway with all engines operating and to decelerate to a full stop on a wet hard surface with one engine inoperative, plus a distance equivalent to 2 seconds at the V_1 for take-off from a wet runway.
- The accelerate-stop distance on a dry runway.

NET TAKE-OFF DISTANCE REQUIRED

The take-off distance required is the greatest of the following three distances:

- All engines operating. The horizontal distance travelled, with all engines operating, to reach a screen height of 35 ft multiplied by 1.15
- One engine inoperative (dry runway). The horizontal distance from BRP to the point at which the aeroplane attains 35 ft, assuming the critical power unit fails at V_{EF} on a dry, hard surface.
- One engine inoperative (wet runway). The horizontal distance from BRP to the point at which the aeroplane attains 15 ft, assuming the critical power unit fails at V_{EF} on a wet or contaminated hard surface, achieved in a manner consistent with the achievement of V_2 by 35ft.

THE V SPEEDS

V_{EF}

The calibrated airspeed at which the critical engine is assumed to fail. It is used for the purpose of performance calculations. It is never less than V_{MCG} .

The speed V_{EF} is a rather strange one. As per the certification specification definition, V_{EF} means the speed at which the critical engine is assumed to fail during take-off. V_{EF} is selected by the aeroplane manufacture for purposes of certification testing, primarily to establish the range of speeds from which V_1 may be selected and secondly to help determine the accelerate stop distance required. Lets us try and explain what V_{EF} is all about.

The definition of V_1 is the speed at which, if the failure of the critical engine was recognised, there is sufficient distance remaining to either abandon the take-off or continue the take-off. However, recognising that the engine has failed does take time, in fact it's about 1 second. Therefore to recognise the engine failure at V_1 , the engine must have failed about 1 second before V_1 . The speed, at which the critical engine fails, so that it may be recognised at V_1 , is called V_{EF} .

V_1 – DECISION SPEED

This is by far the most important speed in the take-off for Class A aeroplanes. V_1 is called the decision speed. It is so called because V_1 determines the outcome of a critical decision that must be made following an engine failure or other major critical systems failure.

V_1 is defined as being the maximum speed at which the pilot must take the first action in order to stop the aeroplane within the remaining accelerate stop distance. V_1 is also the minimum speed following engine failure that the pilot is able to continue the take-off within the remaining take-off distance.

V_{GO} is the lowest decision speed from which a continued take-off is possible within the take-off distance available. V_{STOP} is the highest decision speed from which the aeroplane can stop within the accelerate-stop distance available. These two speeds are the extremes of V_1 .

There are some rules about the speed for V_1 . These are shown in CAP 698 on page 2 of section 4 alongside the V_1 definition. It states that V_1 :

- may not be less than V_{EF} plus the speed gained with the critical engine inoperative for the time between engine failure and the point at which the pilot applies the first means of retardation.
- must not exceed V_R
- must not exceed V_{MBE}
- must not be less than V_{MCG}

If the engine were to fail before V_1 , then the decision would be to abort the take-off. The reason is because, with only one engine operating, there would be insufficient take-off distance left to accelerate the aeroplane to the screen height. If the engine were to fail after V_1 , the decision is to continue the take-off. The reason is because the aeroplane is travelling too fast to be able to stop within the remaining accelerate stop distance available. In order to understand how V_1 is derived, we need to consider a graph which is shown in figure 13.1. This graph plots the take-off distance required and accelerate stop distance required based on a varying engine failure speed.

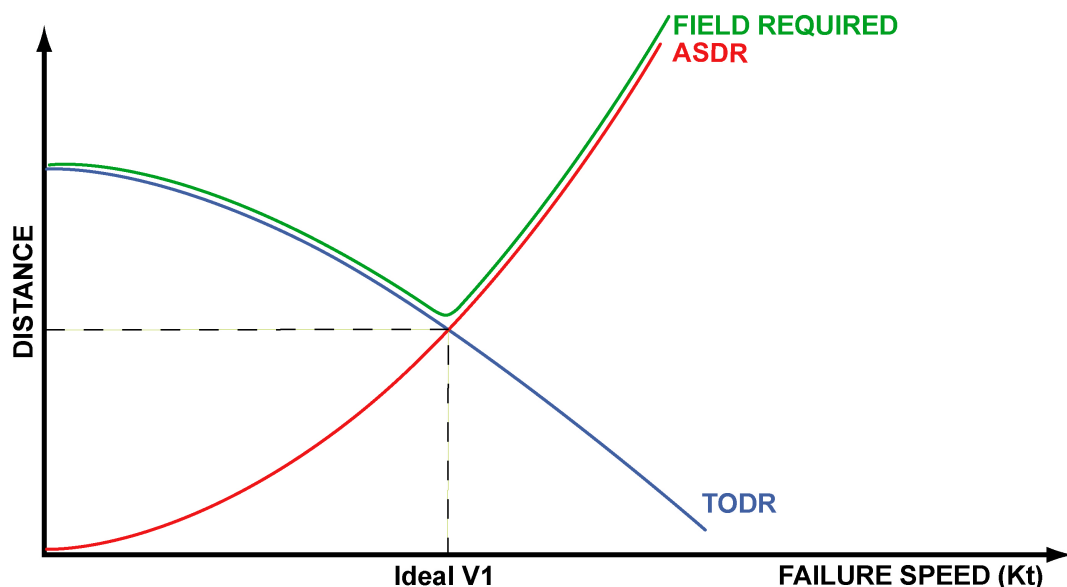


Figure 13.1 A graph showing the ideal position of V_1 .

Looking at the graph you can see that a V_1 at the intersection point of the graph is the best V_1 to use, simply because a V_1 at that speed requires the least amount of field required or the least amount of runway. The V_1 at the intersection point of the curves is sometimes called the “Idealised V_1 ”. It is also the V_1 which makes the take-off distance required be the same length as the accelerate stop distance required, and therefore, this V_1 speed is also called the “Balanced V_1 ” since it balances the required distances for the aeroplane. What this graph is also useful for is to see the effect of using higher or lower V_1 's.

For example, if for whatever reason V_1 was increased, notice that the accelerate stop distance required increases, the take off distance required decreases and the total field required increases. However, should V_1 be reduced from the intersection point, the accelerate stop distance decreases, the take-off distance increases and the total field required increases. Trying to figure these points out without the use of this simple graph would not be easy. So use this graph to help you understand the effect of increasing or decreasing V_1 .

FACTORS AFFECTING V_1

It is important to detail what factors can influence V_1 . In essence, whatever factors change either the accelerate stop distance required or the take-off distance required curves shown in figure 13.1, will affect V_1 . However, there is simpler way to go through the list of factors affecting V_1 . In every aeroplane flight manual there will be a set of tables and or graphs which will allow you to calculate what V_1 should be on any given day. On page 18 and 19 of section 4 in CAP 698 are such tables. Turn to page 18 and look at the second table from the top of the page where you see a column "A" and "B" etc. This table lists the three V speeds, including V_{1r} , against the aeroplane mass. This table can show us what the effect of certain factors are.

- **MASS** For example, lets look at what aeroplane mass does to V_1 . Look under column A and under V_1 . If the aeroplane mass was 50,000 kg, V_1 would be 129 knots, but if the mass was increased to 65,000 kg then V_1 would increase to 151 knots. Therefore, increasing mass increases V_1 .
- **CONFIGURATION** The next factor to affect V_1 is the aeroplane configuration. Page 18 lists the V speeds for 5 degrees flaps and page 19 lists the V speeds with 15 degrees of flap. Therefore comparing the speeds from these two pages, should tell us the effect of the flaps. On page 18, which is 5 degrees flap and using column "A" again, a 55,000 kg mass requires a V_1 speed of 137 knots, but on page 19, which is 15 degree flap and for the same mass of 55,000 kg, the V_1 speed is now 130 knots. Therefore we can see that increasing the flap angle, decreases V_1 .
- **DENSITY** The next factor to affect V_1 is density, but this is little harder to observe than the previous two factors. On page 17 of section 4 is a small table, which has temperature on one axis and pressure altitude on the other. This is the density accountability table. Under low altitudes and low temperatures is band A. This is a high density band, Where as band F is situated at higher temperatures and higher altitudes which equates to much lower densities. We can now use these bands to see the effect density has on V_1 . Returning to page 18, notice that bands A, B, C, D, E and F are in the speed tables. Taking a mass of 50,000 kg in band A, which is high density, V_1 is 129 knots, but in band B, C, D and E, the value of V_1 is increasing. Therefore, as density falls, shown by going through bands A to E, V_1 increases.
- **SLOPE AND WIND** The last two factors that affect V_1 are runway slope and wind. Notice that at the top of page 18 and 19 there is a table which is titled "Slope and Wind V_1 adjustment". If there were a downslope of 2%, then with an aeroplane mass of 70,000 kg, V_1 would have to be reduced by 3 knots. Whereas if the runway had an upslope of 2%, with the same mass, V_1 must be increased by 4 knots. Therefore, downslope reduce V_1 and upslope increase V_1 . The right hand side of the table is the correction for wind. So, for example, if there was a 15 knot tailwind, then with a mass of 70,000 kg, V_1 would have to be reduced by 3 knots, whereas if there was a headwind of 40 knots for the same mass, V_1 would have to increase by 1 knot. Therefore, tailwinds reduce V_1 , and headwinds increase V_1 .

Having finished discussing the main factors affecting V_1 , there are other influences however, which may or may not change the value of V_1 . Two influences on V_1 in particular are the speed V_{MCG} and V_{MBE} . In CAP 698 on page 2 of section 4 we see the definition of V_1 , but more importantly, at the end of the paragraph we read that V_1 must not be less than V_{MCG} and not greater than V_R and not greater than V_{MBE} . Since V_1 must be between V_{MCG} and V_R and V_{MBE} , then depending on the values of these speeds, they may or may not push V_1 to be higher or lower than the ideal V_1 speed.

We will understand this better once we have discussed what V_{MCG} and V_{MBE} are.

V_{MCG} - Ground Minimum Control Speed

V_{MCG} is short for the ground minimum control speed, and it is described for you in CAP 698 at the bottom of page 3 section 4. It states V_{MCG} is the minimum speed on the ground at which the take-off can be safely continued, when the critical engine suddenly becomes in-operative with the remaining engines at take-off thrust. Let's try and understand what this actually means.

When an engine fails, the remaining engine still generates thrust and this causes the aeroplane to yaw away from the live engine. The amount of yaw is a function of the amount of thrust the live engine is generating. Greater thrust from the live engine would generate more yaw. The only way to counteract this is to use the ailerons and the rudder to try and steer the aeroplane in the right direction. However, when the aeroplane is on the ground, you cannot use the ailerons to control the yaw otherwise you might bank the wing into the ground. Therefore the only available aerodynamic surface left to control the asymmetric yaw is the rudder. However, for the rudder to be effective enough at controlling the yaw, there must be sufficient airflow over it to ensure it has the required aerodynamic force. This minimum airflow speed over the rudder is V_{MCG} . If the engine were to fail below this speed, then there is insufficient flow over the rudder to counteract the asymmetric yaw and therefore it is not possible to continue the take-off.

The only factor that controls the value of V_{MCG} is thrust, and since take-off thrust is more or less constant, then the only variable on the amount of take-off thrust generated is air density. The higher the air density, the more thrust that can be generated and therefore the more yaw that is generated when the engine fails, therefore the airflow over the rudder must be faster to make the rudder effective enough to counteract the yaw.

The effect of air density on V_{MCG} can be seen by looking at the second table from the bottom on page 18 and 19 of section 4 in CAP 698. This table shows the variable of temperature on one side and the variable of pressure altitude on the other. Look at the V_{MCG} in the table and notice that at low temperatures and low pressure altitudes where the air density would be high, the value of V_{MCG} is also high. Therefore we can say that as density increases, V_{MCG} increases. Although V_{MCA} is the minimum control speed in the air, the factors that affect V_{MCA} can for the purpose of the exam, are the same as for V_{MCG} .

 V_{MCA} / V_{MC} - Air Minimum Control Speed

The air minimum control speed. The minimum flight speed at which the aeroplane is controllable, with a maximum of 5° bank, when the critical engine suddenly becomes inoperative with the remaining engines at take-off thrust.

 V_{MCL} - Landing Minimum Control Speed

The minimum control speed during landing approach. The minimum speed with a wing engine inoperative where it is possible to decrease thrust to idle or increase thrust to maximum take-off without encountering dangerous flight characteristics.

 V_{MBE} - Maximum Brake Energy Speed

We stated that there were two particular speeds that can influence V1. One of them was V_{MCG} which we just discussed the other was V_{MBE} . Turning back to the top of page 3 of section 4 of CAP 698 you can see the description of V_{MBE} . V_{MBE} is the maximum brake energy speed and it represents the maximum speed on the ground from which an aeroplane can safely stop within the energy capabilities of the brakes. Essentially this means that if the take-off was abandoned at a speed higher than V_{MBE} , and maximum braking force was applied, the brakes would not be able to safely bring the aeroplane to a stop regardless of how much runway was left. The brakes would most probably catch fire, melt and or disintegrate.

You do need to be aware of the factors that control V_{MBE} but luckily, most manuals, and indeed CAP 698 has a V_{MBE} graph or table with all the variables and factors on it that can affect V_{MBE} . The graph concerned is on page 15 of section 4. If you need to see the effect of a variable, for example, mass, simply work through the graph but use two different masses. In this case the heavier mass has reduced V_{MBE} . The variables that affect V_{MBE} are pressure altitude, ambient air temperature, mass, slope and wind. Carefully examine each of these factors so you can see for yourself how they change V_{MBE} . Remember, CAP 698 is for use in the exam, so if there are any questions which relate to V_{MBE} you can rest assured that a lot of information on V_{MBE} is already in front of you.

$$V_{MCG} - V_1 - V_{MBE}$$

Having looked at V_{MBE} and V_{MCG} we are now better placed to understand why these two speeds play a role in influencing V_1 . According to the rule, V_1 must not be less than V_{MCG} as shown in figure 13.2

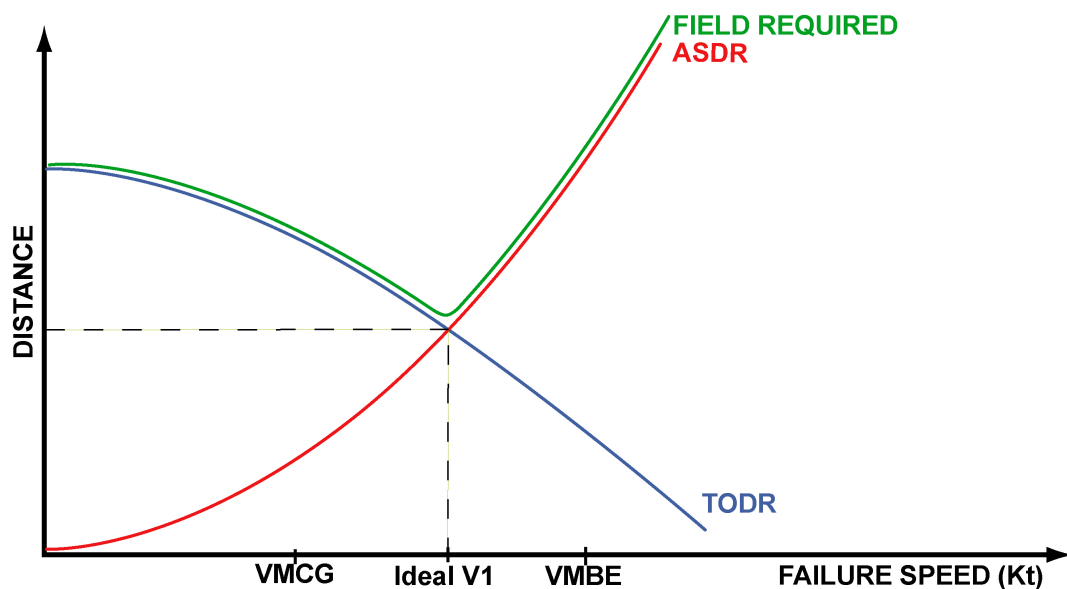


Figure 13.2 The relationship of V_1 with V_{MCG} and V_{MBE}

V_1 cannot be allowed to be less than V_{MCG} because engine failure below V_{MCG} means the aeroplane is uncontrollable and the definition on V_1 is that the take-off can be continued following engine failure.

The rule also stated that V_1 must not be greater than V_{MBE} . Again, this makes sense, because at V_1 the aeroplane must be able to stop or continue the take-off, but above the V_{MBE} it is impossible to bring the aeroplane safely to a stop.

Let us look at a scenario, where due to high density; the value of V_{MCG} is higher than the idealised V_1 . In this case, take-off is prohibited. However, this problem is solvable. The chosen V_1 can simply be increased until it is equal to or more than V_{MCG} . However, notice that the accelerate stop distance increases, the take-off distance decreases and more importantly, the total field length required increases. So long as the runway is as long as the total field required, then moving V_1 to this point is not a problem. Hopefully, by understanding this graph you are able to see the consequences to the required distance should V_1 need to be moved from it's ideal or balanced position due to pressure from V_{MCG} and V_{MBE}

V_{MU} - Minimum Un-stick Speed

The speed V_{MU} is defined as the minimum un-stick speed. V_{MU} is slowest calibrated airspeed, at which, the aeroplane can safely lift off the ground, and continue the take-off. However, despite V_{MU} being the lowest speed the aeroplane can safely lift off the runway, in actual operating conditions, the aeroplane does not lift off at this speed. The aeroplane is flown so that it actually lifts-off at a slightly faster speed. The reason is because V_{MU} is very close to the stall speed, the aeroplane controllability is very “sloppy”, and lastly, in order to actually lift off at V_{MU} some fairly dramatic actions take place which may be uncomfortable for the passengers.

It may seem strange, but the aeroplane is actually able to lift at a speed where lift is less than weight.

The reason being because, so long as the nose can be raised to high enough attitude, then there is a vertical component of thrust which, together with lift, balances weight. The amount of this vertical thrust is controlled in part by the amount of thrust generated, but also by the amount of nose up attitude the aeroplane can attain. This nose up attitude may be limited by the power of the elevator to push the tail plane down, or by the tail plane striking the runway in what is described as a tail strike.

Hopefully now you are able to realise why it is unwise in operational conditions to lift the aeroplane off the ground at V_{MU} . The actual speed the aeroplane will lift off, in operational flights, is called V_{LOF} and we will discuss this speed next.

 V_{LOF} - Lift-off Speed

V_{LOF} means the lift-off speed. V_{LOF} is the calibrated airspeed at which the aeroplane first becomes airborne which is at the moment when the main wheels have left the runway. V_{LOF} should be faster than the minimum unstuck speed V_{MU} . The margin above V_{MU} is determined by several factors.

For example, V_{LOF} must not be less than 110% of V_{MU} in the all engines- operating condition and 105% of V_{MU} in the one engine inoperative condition. However, if the attitude of aeroplane in obtaining V_{MU} was limited by the geometry of the aeroplane (i.e., tail contact with the runway), V_{LOF} must not be less than 108% of V_{MU} in the all-engines operating condition and 104% of V_{MU} in the one engine inoperative condition.

 V_R - Rotation Speed

Rotation speed, V_R is the speed at which the pilot initiates action to raise the nose gear off the ground, with the intention of becoming airborne. The pilot action is to pull back on the control column. This action deflects the horizontal stabilizer to create a downward aerodynamic force. This force rotates the aeroplane about its lateral axis and will raise the nose wheel off the ground.

V_R may not be less than

- V_1
- $1.05 V_{MC}$
- a speed such that V_2 may be attained before 35ft.
- a speed such that if the aeroplane is rotated at its maximum practicable rate will result in a V_{LOF} of not less than $1.1 V_{MU}$ (all engines operating) or $1.05V_{MU}$ (engine inoperative) [if the aeroplane is geometry limited or elevator power limited these margins are $1.08 V_{MU}$ (all engines) and $1.04 V_{MU}$ (engine inoperative)]

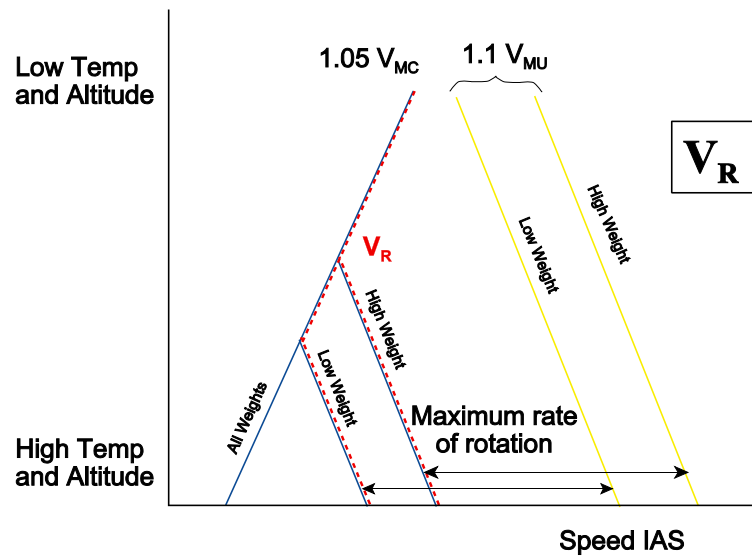


Figure 13.3

Lastly, as with other speeds, we need to examine the factors that affect V_R . However, this is made easy for you. Similarly with V_1 , all the factors that can affect V_R can be found by examining page 18 and 19 of section 4 in CAP 698. On page 18 and 19 examine the second table from the top. This table lists the three V speeds, including V_R against the aeroplane mass. This table can show us what the effect of certain factors is. For example, let's look at what aeroplane mass does to V_R .

If the aeroplane mass was 50,000 kg, V_R would be 131 knots under density column A, but if the mass was increased to 65,000 kg then V_1 would increase to 155 knots. Therefore, increasing mass increases V_R .

The next factor to affect V_R is the aeroplane configuration. Page 18 lists the V speeds for 5 degrees flaps and page 19 lists the V speeds with 15 degrees of flap. Therefore comparing the speeds from these two pages, should tell us the effect of the flaps. On page 18, which is 5 degrees flap, a 55,000 kg mass requires a V_R speed of 139 knots, but on page 19, which is 15 degree flap and for the same mass of 55,000 kg, the V_R speed is now 131 knots. Therefore we can see that increasing the flap angle, decreases V_R .

The next factor to affect V_R is density. On page 17 of section 4 is the density graph, You may recall that band A is a high density band, whereas band F equates to lower density. We can now use these bands to see the effect density has on V_R . Returning to page 18, Taking a mass of 50,000 kg in band A, which is high density, V_R is 131 knots, but in band B, C, D and E, the value of V_R is increasing. Therefore we can state that as density decrease, V_R increases.

In modern airliners, V_R is calculated not by looking at speed tables, but it will be computed by the aeroplane once the relevant data is inserted in the flight management computer or multipurpose computer display unit. Once V_1 and V_R have been calculated by the pilots, they can be entered into the Flight Management System and thereafter shown to the pilots in the speed scale on the left hand side of the Primary Flight Display (PFD) or Electronic Attitude Director Indicator (EADI).

Effects of early and over-rotation

If the aircraft is rotated to the correct attitude but at too low a speed, lift off will not occur until the normal V_{LOF} , but there will be higher drag during the increased time in the rotated attitude, giving increased distance to lift off. Rotation to an attitude greater than the normal lift off attitude could bring the wing close to its ground stalling angle. Ground stall should not be possible with leading edge devices correctly set, so it is of extreme importance that these devices are set to the take-off position.

JAR 25.107 requires:

- the take-off distance using a rotation speed of 5 knots less than V_R shall not exceed the take-off distance using the established V_R
- reasonable variations in procedures such as over rotation and out of trim conditions must not result in marked increases in take-off distance.

Note: The expression 'marked increase' in the take-off distance is defined as any amount in excess of 1% of the scheduled distance. (ACJ No.2 to JAR 25.107e4)

V_{2MIN} :

The minimum take-off safety speed, with the critical engine inoperative.

V_{2MIN} May not be less than:

- $1.13 V_{SR}$ for 2 and 3 engine turboprops and all turbojets without provision for obtaining a significant reduction in the one engine inoperative power-on stalling speed OR $1.08 V_{SR}$ for turboprops with more than 3 engines and turbojets with provision for obtaining a significant reduction in the one engine inoperative power-on stalling speed.
- $1.1 V_{MC}$

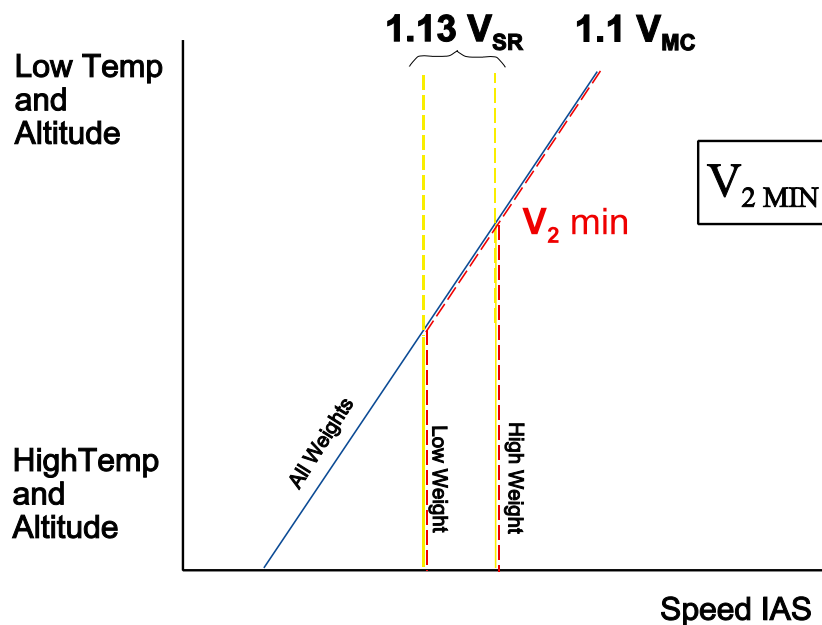


Figure 13.4

V_2 - Take-Off Safety Speed

The speed V_2 is called the take-off safety speed. On page 3 of section 4 of CAP 698 it states that V_2 is the target speed to be attained with one engine inoperative. In other words, V_2 must be reached at or prior to the screen height. Why is V_2 called the take-off safety speed, what is safe about reaching it?

There are two main speeds which when flying close to, may be unsafe. The first of these is stall speed and the second is the minimum control speed. Therefore, in order for V_2 to be called a safe speed it must be a faster than these speeds. There is another reason why V_2 is called the take-off safety speed. In the event of engine failure, V_2 must be flown until the aeroplane reaches 400 ft. Therefore, the other safe feature about V_2 is that the aeroplane is able to achieve a positive climb. In fact, V_2 is the slowest speed which will enable the aeroplane to have sufficient excess thrust to climb above the minimum acceptable climb gradients.

V_2 may not be less than:

- V_{2MIN}
- V_R plus the speed increment attained up to 35 ft.

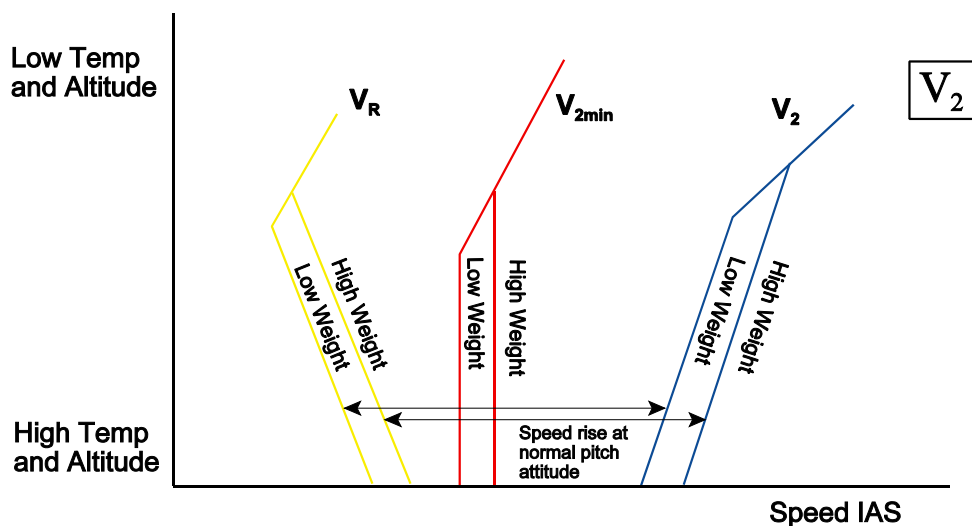


Figure 13.5

To analyse all the factors that can affect V_2 turn to page 18 and 19 of section 4 in CAP 698. You will recall from a similar discussion on V_1 and V_R that these pages can show the effect of mass, configuration and density on V_2 . So ensure you can use these pages to see for yourself how these factors change V_2 .

Once V_2 is calculated by the pilots it can be entered into the flight management computer just like V_1 and V_R were. Having done this V_2 will be displayed to the pilots in the speed scale on the left hand side of the Primary Flight Display or Electronic Attitude Director Indicator.

V_3

The steady initial climb speed with all engines operating.

PRESENTATION OF DATA

A complete analysis of take-off performance requires account to be taken of any stopway and clearway available. As this is time consuming and will often give a maximum permissible take-off mass in excess of that required, simplified data is often presented to permit a rapid assessment of the take-off mass. One method of doing this is to use balanced field data.

BALANCED FIELD

A balanced field exists if the Take-off Distance is equal to the Accelerate-stop Distance. An aerodrome which has no stopway or clearway has a balanced field. For an aeroplane taking off, if an engine failure occurs, the later the engine fails, the greater will be the accelerate-stop distance required but the less will be the take-off distance required. At some speed the two distances will be equal. Figure 13.6 shows the variation of these distances graphically.

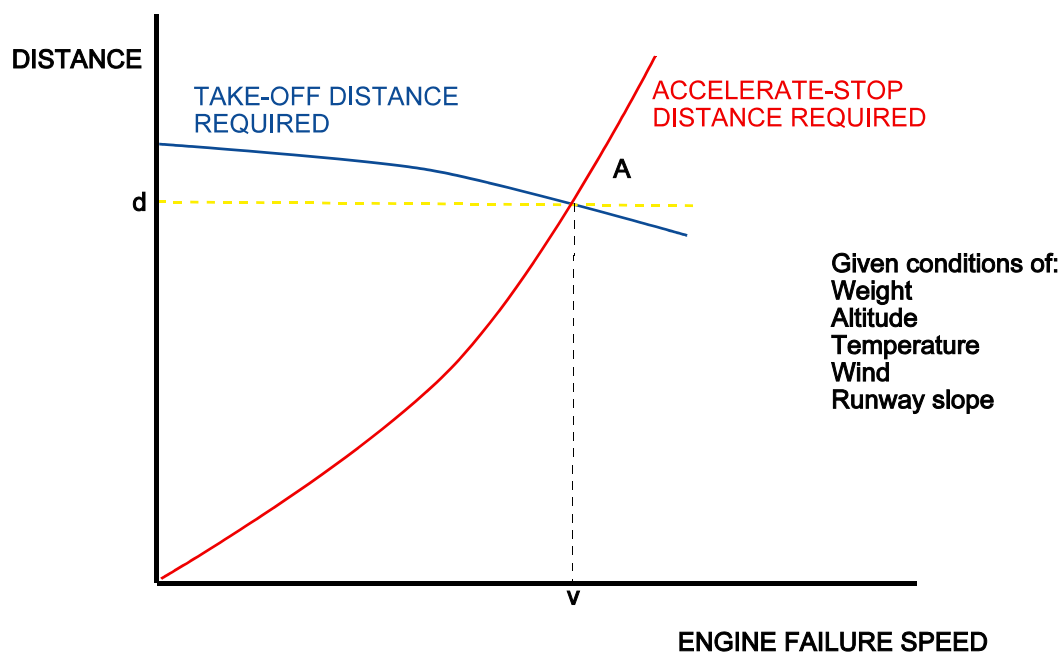


Figure 13.6

The distance, point A in Figure 13.6 is the balanced field length required for the prevailing conditions. It represents the maximum distance required for those conditions, because at whatever speed the engine fails, the distance is adequate, either to stop, if the failure occurs before V_1 or to complete the take-off if the failure occurs after V_1 .

UNBALANCED FIELD.

For a given weight and conditions, the balanced field V_1 will give the optimum performance, since the TODR and the ASDR are equal. In some circumstances however this V_1 will not be acceptable, as V_1 must lie within the limits of V_{MCG} , V_R and V_{MBE} . The following situations will give an unbalanced field:

- V_1 less than V_{MCG}

At low weights and altitudes V_1 for the balanced field may be less than V_{MCG} . In this case V_1 would have to be increased to V_{MCG} and so the TODR would be less, and the ASDR would be greater than the balanced field length. The field length required would be equal to the ASDR at V_{MCG}

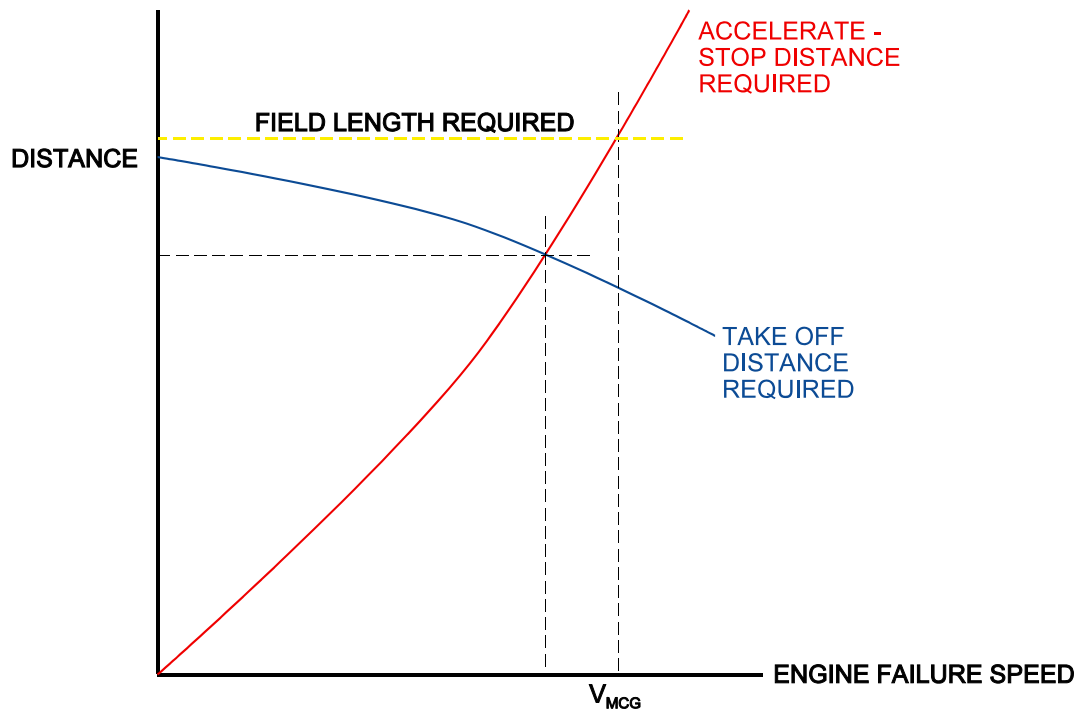


Figure 13.7

- V_1 greater than V_{MBE}

At high weight, altitude and temperature, the balanced field V_1 may exceed the V_{MBE} . V_1 would have to be reduced to V_{MBE} giving a TODR greater, and an ASDR which is less, than the balanced field length. The field length required would be equal to the TODR at V_{MBE} .

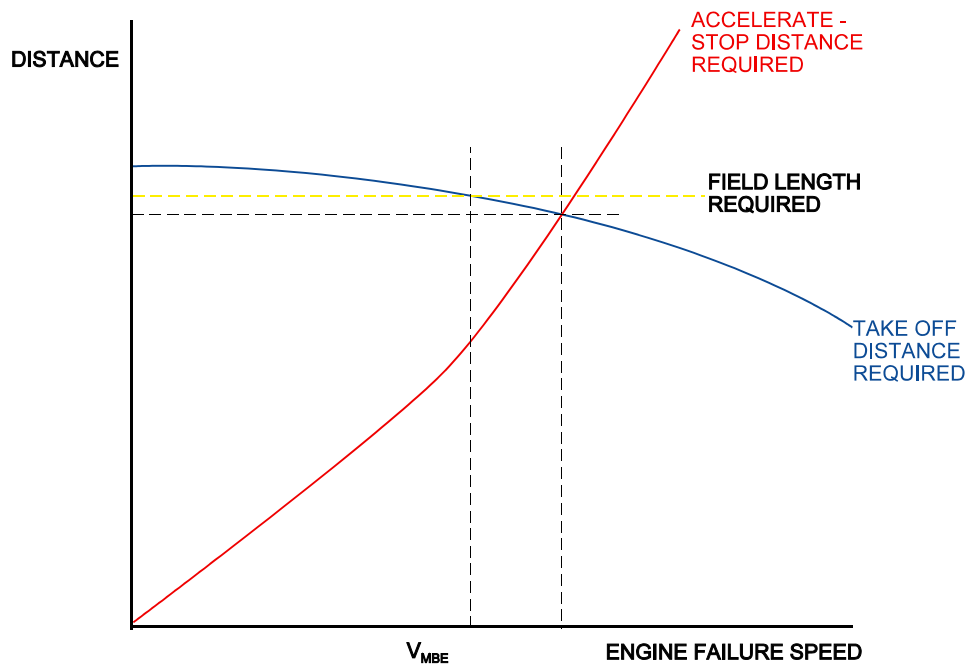


Figure 13.8

- V_1 greater than V_R

For aircraft with good braking capabilities, the stopping distance will be short, giving a high balanced field V_1 speed. If this exceeds V_R for the weight, V_1 will have to be reduced to V_R and the field length required will be equal to the TODR at V_R .

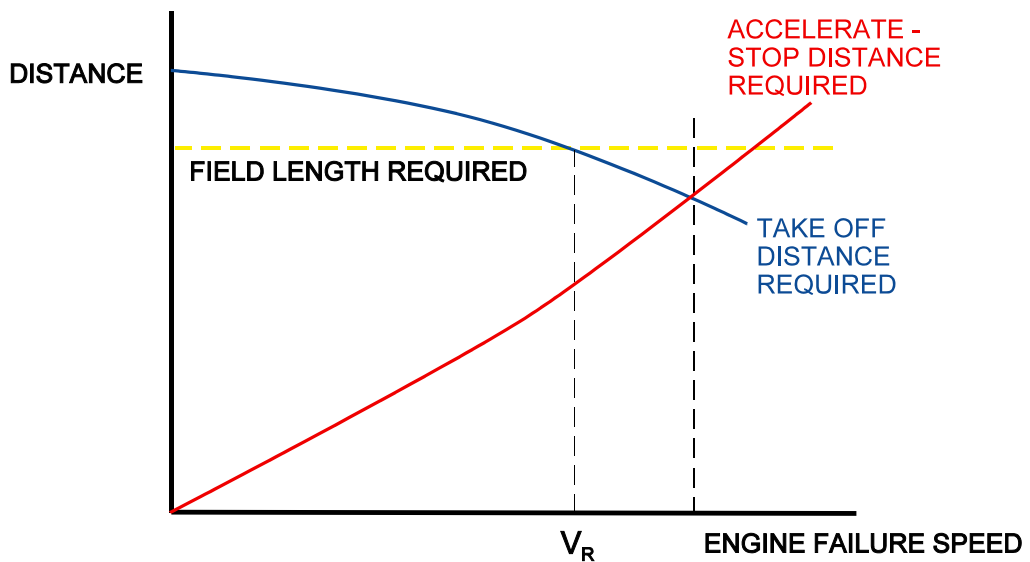


Figure 13.9

V₁ RANGE

If the balanced field available is greater than the balanced field required for the required take-off mass and conditions there will be a range of speed within which V₁ can be chosen. This situation is illustrated in Figure 13.10.

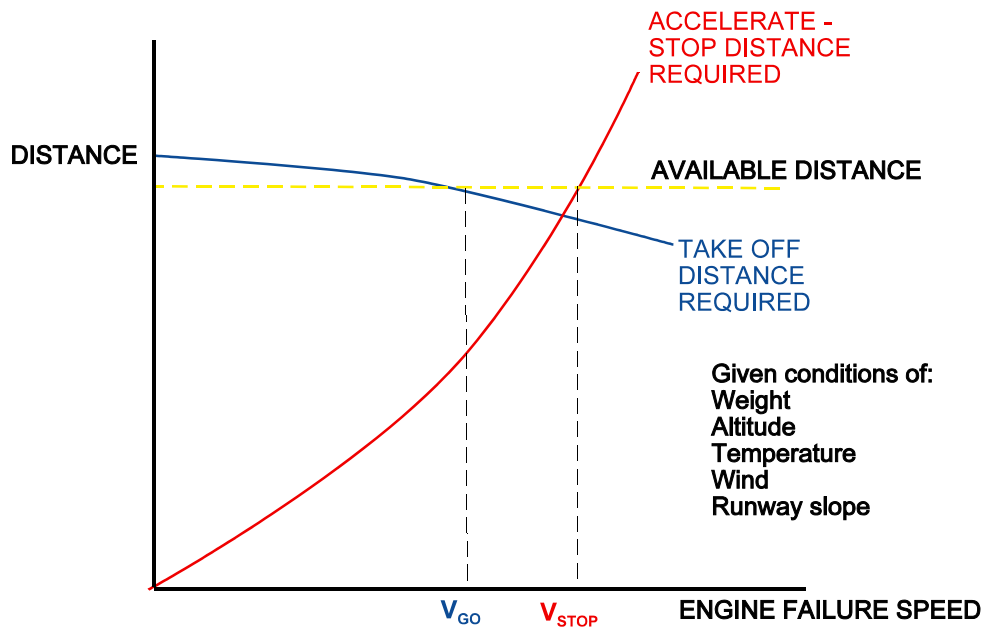


Figure 13.10

V_{GO} is the first speed at which the take-off can be completed within the distance available, and V_{STOP} is the last speed at which the accelerate-stop could be completed within the distance. The V₁ speed can therefore be chosen anywhere between V_{GO} and V_{STOP}.

TAKE-OFF FROM AN UNBALANCED FIELD

If the take-off aerodrome is not a balanced field, the balanced field data can be used by assuming a balanced field equal to the lesser of the Take-off Distance Available and the Accelerate-stop Distance Available. This distance may exceed the Take-off Run Available unless the TORA becomes limiting. The take-off mass obtained will of course be less than that which could have been obtained by taking account of stopway and clearway, but if the mass is sufficient for the flight, it will not be necessary to go into a more detailed analysis.

FIELD LIMIT BRAKE RELEASE MASS / FIELD LIMIT MASS

This section of the chapter will focus on calculating the various limiting masses for take-off. Class A aeroplanes have data presented to the pilot in a different way than smaller class B aeroplanes. Whereas Class B aeroplane data for take-off would show what length of runway would be used for any given mass, Class A aeroplane data shows what maximum mass could be taken for a given runway length. This makes sense since Class A aeroplanes are used commercially and the interest of the airlines is to carry the maximum payload possible for the flight. Therefore most performance graphs or tables will give a mass as their outcome. The first of these performance masses is the Field Limit brake release Mass.

The field limit brake release mass is the maximum mass that will allow the aeroplane to meet its field length requirements at the airfield concerned. Therefore, to be heavier than the field limit mass would mean that either the one engine inoperative or the all engine operative take-off run, take-off distance or accelerate stop distance exceeds the available distance at the airfield.

If you remember, airfields can have different length of take-off run, take-off distance and accelerate stop distance available. Therefore, there should be many mass graphs. There should be mass graphs for ensuring that the mass is such that the take-off run required is within the take-off run available, that the take-off distance required is within the take-off distance available and lastly another mass to ensure the accelerate stop distance required is within the accelerate stop distance available. However, there is only one graph and only one assumed available distance to calculate the field limit mass. The reason is for simplicity. The graph assumes that the take-off run available, the take-off distance available and the accelerate stop distance available are the same length even though the take-off distance available and accelerate stop distance available maybe longer. Therefore no stopways or clearways are accounted for. When the take-off distance available and the accelerate stop distance available are the same, the field is described as being balanced. In this case the balanced field length also happens to be the same length as the take-off run available because there are no stopways or clearways assumed. To use the graph, make sure you only enter the take-off run available as the length of field available.

An example of a typical balanced field length graph is shown in figure 13.11. This graph is the exactly like the one shown in CAP 698 on page 9 of section 4. Notice at the bottom of the graph there is only one field distance to enter the graph with but of course an airfield has many distances, such as the TODA and the ASDA. Because there is only one distance to enter into the graph it must be balanced field length. The introduction to the graph is at the top of page 7 of section 4 in CAP 698 and it reiterates that the graph assumes a balanced field. For unbalanced fields use the information under paragraph 2.5.1 on page 16 of section 4. This latter information is for adjusting V_1 when the field is unbalanced.


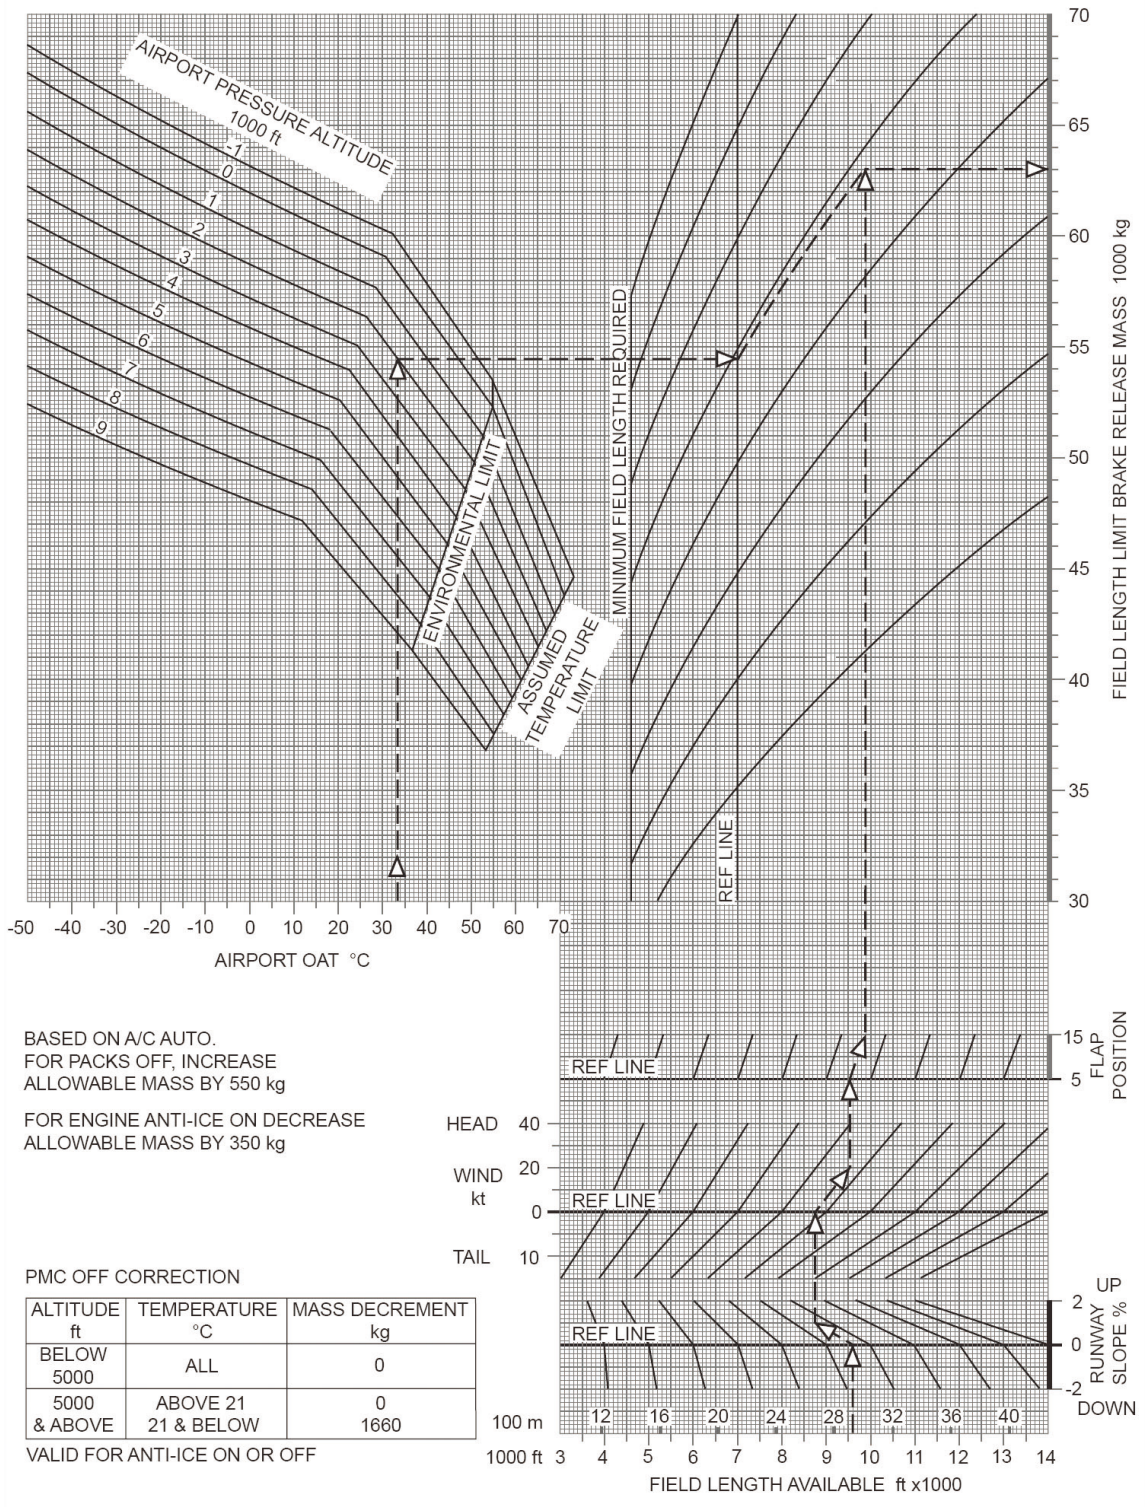


Figure 13.11 Field Limit Mass

CLIMB GRADIENT LIMIT MASS

The field limit mass is not the only mass that must be considered in the take-off, there are several more. The next mass to consider is the Climb Limit break release mass. The graph for calculating this mass is figure 4.5 which is on page 11 of section 4 in CAP 698. The Climb limit mass is sometimes referred to as the Weight Altitude Limit or Mass Altitude Temperature limits, abbreviated to the WAT or MAT limit. Before we work through the climb limit mass graph let's try and understand what this mass means. The climb limit mass is the maximum mass that will enable the aeroplane to achieve a certain minimum climb performance. This minimum climb performance is the most severe of the climb gradient requirements. The most severe climb gradient requirement is in fact 2.4% which will be covered later. In other words, if the mass of aeroplane was greater than the climb limit mass then the aeroplane may still be able to climb, but it will not achieve the minimum air gradients that the authorities have laid down. In other words the aeroplane would not achieve the climb requirements. The gradients for the climb requirements will be discussed in the next chapter but remember that these gradients are air gradients and are therefore unaffected by wind. Figure 13.12 shows a typical presentation of the climb limited take-off mass and is found in CAP 698 on page 11 of section 4.

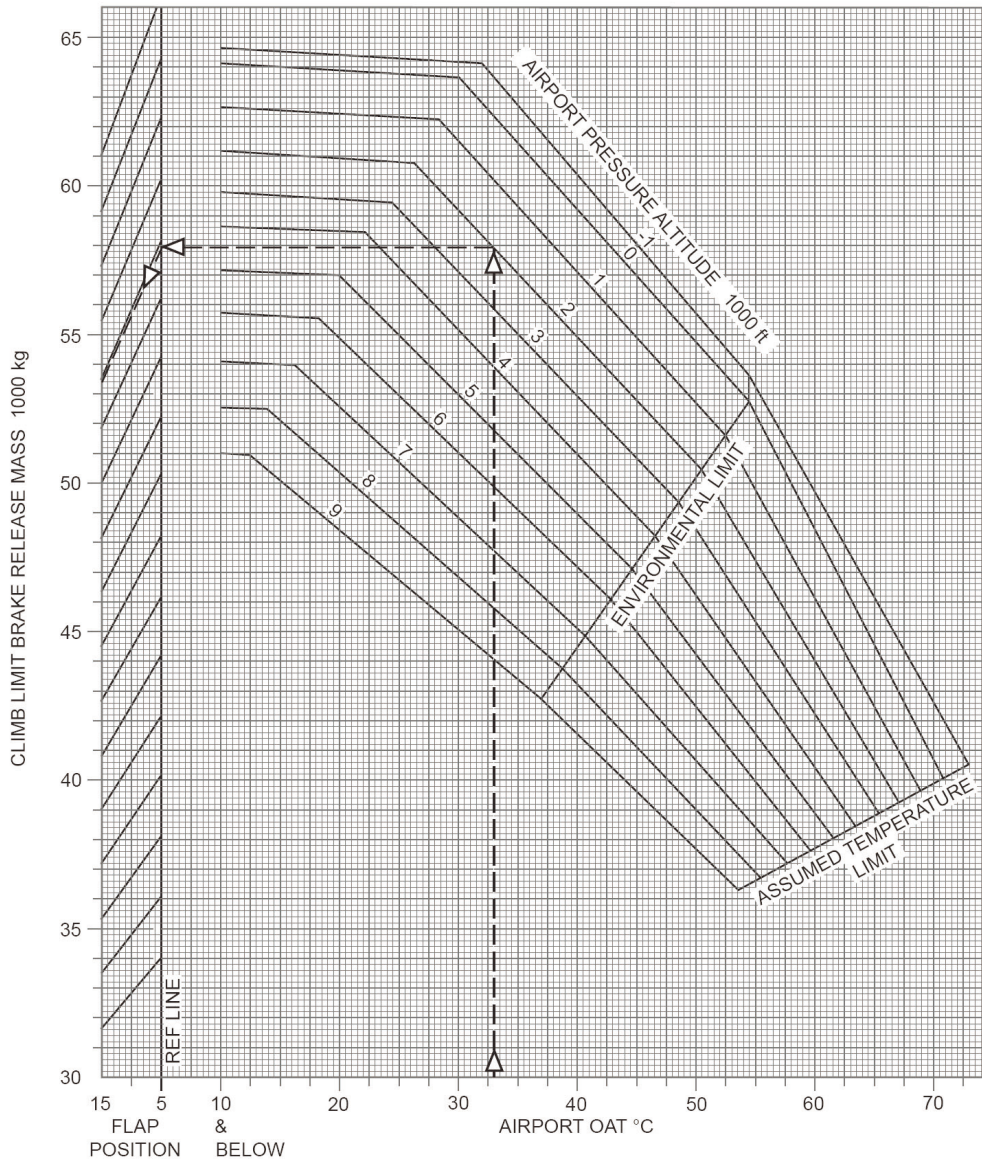

BASED ON A/C AUTO WITH APU ON OR OFF. FOR PACKS OFF, INCREASE ALLOWABLE MASS BY 900 kg.
 FOR OPERATION WITH ENGINE ANTI-ICE ON SUBTRACT 190 kg WHEN AIRPORT PRESSURE ALTITUDE IS AT OR BELOW 8000 ft OR 530 kg WHEN AIRPORT PRESSURE ALTITUDE IS ABOVE 8000 ft.


PMC OFF CORRECTION

ALTITUDE ft	TEMPERATURE °C	MASS DECREMENT kg
BELOW 5000	ALL	0
5000 & ABOVE	ABOVE 21 21 & BELOW	0 1860

Figure 13.12 Take-off Climb Limit / Climb Limit Mass

TYRE SPEED LIMIT MASS

The reason for a tyre speed limit is because naturally there is resistance between the wheel and the runway. As the wheel rotates this resistance generates heat. The greater the wheel speed and or the greater the load on the wheel, the greater the heat generated. Too much heat will not only disintegrate the tyre but it may also expand the air within the tyre and may over pressurise it. This is dangerous and may result in a tyre blow out, although there are fusible plugs in modern tyres to help prevent this. As you can now understand, there is a maximum ground speed and maximum mass that the wheels can be subject to. The maximum ground speed that the tyre will experience will be at V_{LOF} , and as a result, tyre speed limits are designed to be greater than or equal to the fastest V_{LOF} . For most medium range jets the maximum tyre speed limit is set at 195 knots which is about 225 miles per hour. Figure 13.13 shows a typical presentation of the tyre speed limited take-off mass and is found in CAP 698 on page 13 of section 4.

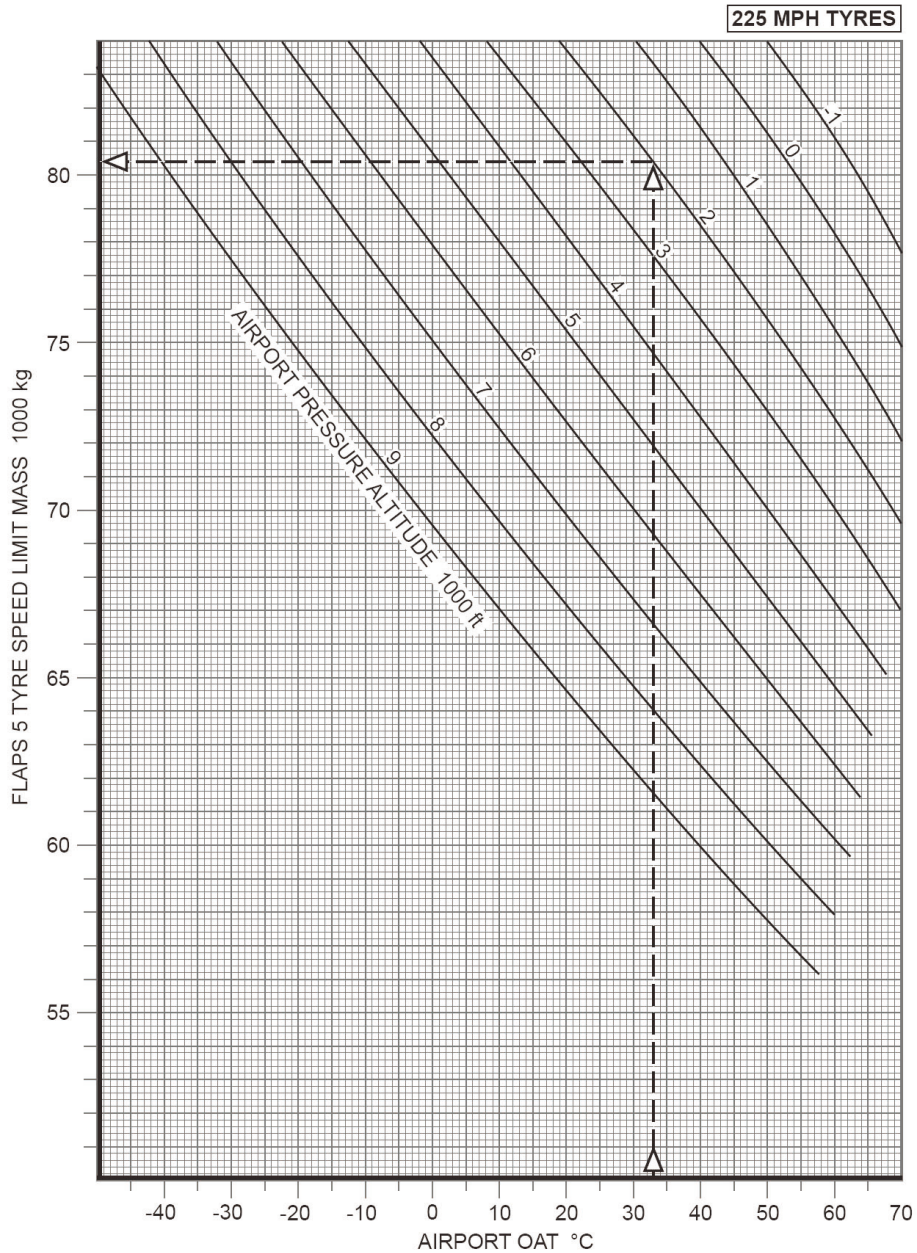

CONDITIONAL DEVIATION	CORRECTION
15° Flap	+ 6600 kg
210 mph Tyres	- 9600 kg
15° Flap + 210 mph Tyres	- 1500 kg
Headwind	+ 400 kg per kt
Tailwind	-650 kg per kt

PMC OFF CORRECTION


ALTITUDE ft	TEMPERATURE °C	MASS DECREMENT kg
Below 5000	Above 21	250
	21 & Below	210
5000 & Above	Above 21	200
	21 & Below	270

Figure 13.13 Tyre Speed Limit Mass

BRAKE ENERGY LIMIT

For an aircraft of mass M , travelling at a true speed of V , the kinetic energy is $\frac{1}{2} MV^2$. If the aircraft is braked to a stop from this speed, a large proportion of this energy will go into the brakes as heat. The energy capacity of the brakes is limited and so for a given mass there will be a limiting speed from which a stop can be made. This will be a True Ground Speed, and so the corresponding IAS will vary with altitude, temperature and wind. Runway slope will also affect the speed, as a change in height involves a change in potential energy.

The brake energy limit speed V_{MBE} must not be less than the V_1 speed. If it is, the mass must be reduced until V_1 and V_{MBE} are the same. The Flight Manual will give the amount of weight to be deducted for each knot that V_1 exceeds V_{MBE} . For most aircraft, V_{MBE} will only be limiting in extremely adverse conditions of altitude, temperature wind and runway slope. In fact if you look at Figure 13.14 you will notice a grey area in the graph on the top left hand side. If the mass and pressure altitude falls within this grey area then V_{MBE} will not be limiting. The same graph can be seen in CAP 698 on page 15 of section 4.

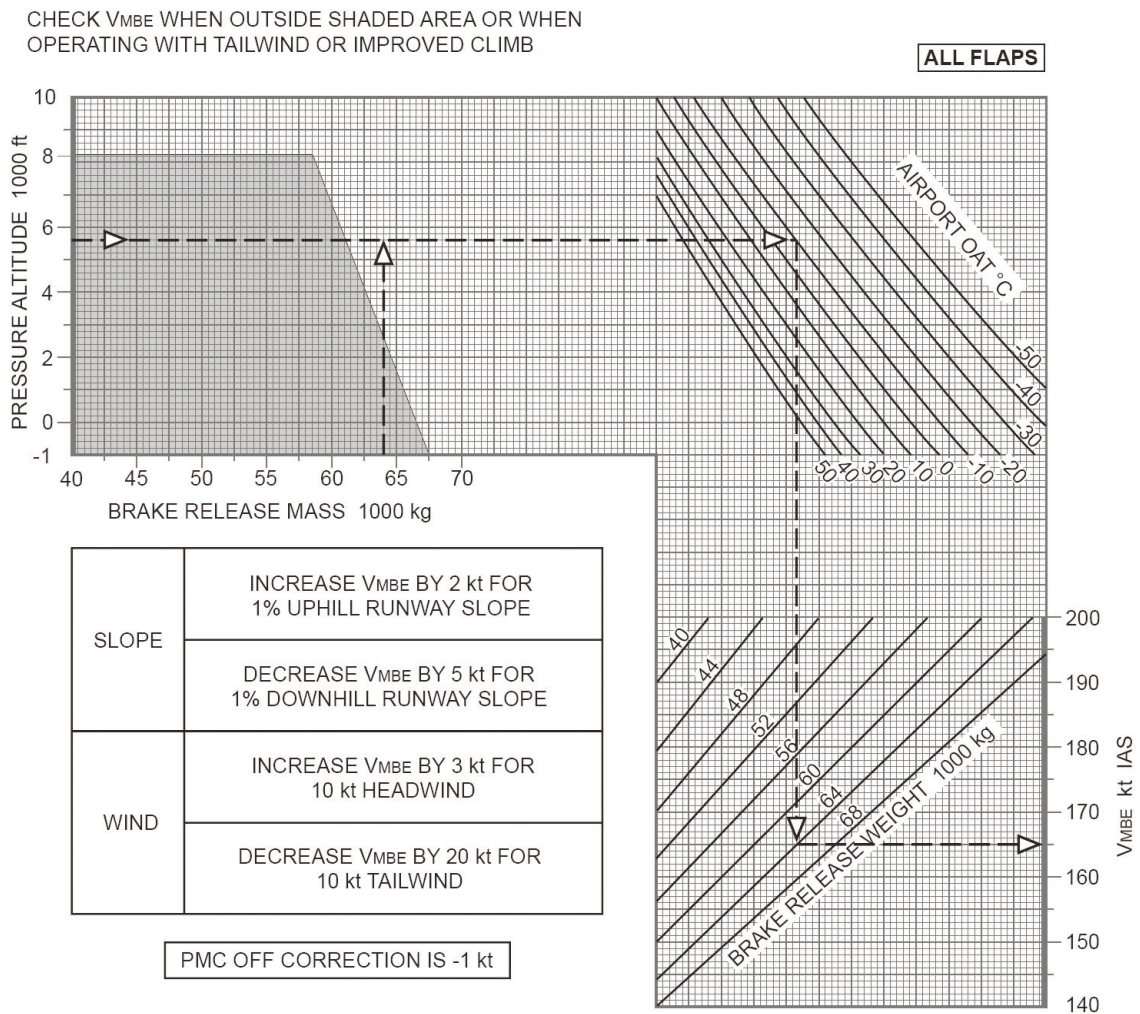

ADJUST V_{MBE} FOR SLOPE AND WIND


NORMAL TAKE-OFF: DECREASE BRAKE RELEASE MASS BY 300 kg FOR EACH KNOT V_1 EXCEEDS V_{MBE} . DETERMINE NORMAL V_1 , V_R , V_2 SPEEDS FOR LOWER BRAKE RELEASE MASS

IMPROVED CLIMB TAKE-OFF: DECREASE CLIMB MASS IMPROVEMENT BY 160 kg FOR EACH KNOT V_1 EXCEEDS V_{MBE} . DETERMINE V_1 , V_R , V_2 SPEED INCREMENTS FOR THE LOWER CLIMB MASS IMPROVEMENT

Figure 13.14 Brake Energy Limit

BRAKE COOLING

The value of V_{MBE} obtained from the data assumes that the brakes are at ambient temperature before the start of take-off. If a take-off is abandoned following a recent landing, or after prolonged taxiing the brakes will already be at a fairly high temperature, and their ability to absorb further energy will be reduced. Data is given in the Manual to show the time to be allowed for the brakes to cool. AN example of a brake cooling graph is shown in figure 13.15 and it can also be found in CAP 698 on page 50 of section 4.

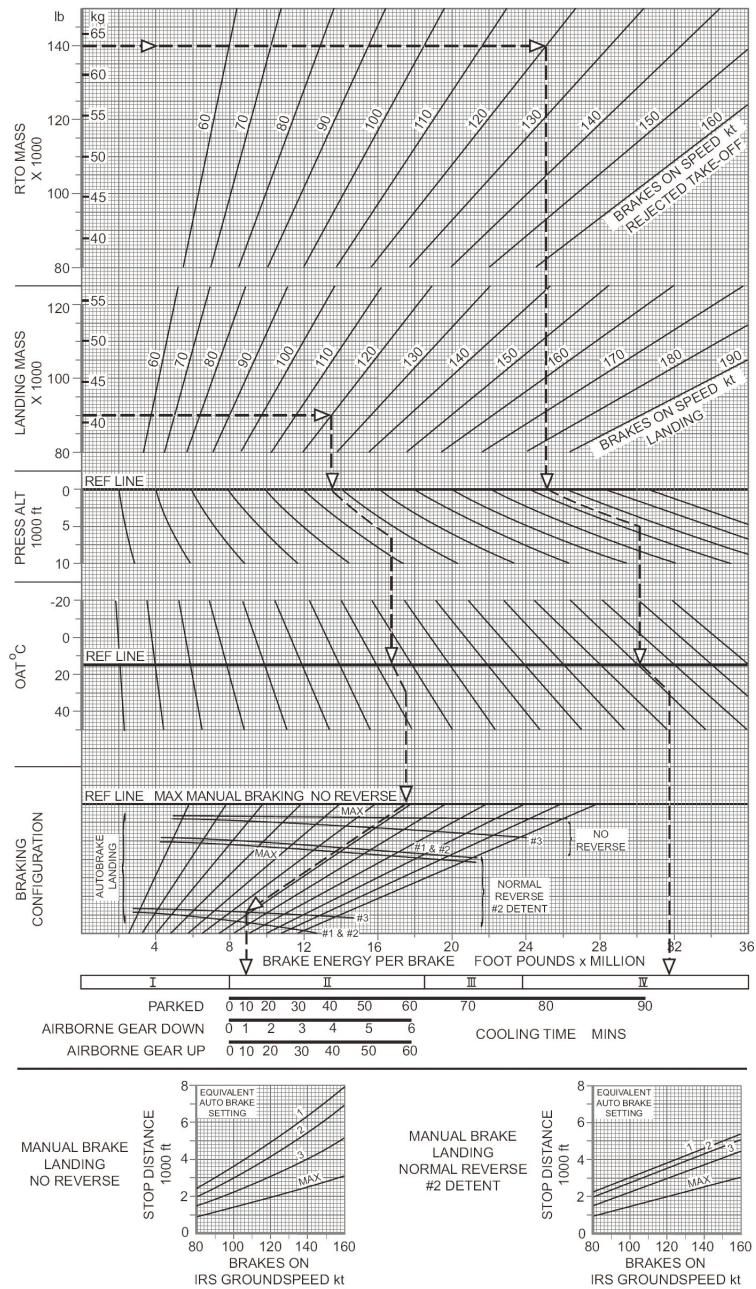

- | | |
|---|---|
| <p>I NORMAL</p> <p>II COOLING RECOMMENDED</p> <p>III CAUTION</p> <p>IV FUSE PLUG MELT</p> | <p>No special procedure required.</p> <p>Cool as scheduled. Ground cooling schedule recommended prior to take-off.</p> <p>Wheel fuse plugs may melt. Delay take-off and inspect after 30 minutes. After take-off, extend gear for at least 7 minutes.</p> <p>No reverse thrust or braking configuration credit allowed in this area. Clear runway immediately. Do not set parking brake. Do not approach gear or attempt taxi or subsequent take-off before waiting mandatory time shown on quick turnaround limit chart. Alert fire equipment.</p> |
|---|---|

Figure 13.15 Shows a typical brake cooling schedule

RUNWAY STRENGTH

The operating mass of the aircraft may be limited by runway strength considerations. The bearing strength of a pavement is expressed by a PCN (Pavement Classification Number) and this is compared to the ACN (Aircraft Classification Number). The UK system of classification is the LCN (Load Classification Number) but this can be converted into the PCN system. The PCN is compared to the ACN. Operation on the pavement is permissible if the ACN is less than or equal to the PCN. Because the PCN includes a safety factor, a 10% increase of ACN over PCN is generally acceptable for pavements that are in good condition and occasional use by aircraft with ACN's up to 50% greater than the PCN may be permitted. In such circumstances the movement of the aircraft must be very closely monitored for damage to the aeroplane and pavement.

MAXIMUM TAKE-OFF MASS

Consideration of the mass determined by the field length available, the climb requirement, the tyre speed limit, and the brake energy limit will determine the maximum mass for take-off. It will be the lowest of the masses given by the above limitations. This mass is called the Performance Limited Mass. The Performance Limited Mass must then be compared to maximum structural mass and the lower of the two masses is then selected as the take-off mass. This mass is known as the Regulated Take-off Mass.

If there are obstacles to be considered on the take-off flight path this may determine a further limitation on take-off mass. Analysis of obstacle clearance limited mass is examined in Chapter 15.

CALCULATING TAKE OFF SPEEDS AND THRUST SETTINGS

When the maximum permissible take-off mass (regulated take-off mass) has been determined, it is necessary to find the corresponding take-off speeds and thrust settings. CAP 698 on page 17, 18, 19 and 20 of section 4 show the presentation of the take-off speeds V_1 , V_R and V_2 and the % N1 for take off.

TAKE-OFF SPEEDS

Having chosen the regulated take-off mass, which for the purpose of an example we shall assume is 57900 kg, we are now able to select the take-off V speeds of V_1 , V_R and V_2 . Before we calculate these speeds the speed band needs to be selected. At the bottom of page 17 of section 4 of CAP 698 is a small table and is reproduced in figure 13.16. This graph is the density correction graph for the take-off V speeds. As an example, let us assume a temperature of 25 degrees Celsius at an aerodrome pressure altitude of 2,000 ft. In our example, the speed band to use is speed band B.

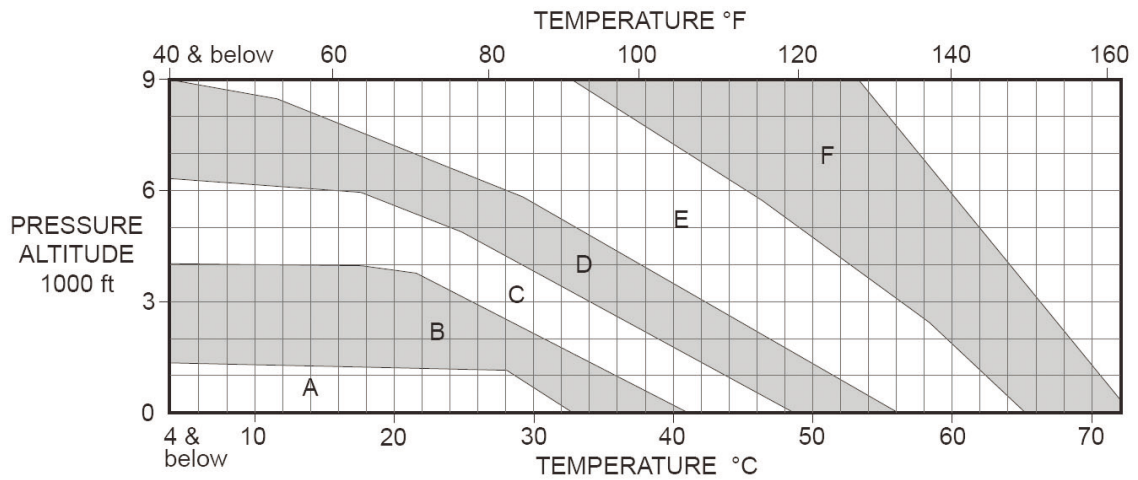


Figure 13.16 The density band selection for the take-off V speeds.

Turning over the page in CAP 698 from page 17 of section 4 to page 18 and 19 you can see the speed tables. There are two sets of speed tables. The one on page 18 is for a 5 degree flap setting and page 19 is for a 15 degree flap setting. For our example we will assume 5 degree flaps with a regulated take-off mass of 57,900 kg. Using the speed tables for a 5 degree flap (page 18 section 4) identify the column for speed band B (should be roughly in the middle of the page). This is reproduced for you in figure 13.17 and the areas to concentrate on are highlighted in red for you.

Mass (1000 kg)	A			B			C		
	V ₁	V _R	V ₂	V ₁	V _R	V ₂	V ₁	V _R	V ₂
70	158	163	168	158	164	169			
65	151	155	161	152	156	162	153	157	162
60	144	148	155	145	148	155	146	149	155
55	137	139	149	138	140	149	138	141	148
50	129	131	142	130	132	142	131	133	142
45	121	123	136	122	124	135	122	125	135
40	113	114	130	113	116	129	113	116	128

Figure 13.17

The left hand scale of the speed table is mass. Notice that our example regulated take-off mass of 57,900 kg lies between the 55,000kg and 60,000 kg marks. Therefore interpolation must be used when working out our V speeds. V₁ for 55,000 kg is 138 knots and for 60,000 kg V₁ is 145. Correct interpolation for 57,900 kg would make V₁ equal to 142.06 knots which should be rounded but we will do this shortly.

Carrying out the same exercise for V_R makes V_R for 57,900 kg equal to 145 knots and V₂ equal to 152 knots.

However, V₁ must be corrected for slope and wind as shown in the table at the top of the page 18 and again is reproduced for you in figure 13.18

Slope/Wind V_1 adjustment						
Mass (1000 kg)	Slope %			Wind kt		
	DOWNSLOPE -2	0	UPSLOPE 2	TAILWIND -15	0	HEADWIND 40
70	-3	0	4	-3	0	1
60	-2	0	2	-3	0	1
50	-2	0	1	-4	0	1
40	-2	0	1	-4	0	1

* V_1 not to exceed V_R

Figure 13.18 Slope and Wind adjustment for V_1

For a 2% upslope and a mass of 57,900 kg, interpolation shows that V_1 must be increased by 1.79 knots. For a 20 knot headwind, V_1 must be increased by 0.5 of a knot. Therefore the total correction to V_1 is to increase it by 2.29 knots. Adding 2.29 knots to the original V_1 of 142.06 that we calculated earlier makes V_1 to be 144.35 knots, which is rounded to 144 knots. Having finished with V_1 , V_R and V_2 , there are two other speeds to check just though. The first is V_{MCG} .

Looking further down the page you can see the table for calculating V_{MCG} which is reproduced for you in figure 13.19

V_{MCG}

Actual OAT		Press. Alt. X 1000 ft				
°C	°F	0	2	4	6	8
55	131	104				
50	122	107	103			
40	104	111	107	103	99	94
30	86	116	111	107	104	98
20	68	116	113	111	107	102
10	50	116	113	111	108	104
-50	-58	118	115	112	109	105

For A/C packs 'off' increase V_{MCG} by 2 knots

Figure 13.19 The V_{MCG} table

Using 25°C and 2000 ft as our pressure altitude would make V_{MCG} to be 112 knots. Remember from our theory that V_1 must not be less than V_{MCG} which in our example it isn't.

Lastly the speed V_{MBE} also needs calculating. The graph for this is on page 15 of section 4 of CAP 698. We have already described this graph and how to use it. Using figure 13.14, if we use our example airfield conditions of 2000 ft pressure altitude, 25°C and our regulated take-off mass of 57,900 kg then the V_{MBE} is 175 knots. However, there are some corrections to make. In our example we had a 2% upslope, this means we need to increase V_{MBE} by 4 knots. There is also a wind correction to be made. In our example we assume a 20 knot headwind and this means V_{MBE} must increase by 6 knots. The total correction would increase V_{MBE} to 185 knots.

All the relevant take-off V speeds have now been calculated based upon our regulated take-off mass of 57,900 kg.

CORRECTION FOR STOPWAY AND CLEARWAY

The speeds shown in the tables that we have just used are based on a balanced field length (TORA = TODA= ASDA) and are not valid if the take-off mass has been derived using stopway or clearway. Where this is the case the V_1 may be adjusted for the effects of stopway or clearway from the table below.

	Normal V_1 KIAS			
Clearway Minus Stopway (ft)	100	120	140	160
800	-	-	-3	-2
600	-	-3	-2	-1
400	-4	-3	-2	-1
200	-2	-1	-1	0
0	0	0	0	0
-400	1	1	1	1
-800	1	1	1	1

Maximum Allowable Clearway

Field Length (ft)	Maximum Allowable Clearway for V_1 Reduction (ft)
4000	400
6000	500
8000	550
10000	600
12000	700
14000	750

Figure 13.20

THRUST SETTING (% N₁)

The thrust setting values as shown in CAP 698 on page 20, 21, 22 and 23 of section 4. Use the tables on these pages to select the appropriate thrust setting for take-off and for the climb using the conditions at the airfield.

STABILISER TRIM SETTING

The stabiliser trim setting appropriate to the C.G. position and take-off mass can be read from the table below and are shown in CAP 698 at the bottom of pages 18 and 19 of section 4.

Flaps 5° Stabiliser Trim Setting

CG. % MAC	6	10	14	18	22	26	30
Stab. Trim	5 ½	5	4 ½	3 ¾	3 ¼	2 ¾	2 ¼

For masses at or below 45350 kg subtract ½ unit

For masses at or above 61250 kg add ½ unit

Stab trim settings must be between 1 and 5 ¾ units

Figure 13.21

QUESTIONS

1. For a given take-off mass, the maximum brake energy limit speed (VMBE), as an indicated airspeed, will:
 - a. Decrease with increasing altitude, and decrease with increasing temperature.
 - b. Increase with increasing altitude and increase with increasing temperature.
 - c. Decrease with increasing altitude, and increase with increasing temperature.
 - d. Not change with altitude, but decrease with increasing temperature.

2. Provided all other parameters stay constant. Which of the following statements will decrease the take-off ground run?
 - a. Decreased take-off mass, increased pressure altitude, increased temperature.
 - b. Decreased take-off mass, increased density, increased flap setting.
 - c. Increased pressure altitude, increased outside air temperature, increased take-off mass.
 - d. Increased outside air temperature, decreased pressure altitude, decreased flap setting.

3. A multi engine aeroplane is flying at the minimum control speed (VMCA). Which parameter(s) must be maintainable after engine failure?
 - a. Heading, altitude and a positive rate of climb of 100 ft/min.
 - b. Altitude.
 - c. Straight flight.
 - d. Straight flight and altitude.

4. How is VMCA influenced by increasing pressure altitude?
 - a. VMCA decreases with increasing pressure altitude.
 - b. VMCA increases with pressure altitude higher than 4000 ft.
 - c. VMCA increases with increasing pressure altitude.
 - d. VMCA is not affected by pressure altitude.

5. Which of the following speeds can be limited by the 'maximum tyre speed'?
 - a. Lift-off groundspeed.
 - b. Lift-off IAS.
 - c. Lift-off TAS.
 - d. Lift-off EAS.

6. A higher outside air temperature (OAT):
 - a. decreases the brake energy limited take-off mass.
 - b. increases the field length limited take-off mass.
 - c. increases the climb limited take-off mass.
 - d. decreases the take-off distance.

7. The take-off performance requirements for Class A transport category aeroplanes are based upon:
- failure of critical engine.
 - failure of critical engine or all engines operating which ever gives the largest take-off distance.
 - all engines operating.
 - only one engine operating.
8. Maximum and minimum values of V1 can be limited by:
- VR and VMCG
 - V2 and VMCA
 - VR and VMCA
 - V2 and VMCG
9. During the certification flight testing of a twin engine turbojet aeroplane, the actual demonstrated take-off distances are equal to:
1,547 m with all engines operating
1,720 m with failure of the critical engine at V1 and with all other things remaining unchanged.
The take-off distance adopted for the certification file is:
- 1,547 m.
 - 1,720 m.
 - 1,779 m.
 - 1,978 m.
10. The minimum value that V2 must exceed "air minimum control speed" is by:
- 15%
 - 20%
 - 30%
 - 10%
11. With regard to a take-off from a wet runway, which of the following statements is correct?
- Screen height cannot be reduced.
 - The screen height can be lowered to reduce the mass penalties.
 - When the runway is wet, the V1 reduction is sufficient to maintain the same margins on the runway length.
 - In case of a thrust reverser inoperative, the wet runway performance information can still be used.
12. Balanced V1 is selected:
- for a runway length limited take-off with a clearway to give the highest mass.
 - if it is equal to V2.
 - if the accelerate stop distance required is equal to the one engine out take-off distance required.
 - for a runway length limited take-off with a stopway to give the highest mass.

13. How is V_2 affected if take-off flaps at 20° is chosen instead of take-off flaps at 10° ?
- V_2 increases in proportion to the angle at which the flaps are set.
 - V_2 has no connection with take-off flap setting, as it is a function of runway length only.
 - V_2 decreases if not restricted by VMCA.
 - V_2 has the same value in both cases.
14. Which statement regarding the influence of a runway down-slope is correct for a balanced take-off? Down-slope:
- increases V_1 and reduces the accelerate stop distance required (ASDR).
 - reduces V_1 and increases the accelerate stop distance required (ASDR).
 - increases V_1 and increases the take-off distance required (TODR).
 - reduces V_1 and reduces take-off distance required (TODR).
15. Ignoring the minimum control speed limitation, the lowest take-off safety speed (V_2 min) is:
- 1.15 V_s for all turbojet aeroplanes.
 - 1.20 V_s for all turboprop powered aeroplanes.
 - 1.13 VSR for two-engined and three-engined turbo-propeller powered aeroplanes;
 - 1.13 VSR for turbo-propeller powered aeroplanes with more than three engines.
16. During the flight preparation a pilot makes a mistake by selecting a V_1 greater than that required. Which problem will occur when the engine fails at a speed immediately above the correct value of V_1 ?
- The stop distance required will exceed the stop distance available.
 - The one engine out take-off distance required may exceed the take-off distance available.
 - V_2 may be too high so that climb performance decreases.
 - It may lead to over-rotation.
17. The speed V_2 of a jet aeroplane must be greater than: (assume the aeroplane has provisions for obtaining a significant reduction in the one-engine-inoperative power-on stall speed)
- 1.13 VMCG.
 - 1.05 VLOF.
 - 1.3 V_1 .
 - 1.08 VSR.
18. When an aircraft takes off with the mass limited by the TODA or field length:
- the actual take-off mass equals the field length limited takeoff mass.
 - the distance from brake release to V_1 will be equal to the distance from V_1 to the 35 feet point.
 - the "balanced take-off distance" equals 115% of the "all engine take-off distance".
 - the end of the runway will be cleared by 35 feet following an engine failure at V_1 .

19. A runway is contaminated by a 0.5 cm layer of wet snow. The take-off is nevertheless authorized by a light-twin's flight manual. The take-off distance in relation to a dry runway will be:
- very significantly decreased.
 - increased.
 - unchanged.
 - decreased.
20. What will be the influence on the aeroplane performance at higher pressure altitudes?
- It will increase the take-off distance.
 - It will decrease the take-off distance.
 - It will increase the take-off distance available.
 - It will increase the accelerate stop distance available.
21. During certification test flights for a turbojet aeroplane, the actual measured take-off runs from brake release to a point equidistant between the point at which VLOF is reached and the point at which the aeroplane is 35 feet above the take-off surface are:
1,747 m, all engines operating
1,950 m, with the critical engine failure recognized at V1, and all the other factors remaining unchanged.
Considering both possibilities to determine the take-off run (TOR). What is the correct distance?
- 1,950 m.
 - 2,009 m.
 - 2,243 m.
 - 2,096 m.
22. Given that:
VEF = Critical engine failure speed
VMCG = Ground minimum control speed
VMCA = Air minimum control speed
VMU = Minimum un-stick speed
V1 = Take-off decision speed
VR = Rotation speed
V2 min. = Minimum take-off safety speed
The correct formula is?
- 1.05 VMCA is less than or equal to VEF, VEF is less than or equal to V1
 - 1.05 VMCG is less than VEF, VEF is less than or equal to VR
 - V2min is less than or equal to VEF, VEF is less than or equal to VMU
 - VMCG is less than or equal to VEF, VEF is less than V1
23. If the field length limited take off mass has been calculated using a Balanced Field Length technique, the use of any additional clearway in take-off performance calculations may allow:
- a greater field length limited take off mass but with a higher V1.
 - the obstacle clearance limit to be increased with no effect on V1.
 - the obstacle clearance limit to be increased with an higher V1.
 - a greater field length limited take off mass but with a lower V1.

24. The result of a higher flap setting up to the optimum at take-off is:
- a higher V_1 .
 - a longer take-off run.
 - a shorter ground roll.
 - an increased acceleration.
25. For class A aeroplanes the take-off run is:
- the horizontal distance along the take-off path from the start of the take-off to a point equidistant between the point at which VLOF is reached and the point at which the aeroplane is 35 ft above the take-off surface.
 - 1.5 times the distance from the point of brake release to a point equidistant between the point at which VLOF is reached and the point at which the aeroplane attains a height of 35 ft above the runway with all engines operative.
 - 1.15 times the distance from the point of brake release to the point at which VLOF is reached assuming a failure of the critical engine at V_1 .
 - the distance of the point of brake release to a point equidistant between the point at which VLOF is reached and the point at which the aeroplane attains a height of 50 ft above the runway assuming a failure of the critical engine at V_1 .
26. Which statement is correct for a Class A aeroplane?
- VR must not be less than 1.05 VMCA and not less than 1.1 V_1 .
 - VR must not be less than 1.05 VMCA and not less than V_1 .
 - VR must not be less than VMCA and not less than 1.05 V_1 .
 - VR must not be less than 1.1 VMCA and not less than V_1 .
27. During certification flight testing on a four engine turbojet aeroplane the actual take-off distances measured are:
2,555 m with all engines operating
3,050 m with failure of the critical engine recognised at V_1 and all other things being equal.
The take-off distance adopted for the certification file is:
- 3,050 m
 - 3,513 m
 - 2,555 m
 - 2,938 m
28. When the outside air temperature increases, then:
- the field length limited take-off mass decreases but the climb limited take-off mass increases.
 - the field length limited take-off mass increases but the climb limited take-off mass decreases.
 - the field length limited take-off mass and the climb limited take-off mass decreases.
 - the field length limited take-off mass and the climb limited take-off mass increases.
29. In case of an engine failure which is recognized at or above V_1 :
- the take-off should be rejected if the speed is still below VR.
 - the take-off must be continued.
 - the take-off must be rejected if the speed is still below VLOF.
 - a height of 50 ft must be reached within the take-off distance.

30. VR cannot be lower than:
- 105% of V1 and VMCA.
 - 1.2 Vs for twin and three engine jet aeroplane.
 - 1.15 Vs for turbo-prop with three or more engines.
 - V1 and 105% of VMCA.
31. If the performance limiting take-off mass of an aeroplane is brake energy limited, a higher uphill slope would:
- have no effect on the maximum mass for take-off.
 - decrease the required take-off distance.
 - increase the maximum mass for take-off.
 - decrease the maximum mass for take-off.
32. In which of the following distances can the length of a stopway be included?
- In the accelerate stop distance available.
 - In the one-engine failure case, take-off distance.
 - In the all-engine take-off distance.
 - In the take-off run available.
33. In the event of engine failure below V1, the first action to be taken by the pilot in order to decelerate the aeroplane is to:
- apply wheel brakes.
 - deploy airbrakes or spoilers.
 - reduce the engine thrust.
 - reverse engine thrust.
34. The climb limited take-off mass can be increased by:
- selecting a lower VR.
 - a lower flap setting for take-off and selecting a higher V2.
 - selecting a lower V1.
 - selecting a lower V2.
35. Which is the correct sequence of speeds during take-off?
- V1, VR, V2, VMCA.
 - VMCG, V1, VR, V2.
 - V1, VMCG, VR, V2.
 - V1, VR, VMCG, V2.
36. Which of the following distances will increase if you increase V1?
- All Engine Take-off distance.
 - Take-off run.
 - Accelerate Stop Distance.
 - Take-off distance.

37. If the value of the balanced V_1 is found to be lower than $VMCG$, which of the following is correct?
- a. The ASDR will become greater than the one engine out take-off distance.
 - b. The take-off is not permitted.
 - c. The one engine out take-off distance will become greater than the ASDR.
 - d. The $VMCG$ will be lowered to V_1 .
38. For this question use Figure 4.4 in CAP 698 Section 4.
For an example twin engine turbojet aeroplane two take-off flap settings (5° and 15°) are certified.
Given:
Field length available = 2,400 m
Outside air temperature = -10°C
Airport pressure altitude = 7,000 ft
The maximum allowed take-off mass is:
- a. 55,000 kg
 - b. 70,000 kg
 - c. 52,000 kg
 - d. 56,000 kg

ANSWERS

- | | | | | | |
|-----|---|-----|---|-----|---|
| 1. | A | 16. | A | 31. | C |
| 2. | B | 17. | D | 32. | A |
| 3. | C | 18. | A | 33. | C |
| 4. | A | 19. | B | 34. | B |
| 5. | A | 20. | A | 35. | B |
| 6. | A | 21. | B | 36. | C |
| 7. | B | 22. | D | 37. | B |
| 8. | A | 23. | D | 38. | D |
| 9. | C | 24. | C | | |
| 10. | D | 25. | A | | |
| 11. | B | 26. | B | | |
| 12. | C | 27. | A | | |
| 13. | C | 28. | C | | |
| 14. | D | 29. | B | | |
| 15. | C | 30. | D | | |

CHAPTER FOURTEEN

CLASS A: ADDITIONAL TAKE OFF PROCEDURES

Contents

NON STANDARD TAKE-OFF PROCEDURES	395
CONTAMINATED RUNWAYS	395
TAKE-OFF WITH INCREASED V_2 SPEED	398
TAKE-OFF WITH REDUCED THRUST	399
TAKE-OFF WITH ANTI-SKID INOPERATIVE	401
QUESTIONS	402
ANSWERS	404

NON STANDARD TAKE-OFF PROCEDURES

The procedure to determine the take-off mass, take-off speeds, and thrust settings for the normal take-off procedure is given in the previous chapter. Chapter 14 gives additional procedures to cover:

- take-off with contaminated runway
- take-off with increased V₂ speed
- take-off with reduced thrust
- Take-off with anti-skid inoperative

However, most of these procedures can be found in CAP 698 on page 24 to 34 of section 4. Do not worry about having to remember too much about these procedures, CAP 698 adequately details and describes not only the theory of the procedures but also the methodology of each procedure.

CONTAMINATED RUNWAYS

This procedure is detailed on page 24 of section 4 in CAP 698. A runway is considered to be contaminated when more than 25% of the runway surface area (whether in isolated areas or not) within the required length and width being used, is covered by surface water, more than 3mm. deep, or by slush or loose snow, equivalent to more than 3mm. of water.

Slush, loose snow or standing water on the runway will affect both the Take-off distance Required and the Accelerate-stop Distance Required. The Take-off Distance Required will increase because of the additional wheel drag and impingement drag. The accelerate-stop distance will increase because of the increased distance to decelerate and the increased distance to stop resulting from the reduced runway coefficient of braking friction. For given distances available, the maximum take-off mass and the V₁ will therefore be reduced compared to the dry runway. The greater the depth of contamination, the greater the mass reduction and the less the V₁ reduction.

The supplementary performance information required by JAR-OPS 1 should include accelerate-stop distance, take-off distance and take-off run appropriate to the relevant contaminant, derived in a similar manner to those distances with a wet runway.

The acceleration distance should take account of the additional drag due to the gear displacement drag, and the spray impingement drag, and the decrease of drag which occurs above the aquaplaning speed. For rotating tyres or tyres going from a dry surface to a flooded surface, the hydroplaning speed (VP) is calculated using the formula below

$$9 \sqrt{\text{TYRE PRESSURE (psi)}}$$

The hydroplaning speed for non rotating tyres or to find the speed below which the aquaplaning will stop is shown below.

$$7.7 \sqrt{\text{TYRE PRESSURE (psi)}}$$

PROCEDURE

Use either the figures below or the tables shown in CAP 698 on page 25, 26 and 27 of section for the following description of the procedure to follow for contaminated runways.

0.08 Inch (2mm) Slush/Standing Water Depth

Mass x 1000kg	Mass and V ₁ Reductions			
	Press Alt (ft)	0	4000	8000
40	1000 kg	2.9	3.4	4.0
	KIAS	22	21	19
44	1000 kg	3.7	4.2	4.9
	KIAS	22	21	18
48	1000 kg	4.3	5.0	5.8
	KIAS	21	19	17
52	1000 kg	4.9	5.7	6.5
	KIAS	20	18	15
56	1000 kg	5.6	6.3	7.0
	KIAS	18	16	14
60	1000 kg	6.1	6.8	7.3
	KIAS	16	15	12
64	1000 kg	6.6	7.2	7.6
	KIAS	16	13	10
68	1000 kg	6.9	7.5	8.2
	KIAS	13	11	8

Field Length Available (ft) (TORA)	V ₁ = V _{MCG} Limit Mass 1000 kg		
	Pressure Altitude (ft)		
	0	4000	8000
5600	39	-	-
5800	42	34	-
6000	45	37	-
6200	49	39	-
6400	52	42	-
6600	55	45	36
6800	59	47	39
7000	62	50	41
7200	65	53	43
7400	69	56	46
7600	-	59	48
7800	-	62	51
8000	-	65	53
8200	-	68	56
8400	-	71	58
8600	-	-	61
8800	-	-	64
9000	-	-	66

Figure 14.1 Sample data for a runway with 2mm contamination

The Determination of Take-Off Mass

- a) Calculate the normal limiting take-off mass for a dry runway i.e., field length limit, climb limit or obstacle limit.
- b) Select the table(s) appropriate to the depth of contaminant (interpolating if necessary).
- c) Enter the left column of the **top** table at the normal limiting take-off mass, travel right to the aerodrome pressure altitude column. Interpolate for mass and pressure altitude, if necessary. Extract the mass reduction. Calculate maximum take-off mass for a contaminated runway by subtracting the mass reduction from the normal performance limiting take-off mass.
- d) If in the shaded area, proceed to the bottom table. Enter the left column with the take-off run available (TORA), move right to the appropriate aerodrome pressure altitude column. Interpolate as necessary. Extract the maximum permissible takeoff mass. Make $V_1 = V_{MCG}$.
- e) The lower of the two values from c) and d) above is the maximum take-off mass for a contaminated runway.
- f) Calculate all the V speeds for the actual take-off mass as given in e).
- g) If not in the shaded area in c) above, then re-enter the left table at the actual mass to determine the V_1 reduction to be made.
- h) Apply the reduction to V_1 . If adjusted V_1 is less than V_{MCG} take-off is not permitted.

TAKE-OFF WITH INCREASED V_2 SPEED

This particular procedure is used when the performance limiting mass is the climb limit mass. In other words, the climb performance is poor and is severely restricting the potential mass of the aeroplane. Before we start, it is important to understand that in the event of engine failure, the initial climb out speed is V_2 . However, V_2 is not the best climb angle speed. V_2 is considerably slower than the best angle of climb speed, which, if you recall is called V_X . As an example, for a typical new generation 737, V_X is 80 knots faster than V_2 ; therefore climbing out at V_2 produces a climb angle much less than if the aeroplane were to climb out at V_X .

What the improved climb procedure aims to achieve is to increase V_2 to be closer to V_X . This will greatly enhance the climb performance. Understanding the concepts of the increased V_2 procedure would be best illustrated by working through an example where the field limit mass is 61,000 kg and the climb limit mass is 52,000 kg. The performance limited mass is always the lower mass and therefore the mass for take-off must be 52,000 kg. This is a shame, since the runway can allow a far greater mass. Therefore, taking off with only 52,000 kg would mean there would be a significant proportion of the runway left. This can provide a clue as to the solution.

With all the excess of runway it would be possible to stay on the runway for longer during the take-off to build up more speed, this will ensure that at rotation and at the screen height, a faster V_2 will be reached and this faster V_2 will be much closer to V_X . This ensures that the climb performance significantly improves. As a result of the improved climb performance, the climb limit mass can increase, which would increase the performance limited take-off mass and provide an improved regulated take-off mass.

The information at the top of page 28 of section 4 in CAP 698 introduces the concept of the procedure very well, so use this introduction in the exam if you are unsure of what the procedure entails. Below this introduction is the detailed methodology of the procedure itself which is reproduced in the next paragraph.

PROCEDURE

Use the graphs shown in CAP 698 on page 29 and 30 of section for the following procedure for an increased V_2 take-off.

- a) Select the set of graphs appropriate to the flap setting on the "improved climb performance field length limit" graph (CAP 698 Figure 4.15).
- b) Enter the relevant left-hand graph with the value of the field length limit mass minus the climb limit mass. Travel vertically up to the normal 'climb limit' mass line.
- c) From this intersection move horizontally left to the vertical axis to read the climb mass improvement and horizontally right to the vertical axis to read the increase to apply to V_1 .
- d) Continue horizontally right to the reference line of the right-hand graph. From this point interpolate and follow the grid lines to reach a vertical input in the right-hand graph of the normal climb limit mass.
- e) From this intersection, travel horizontally right to the vertical axis to read the increase to apply to V_R and V_2 .
- f) Repeat this process in the improved climb performance tyre speed limit graph (CAP 698 Figure 4.16) except that the initial entry point is the tyre limit mass minus the climb limit mass.
- g) The lower of the two mass increases is that which must be used together with its associated speed increases.
- h) Add the mass increase to the normal climb mass limit.
- i) Determine the V speeds for this increased mass.
- j) Apply the speed increases to the appropriate speeds. Check V_{MBE} .

TAKE-OFF WITH REDUCED THRUST

The third additional type of procedure is probably the most common and it is referred to by many different names and is detailed on page 31 of section 4 in CAP 698. Use this page to help you, it describes all the relevant information you need for you. So again, don't worry about having to remember all the information about it.

This third procedure is referred to as the reduced thrust take-off, variable thrust take-off or assumed temperature take-off. However, Airbus uses the term Flexible take-off. The main reason for doing this procedure is to preserve engine life and also to help reduce noise. The procedure can be used any time the actual take-off mass is less than the maximum permissible take-off mass and that there is an available distance that greatly exceeds that which is required. The maximum reduction in thrust from the full rated take-off thrust value is 25%.

Take-off with reduced thrust is not permitted with:

- icy or very slippery runways
- contaminated runways
- ant-skid inoperative
- reverse thrust inoperative
- increased V2 procedure
- PMC off

Reduced thrust take off procedure is not recommended if potential windshear conditions exist.

PROCEDURE

Essentially this procedure involves pretending or assuming that the temperature is a lot hotter than it actually is. Imagine for the moment that the outside air temperature was continually increasing and as a result the thrust produced by the engines continually decreasing. There will eventually be a temperature beyond which there will be insufficient thrust to complete a take-off. This temperature is then used as the assumed temperature and the thrust equating to this temperature is then set as the take-off thrust.

The procedure described below can also be found in CAP 698 on page 31 of section 4.

It is first necessary to determine the most limiting performance condition. The only common parameter to enable comparison is that of temperature. Thus the maximum permissible temperature must be calculated for the actual take-off mass from each of the following:

- field limit graph
- climb limit graph
- tyre-speed limit graph
- obstacle limit graph

From these temperatures, select the lowest and ensure that it does not exceed the environmental limit. If it does, then the environmental limit becomes the assumed temperature.

- a) Calculate the maximum assumed temperature from Figure 4.17 a or b, as appropriate. Enter the left column with the actual ambient temperature and read the maximum temperature in the column appropriate to the aerodrome pressure altitude.
- b) From Figure 4.17c on bottom line, determine the minimum assumed temperature for the aerodrome pressure altitude.
- c) From the same table, for the assumed temperature to be used, determine the maximum take-off % N1. Add 1.0% N1 if air conditioning packs are off. The assumed temperature used must neither exceed the maximum from paragraph a) above nor be below the minimum from paragraph b) above.
- d) Enter the left column of Figure 4.17d with assumed temperature minus ambient temperature. Travel right along the line to the column appropriate to the ambient temperature, interpolating if necessary. Read the % N1 adjustment.
- e) Subtract the value determined at paragraph d) from that at paragraph c) to determine the % N1 to be set at take-off.

TAKE-OFF WITH ANTI-SKID INOPERATIVE (Simplified Method)

The last additional take-off procedure is that used when the anti skid system is inoperative. You may think that this is not important for take-off, but bear in mind, Class A aeroplanes have to demonstrate that in the event of engine failure, the aeroplane is able to stop within the confines of the runway. Therefore the accelerate stop distance required must be less than or equal to the field available. If the anti-skid system doesn't work, then the stopping ability will be severely reduced and will cause the accelerate stop distance to increase dramatically. To solve the problem, V_1 is reduced. You may recall, that reducing V_1 decrease the accelerate stop distance, but the side effect is that it increases the take-off distance (see figure 13.1). To resolve this, the mass of the aeroplane is reduced, which will decrease both the accelerate stop distance and take-off distance required so that they remain within the available field lengths.

In summary then, with the anti-skid system inoperative, V_1 and aeroplane mass must be decreased.

The anti-skid inoperative procedure is detailed on page 34 of section 4 in CAP 698. At the top of that page is a very clear introduction to the procedure and below this is the method of calculating the mass and V_1 reduction

QUESTIONS

1. With regard to a take-off from a wet runway, which of the following statements is correct?
 - a. Screen height cannot be reduced.
 - b. The screen height can be lowered to reduce the mass penalties.
 - c. When the runway is wet, the V1 reduction is sufficient to maintain the same margins on the runway length.
 - d. In case of a thrust reverser inoperative, the wet runway performance information can still be used.

2. For a take-off from a contaminated runway, which of the following statements is correct?
 - a. Dry snow is not considered to affect the take-off performance.
 - b. A slush covered runway must be cleared before take-off, even if the performance data for contaminated runway is available.
 - c. The performance data for take-off is determined in general by means of calculation, only a few values are verified by flight tests.
 - d. The greater the depth of contamination at constant take-off mass, the more V1 has to be decreased to compensate for decreasing friction.

3. Reduced take-off thrust is prohibited when:
 - a. it is dark.
 - b. the runway is wet.
 - c. obstacles are present close to the end of the runway.
 - d. the runway is contaminated.

4. If the antiskid system is inoperative, which of the following statements is true?
 - a. It has no effect on the accelerate stop distance.
 - b. Take-off with antiskid inoperative is not permitted.
 - c. The accelerate stop distance increases.
 - d. The accelerate stop distance decreases.

5. A runway is contaminated by a 0,5 cm layer of wet snow. The take-off is nevertheless authorized by a light-twin's flight manual. The take-off distance in relation to a dry runway will be:
 - a. very significantly decreased.
 - b. B increased.
 - c. unchanged.
 - d. decreased.

6. Reduced take-off thrust is prohibited when:
 - a. the runway is wet.
 - b. the OAT is ISA +10°C.
 - c. anti skid is unserviceable.
 - d. it is dark.

7. Reduced take-off thrust should normally not be used when:
 - a. it is dark.
 - b. the runway is dry.
 - c. the runway is wet.
 - d. windshear is reported on the take-off path.

 8. When V1 has to be reduced because of a wet runway, the one engine out obstacle clearance / climb performance:
 - a. increases / increases.
 - b. remains constant / remains constant.
 - c. decreases / decreases.
 - d. decreases / remains constant.

 9. The climb limited take-off mass can be increased by:
 - a. selecting a lower VR.
 - b. a lower flap setting for take-off and selecting a higher V2.
 - c. selecting a lower V1.
 - d. selecting a lower V2.

 10. Due to a lot of standing water on the runway the field length limited take-off mass will be:
 - a. only higher for three and four engine aeroplanes.
 - b. lower.
 - c. higher.
 - d. unaffected.

 11. Reduced take-off thrust:
 - a. can be used if the headwind component during take-off is at least 10 kt.
 - b. has the benefit of improving engine life.
 - c. can be used if the actual take-off mass is higher than the performance limited take-off mass.
 - d. is not recommended at very low temperatures.

 12. Which statement about reduced thrust is correct?
 - a. In case of reduced thrust V1 should be decreased.
 - b. Reduced thrust can be used when the actual take-off mass is less than the field length limited take-off mass.
 - c. Reduced thrust is primarily a noise abatement procedure.
 - d. Reduced thrust is used in order to save fuel.

 13. What is the effect of a greater contamination depth on the reduction to the take-off mass and the reduction to V1 respectively?
 - a. Increase, decrease
 - b. Decrease, decrease
 - c. Increase, increase
 - d. Decrease, increase
-

ANSWERS

1. B
2. C
3. D
4. C
5. B
6. C
7. D
8. D
9. B
10. B
11. B
12. B
13. A

CHAPTER FIFTEEN

CLASS A: TAKE OFF CLIMB

Contents

TAKE-OFF CLIMB	407
SEGMENTS OF THE TAKE-OFF CLIMB	407
OBSTACLE CLEARANCE	409
NOISE ABATEMENT PROCEDURES	412
QUESTIONS	415
ANSWERS	420

TAKE-OFF CLIMB

The take-off climb or take-off flight path extends from 35 ft above the take-off surface to 1500 ft above the take-off surface. However, with a contaminated runway take-off, the take-off climb begins at 15 ft and not 35 ft. The point on the ground directly below the 35 ft screen is called “reference zero”. There are two main requirements that must be met within the take-off climb and these requirements are based upon an engine failure occurring at V_{EF} . Remember that performance of Class A aeroplanes must account for engine failure in all flight phases.

The first requirement is that the aeroplane must be able to achieve the minimum climb gradients and secondly the aeroplane must be able to maintain sufficient obstacle clearance. Remember that the climb gradient requirements are air based gradients and the obstacle clearance requirement use ground based gradients.

When assessing compliance with the regulations, the manufacturer or operator may either use a continuous demonstrated take-off climb or a segmented take-off climb. Segmenting the take-off climb does make the requirements and the procedure a little easier to comprehend; therefore we will use a segmented take-off climb profile as do most operators and manufacturers.

SEGMENTS OF THE TAKE-OFF CLIMB

The take-off climb is generally split into four unique segments and these are shown in figure 15.1. Each segment is characteristic of a distinct change in aeroplane configuration, speed and or thrust with various actions and climb gradient requirements. Generally there are four segments and you will need to learn what unique characteristics define each segment.

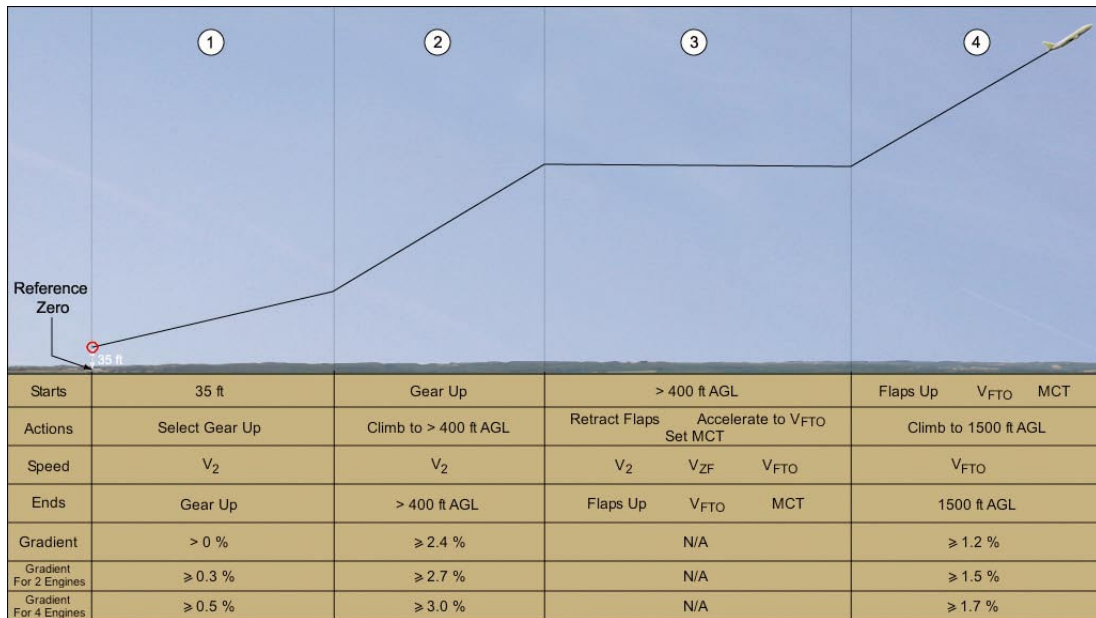


Figure 15.1 The segments of the take-off climb for typical Class A aeroplane.

SEGMENT 1

The take-off flight path starts once the take-off is complete, in other words at 35 ft with aeroplane at V_2 with one engine inoperative. The 35 ft screen marks the start point of segment 1. The objective at this point is to climb, as expeditiously as possible, which is difficult because of the lack of excess thrust due to the large amount drag created by the gear and flaps and the fact that only one engine is in operation. Therefore, the strategy is to retract the gear and flaps as soon as possible. Since retracting flaps at low speeds close to the ground is dangerous, the only option is to retract the gear.

Once the gear is up and locked then the first segment is finished. During this segment the steady gradient of climb must be positive.

SEGMENT 2

The second segment starts at the end of the first segment, i.e. when the gear is up. The objective now is to retract the flaps. However, flap retraction is not permitted below 400 ft, therefore the action by the pilot is simply to climb, at no less than $V_{2'}$ until 400 ft is reached. Once 400 ft is reached and flap retract can commence, segment 2 ends. Since the aeroplane has had the main source of drag removed, the minimum gradient requirement is more severe at no less than 2.4%.

SEGMENT 3

Segment three starts at or above 400 ft and is the flap retraction and acceleration segment. However, retracting the flaps will increase the stall speed. This reduces the aeroplanes safety margin. Therefore, the aeroplane must accelerate during flap retraction from V_2 to the zero flap speed and then to the final take-off speed. The final take-off speed is also called the final segment speed and is intended to be the one engine inoperative best angle of climb speed. Once this has happened, thrust can be reduced from maximum take-off thrust, TOGA, to maximum continuous thrust, MCT. In fact, maximum take-off thrust is limited to only 5 minutes, therefore, acceleration and flap retraction must be complete by then. The acceleration phase of this segment poses a climb problem. To climb, excess thrust is needed. However, accelerating the aeroplane also requires excess thrust. Therefore, it is not possible to adequately accelerate and climb at the same time and, as such, segment three can be flown level as shown by the illustration.

SEGMENT 4

The forth segment starts when the flaps are retracted, the final segment speed is achieved and the thrust is set to maximum continuous thrust. From this point the aeroplane is climbed to above 1500 ft where the take-off flight path ends. The pilot will either rejoin the airfield to land to continue on-route to the take-off alternate. The climb gradient for this last stage must not be less than 1.2%. One last point.

The gradient requirements for Class A aeroplanes with more than two engines forms part of the syllabus and therefore they need to be remember as well. Although we have already mentioned it in the previous chapter, the Climb Limit Mass tells us what the maximum mass of the aeroplane can be to order achieve the minimum gradient requirements. Having a mass greater than the climb limit mass would mean that the aeroplane will not have sufficient performance in the event of engine failure to achieve the climb gradient requirements. The graph to calculate the climb limit mass is on page 11 of section 4 in CAP 698. We have worked through an example in the previous chapter, but none the less ensure you're confident in being able to use this graph. The introduction to the climb section, shown on page 10 of section 4 reiterates the climb requirements and it states that during the take-off climb the aeroplane must:

- a. Attain the most severe gradient requirement of the take-off Net Flight Path and
- b. Avoid all obstacles in the obstacle accountability area by the statutory minimum vertical interval.

Both these requirements have already been mentioned at the beginning of this chapter. The Climb Limit Mass deals with point a. In other words, being at or below the climb limit mass guarantees attainment of the most severe gradient requirement of the take-off flight path. What is the most severe angle of the take-off flight path. The most severe gradient requirement is in segment 2, which for a twin engine jet aeroplane is 2.4%. Therefore the climb limit mass ensures that the aeroplane, in the event of engine failure is able to attain a 2.4% gradient or more. Remember that these climb gradients are air based and therefore independent to the effect of wind. Looking through the climb limit mass graph confirms this since there is no account for wind.

OBSTACLE CLEARANCE

Having discussed the minimum climb gradient requirements and how to ensure the aeroplane attains them, we need to focus on the obstacle clearance requirements. In JAR-OPS 1 it states that an operator must ensure that the net take-off flight path must clear all obstacles by a vertical margin of at least 35 ft. If the aeroplane is unable to do so it must turn away from the obstacle and clear it by a horizontal distance of at least 90 m plus $0.125 \times D$, where D is the horizontal distance the aeroplane has travelled from the end of the take-off distance available.

$$90\text{m} + 0.125 D$$

For aeroplanes with a wingspan of less than 60 m a horizontal obstacle clearance of half the aeroplane wingspan plus 60 m, plus $0.125 \times D$ may be used.

$$60\text{m} + \frac{1}{2} \text{ wing span} + 0.125 D$$

However, obstacles further away than the values shown below need not be considered.

Condition	Maximum Semi-width	
	0° to 15°	Over 15°
Able to Maintain Visual Guidance or same Accuracy	300m.	600 m.
All Other Conditions	600 m	900 m.

We have seen this horizontal clearance information before when we were discussing Class B multi engine obstacle clearance. However, there are two crucial points to consider when trying to work out the vertical clearance.

The first relates to climb gradient, which if you remember, is a ground based gradient. In order to work out the obstacle clearance of the aeroplane, the climb gradient needs to be known. But JAR-OPS 1 states that the climb gradient to use for the purpose of calculating obstacle clearance must be the net climb gradient. Remember that the net gradient is the gross gradient diminished by a safety factor. In this case the safety factor changes depending on the number of engines.

The net gradient is the gross gradient reduced by:

- 0.8% for 2 engined aircraft
- 0.9% for 3 engined aircraft
- 1.0% for 4 engined aircraft

Using the net gradients instead of the gross gradient in the take-off flight path will produce a net take-off flight. As we stated at the beginning, the net take-off flight path must clear all obstacles by 35ft.

The second point to consider is effect of wind on the ground gradient. Headwinds will increase the ground gradient and improve obstacle clearance. Where as tailwinds will decrease the ground gradient and deteriorate the obstacle clearance. JAR-OPS 1 states that when adjusting for wind to calculate the ground gradient, no more than 50% of the reported head wind and no less than 150% of the reported tailwind must be used. Carrying out this rule simply adds another safety margin into the calculation.

We stated that if the aeroplane is unable to clear the obstacle vertically, then, it can turn away from the obstacle and clear it horizontally. However, there is restriction on how much the aeroplane is allowed to turn. Clearly it is not safe if the aeroplane needs to bank sharply to clear the obstacle by the regulatory margins. Turning can increase the effective weight by imposing extra g loads and therefore the climb gradient is reduced and stall speeds are increased. Allowance must be made for the effect of the turn on the climb gradient and speed. The flight manual usually gives a gradient decrement for a 15° banked turn at V₂. For greater bank angles:

- For 20° bank, use 2 x gradient decrement and V₂ + 5 kt
- For 25° bank, use 3 x gradient decrement and V₂ + 10 kt

URNS ON THE FLIGHT PATH

- Turns are not allowed below a height of half the wingspan or 50ft whichever is greater.
- Up to 400ft, bank angle may not be more than 15°.
- Above 400 ft, bank angle may not be more than 25°.

JAR-OPS 1 does permit operators to exceed these bank angles providing the operator uses special procedures and that these procedures have been approved by the relevant authority. The special procedures must take account of the gradient loss from such bank angles and these must be published in the aeroplane flight manual. The maximum bank angles that the special procedures allow is up to 20° between 200 and 400 ft and up to 30 ° between 400 and 1500 ft.

If any turn of more than 15° is required at any point in the take-off flight path, then the vertical clearance is increased to 50 ft instead of 35 ft. Manually working out the obstacle clearance capability of the aeroplane could take a long time, since there are so many points to bear in mind and the calculation itself is quiet lengthy. Thankfully, most operators and manufactures have produced either rapid look up tables or graphs to quickly enable the pilot to work out if an obstacle in the take-off climb will be cleared by the relevant vertical margins following engine failure. These tables or graphs will produce a mass. This mass is called the obstacle limit mass and an example is shown in figure 15.2 which can also be found in CAP 698 on page 36 and 37 of section 4. It is the maximum mass that will allow the aeroplane, in the event of engine failure to clear the obstacle by the relevant vertical margin.

Notice that winds are included into the graph. This is important because obstacle clearance calculations must use ground gradients and these are dependent on wind. In fact, remember that JAR-OPS 1 had a rule about the wind. It stated that when using the winds to work out the ground gradient only use 50% of headwinds and no less than 150% tailwinds. Notice the slope of the headwind and tailwind lines. This shows that the graph applies the wind rule for you. Therefore, if you enter the graph with the actual reported wind the graph corrects it automatically so you don't need to.

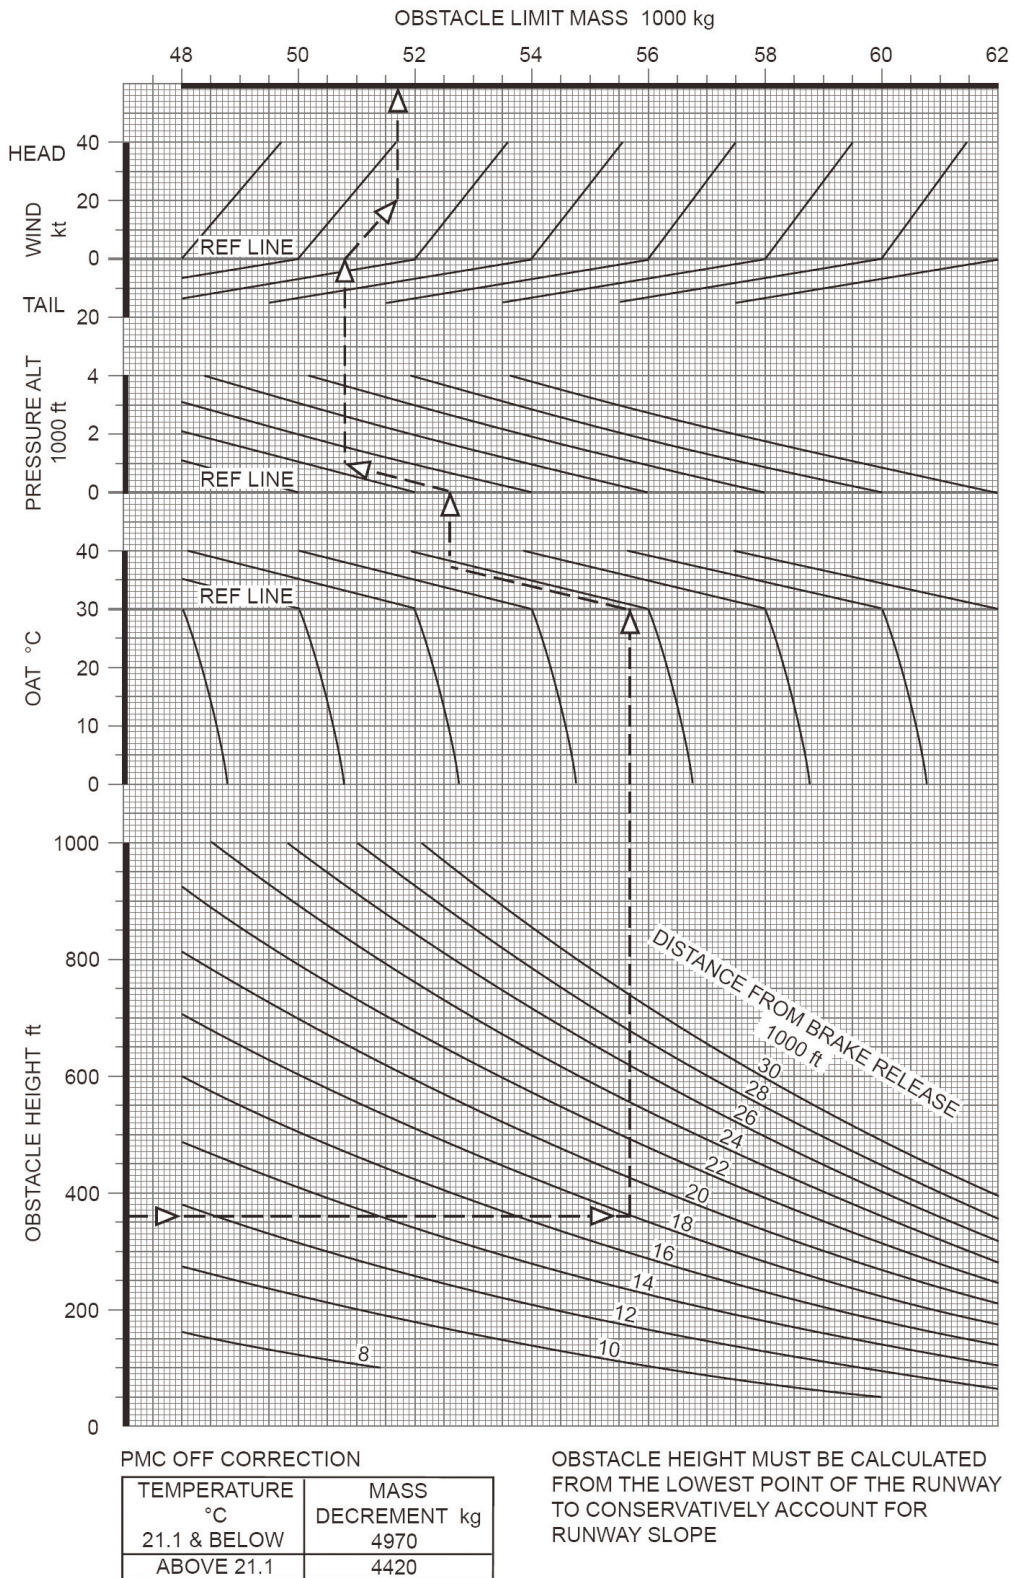


Figure 15.2 Obstacle Limit Mass

Once the details of the obstacle have been entered, as shown by the example, the obstacle limit mass can be read off, and, in the example on the graph itself the obstacle limit mass is 51,700 kg. Taking off with a higher mass than this would not ensure adequate vertical clearance. However, if this mass unduly restricts the take-off mass, then the aeroplane maybe dispatched with a greater mass so long as the aeroplane turns around the obstacle, clearing it by the relevant horizontal margins and does not exceed the turn restrictions when trying to do so.

NOISE ABATEMENT PROCEDURES

Aeroplane operating procedures for the take-off climb shall ensure that the necessary safety of flight operations is maintained whilst minimizing exposure to noise on the ground.

The first procedure (NADP 1) is intended to provide noise reduction for noise-sensitive areas in close proximity to the departure end of the runway (see Figure 15.3). The second procedure (NADP 2) provides noise reduction to areas more distant from the runway end (see Figure 15.4). The two procedures differ in that the acceleration segment for flap/slat retraction is either initiated prior to reaching the maximum prescribed height or *at* the maximum prescribed height. To ensure optimum acceleration performance, thrust reduction may be initiated at an intermediate flap setting.

NADP 1

This procedure involves a power reduction at or above the prescribed minimum altitude and the delay of flap/slat retraction until the prescribed maximum altitude is attained. At the prescribed maximum altitude, accelerate and retract flaps/slats on schedule whilst maintaining a positive rate of climb, and complete the transition to normal en-route climb speed.

The noise abatement procedure is not to be initiated at less than 800 ft above aerodrome elevation. The initial climbing speed to the noise abatement initiation point shall not be less than V_2 plus 20 km/h (10 kt). On reaching an altitude at or above 800 ft above aerodrome elevation, adjust and maintain engine power/thrust in accordance with the noise abatement power/thrust schedule provided in the aircraft operating manual. Maintain a climb speed of V_2 plus 20 to 40 km/h (10 to 20 kt) with flaps and slats in the take-off configuration.

At no more than an altitude equivalent to 3,000 ft above aerodrome elevation, whilst maintaining a positive rate of climb, accelerate and retract flaps/slats on schedule. At 3,000 ft above aerodrome elevation, accelerate to en-route climb speed.

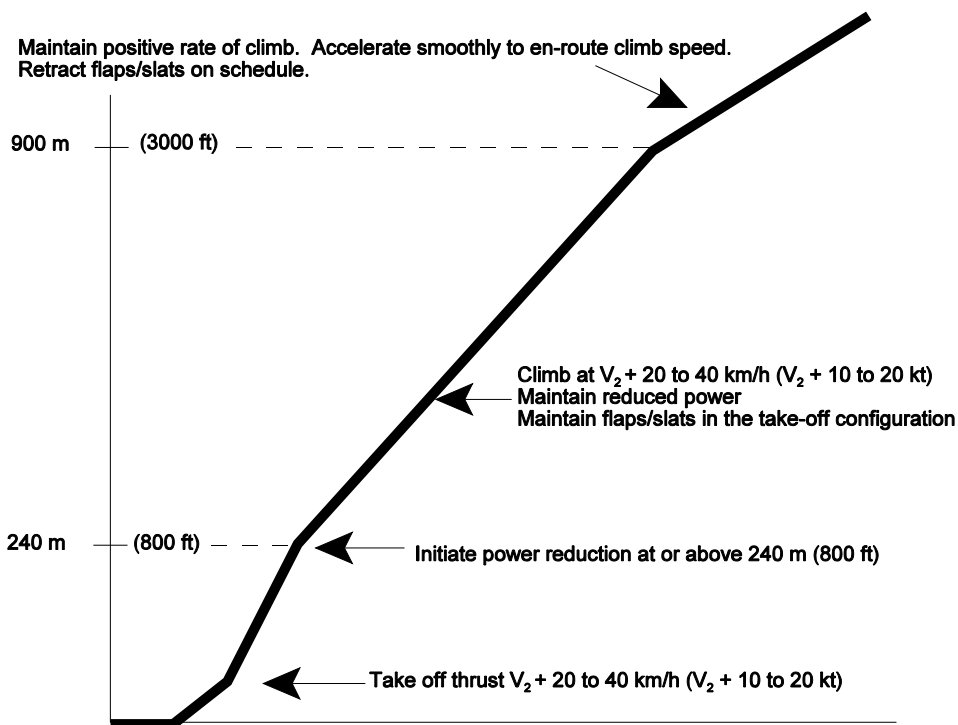


Figure 15.3 Noise Abatement Take-Off Climb - Example of a Procedure Alleviating Noise Close to the Aerodrome (NADP 1)

NADP 2

This procedure involves initiation of flap/slat retraction on reaching the minimum prescribed altitude. The flaps/slats are to be retracted on schedule whilst maintaining a positive rate of climb. The power reduction is to be performed with the initiation of the first flap/slat retraction **or** when the zero flap/slat configuration is attained. At the prescribed altitude, complete the transition to normal en-route climb procedures.

The noise abatement procedure is not to be initiated at less than 800 ft above aerodrome elevation. The noise abatement procedure is not to be initiated at less than 800 ft above aerodrome elevation. The initial climbing speed to the noise abatement initiation point is V_2 plus 20 to 40 km/h (10 to 20 kt). On reaching an altitude equivalent to at least 800 ft above aerodrome elevation, decrease aircraft body angle/angle of pitch whilst maintaining a positive rate of climb, accelerate towards V_{ZF} and either:

- reduce power with the initiation of the first flap/slat retraction; or
- reduce power after flap/slat retraction.

Maintain a positive rate of climb, and accelerate to and maintain a climb speed of $V_{ZF} + 20$ to 40 Km/h (10 to 20 kt) to 3,000 ft above aerodrome elevation. On reaching 3,000 ft above aerodrome elevation, transition to normal en-route climb speed.

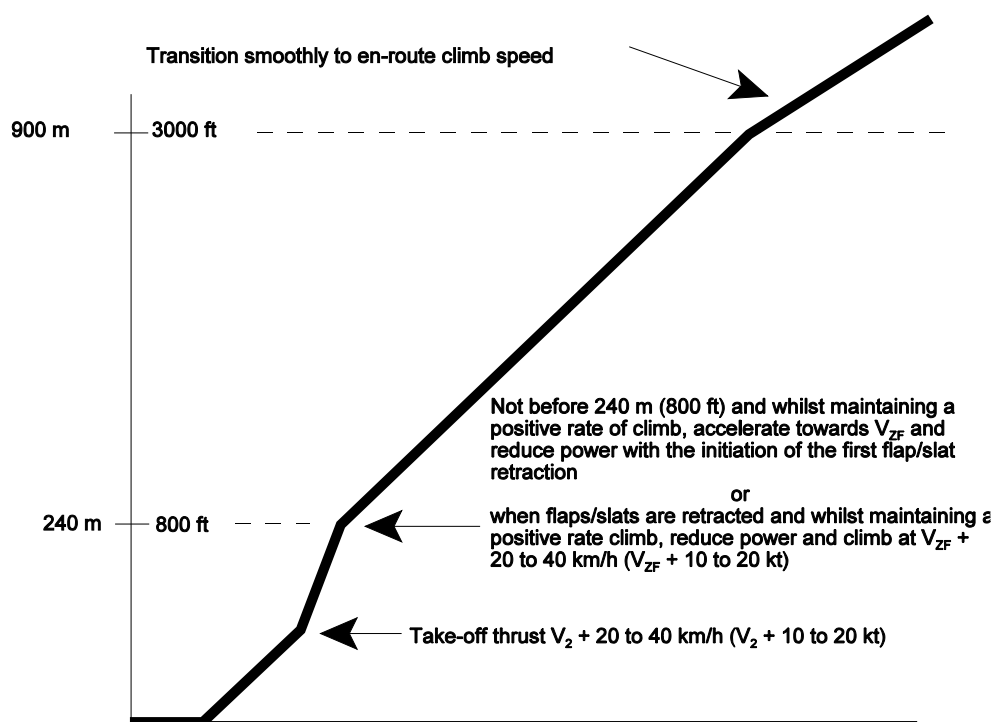


Figure 15.4 Noise Abatement Take-Off Climb - Example of a Procedure Alleviating Noise Distant from the Aerodrome (NADP 2)

QUESTIONS

1. The net flight path climb gradient after take-off compared to the gross climb gradient is:
 - a. larger.
 - b. equal.
 - c. depends on type of aircraft.
 - d. smaller.

 2. Given that the characteristics of a three engine turbojet aeroplane are as follows:
Thrust = 50,000 N per engine
 $g = 10 \text{ m/s}^2$
Drag = 72,569 N
Minimum gross gradient (2nd segment) = 2.7%
The maximum take-off mass under segment two conditions in the net take-off flight path conditions is:
 - a. 101,596 kg
 - b. 286,781 kg
 - c. 74,064 kg
 - d. 209,064 kg

 3. During the flight preparation the climb limited take-off mass (TOM) is found to be much greater than the field length limited TOM using 5° flap. In what way can the performance limited TOM be increased? There are no limiting obstacles.
 - a. By selecting a higher flap setting.
 - b. By selecting a higher V_2 .
 - c. By selecting a lower V_2 .
 - d. By selecting a lower flap setting.

 4. An operator shall ensure that the net take-off flight path clears all obstacles. The half-width of the obstacle-corridor at the distance D from the end of the TODA is at least:
 - a. $-90\text{m} + 1.125\text{D}$
 - b. $90\text{m} + \text{D}/0.125$
 - c. $90\text{m} + 0.125\text{D}$
 - d. 0.125D

 5. The 'climb gradient' is defined as the ratio of:
 - a. true airspeed to rate of climb.
 - b. rate of climb to true airspeed.
 - c. the increase of altitude to horizontal air distance expressed as a percentage.
 - d. the horizontal air distance over the increase of altitude expressed as a percentage.

 6. Which of the following statements, concerning the obstacle limited take-off mass for performance class A aeroplane, is correct?
 - a. It should not be corrected for 30° bank turns in the take-off path.
 - b. It should be calculated in such a way that there is a margin of 50 ft with respect to the "net take off flight path".
 - c. It cannot be lower than the corresponding climb limited takeoff mass.
 - d. It should be determined on the basis of a 35 ft obstacle clearance with the respect to the "net take-off flight path".
-

7. The determination of the maximum mass on brake release, of a certified turbojet aeroplane with 5°, 15° and 25° flaps angles on take-off, leads to the following values, with wind:

Flap angle:	5°	15°	25°
Runway limitation:	66 000	69 500	71 500
2nd segment slope limitation:	72 200	69 000	61 800

Wind correction: Head wind: + 120 kg per kt OR Tail wind: - 360 kg per kt

Given that the tail wind component is equal to 5 kt, the maximum mass on brake release and corresponding flap angle will be:

- a. 67 700 kg / 15 deg
 - b. 69 000 kg / 15 deg
 - c. 72 200 kg / 5 deg
 - d. 69 700 kg / 25 deg
8. The requirements with regard to take-off flight path and the climb segments are only specified for:
- a. the failure of two engines on a multi-engined aeroplane.
 - b. the failure of the critical engine on a multi-engines aeroplane.
 - c. the failure of any engine on a multi-engined aeroplane.
 - d. 2 engined aeroplane.
9. The first segment of the take-off flight path ends:
- a. at completion of gear retraction.
 - b. at completion of flap retraction.
 - c. at reaching V₂.
 - d. at 35 ft above the runway.
10. Which statement, in relation to the climb limited take-off mass of a jet aeroplane, is correct?
- a. 50% of a head wind is taken into account when determining the climb limited take-off mass.
 - b. On high elevation airports equipped with long runways the aeroplane will always be climb limited.
 - c. The climb limited take-off mass decreases with increasing OAT.
 - d. The climb limited take-off mass is determined at the speed for best rate of climb.
11. Which one of the following is not affected by a tail wind?
- a. the field limited take-off mass.
 - b. the obstacle limited take-off mass.
 - c. the take-off run.
 - d. the climb limited take-off mass.
12. How does TAS vary in a constant Mach climb in the troposphere?
- a. TAS increases.
 - b. TAS is constant.
 - c. TAS is not related to Mach Number.
 - d. TAS decreases.

13. For this question use Figure 4.5 in CAP 698 Section 4.
With regard to the take-off performance of a twin jet aeroplane, why does the take-off performance climb limit graph show a kink at 30°C, pressure altitude 0 ft?
- At lower temperatures one has to take the danger of icing into account.
 - The engines are pressure limited at lower temperatures, at higher temperatures they are temperature limited.
 - At higher temperatures the flat rated engines determines the climb limit mass.
 - At higher temperatures the VMBE determines the climb limit mass.
14. Which of the following sets of factors will increase the climb-limited take-off mass (TOM)?
- High flap setting, low PA, low OAT.
 - Low flap setting, high PA, high OAT.
 - Low flap setting, high PA, low OAT.
 - Low flap setting, low PA, low OAT.
15. For this question use Figure 4.5 in CAP698 Section 4.
Consider the take-off performance for the twin jet aeroplane climb limit chart. Why has the wind been omitted from the chart?
- There is a built-in safety measure.
 - The climb limit gradient requirements are taken relative to the air.
 - The effect of the wind must be taken from another chart.
 - There is no effect of the wind on the climb angle relative to the ground.
16. Which of the following statements is applicable to the acceleration height at the beginning of the 3rd climb segment?
- The minimum legally allowed acceleration height is at 1500 ft.
 - There is no minimum climb performance requirement when flying at the acceleration height.
 - The minimum one engine out acceleration height must be maintained in case of all engines operating.
 - The maximum acceleration height depends on the maximum time take-off thrust may be applied.
17. In relation to the net take-off flight path, the required 35 ft vertical distance to clear all obstacles is:
- based on pressure altitudes.
 - the height by which acceleration and flap retraction should be completed.
 - the height at which power is reduced to maximum climb thrust.
 - the minimum vertical distance between the lowest part of the aeroplane and all obstacles within the obstacle corridor.
18. Which of the following statements is correct?
- The performance limited take-off mass is independent of the wind component.
 - The accelerate stop distance required is independent of the runway condition.
 - The take-off distance with one engine out is independent of the wind component.
 - The climb limited take-off mass is independent of the wind component.

19. Which of the following statements with regard to the actual acceleration height at the beginning of the 3rd climb segment is correct?
- The minimum value according to regulations is 1000 ft.
 - There is no legal minimum value, because this will be determined from case to case during the calculation of the net flight path.
 - The minimum value according to regulations is 400 ft.
 - A lower height than 400 ft is allowed in special circumstances e.g. noise abatement.
20. For take-off obstacle clearance calculations, obstacles in the first segment may be avoided:
- by banking not more than 15° between 50 ft and 400 ft above the runway elevation.
 - by banking as much as needed if aeroplane is more than 50 ft above runway elevation.
 - only by using standard turns.
 - by standard turns – but only after passing 1,500 ft.
21. The second segment begins:
- when landing gear is fully retracted.
 - when flap retraction begins.
 - when flaps are selected up.
 - when acceleration starts from V_2 to the speed for flap retraction.
22. At which minimum height will the second climb segment end?
- 1,500 ft above field elevation.
 - 400 ft above field elevation.
 - 35 ft above ground.
 - When gear retraction is completed.
23. On a segment of the take-off flight path an obstacle requires a minimum gradient of climb of 2.6% in order to provide an adequate margin of safe clearance. At a mass of 110,000 kg the gradient of climb is 2.8%. For the same power and assuming that the angle of climb varies inversely with mass, at what maximum mass will the aeroplane be able to achieve the minimum gradient?
- 121,310 kg
 - 106,425 kg
 - 118,455 kg
 - 102,142 kg
24. During take-off, the third segment begins:
- when acceleration to flap retraction speed is started.
 - when landing gear is fully retracted.
 - when acceleration starts from V_{LOF} to V_2 .
 - when flap retraction is completed.
25. If there is a tail wind, the climb limited take-off mass will:
- increase.
 - decrease.
 - increase in the flaps extended case.
 - not be affected.

26. A higher pressure altitude at ISA temperature:
- has no influence on the allowed take-off mass.
 - decreases the field length limited take-off mass.
 - decreases the take-off distance.
 - increases the climb limited take-off mass.
27. The minimum climb gradient required on the 2nd flight path segment after the take-off of a jet aeroplane is defined by the following parameters:
- 1 Gear up
 - 2 Gear down
 - 3 Wing flaps retracted
 - 4 Wing flaps in take-off position
 - 5 All Engines at the take-off thrust
 - 6 One engine inoperative, remainder at the take-off thrust
 - 7 Speed equal to $V_2 + 10$ kt
 - 8 Speed equal to $1.3 V_S$
 - 9 Speed equal to V_2
 - 10 At a height of 35 ft above the runway
- The correct statements are:
- 2, 3, 6, 9
 - 1, 4, 5, 10
 - 1, 5, 8, 10
 - 1, 4, 6, 9
28. In the event that the take-off mass is obstacle limited and the take-off flight path includes a turn, the maximum bank angle is:
- 10 degrees up to a height of 400 ft.
 - 20 degrees up to a height of 400 ft.
 - 25 degrees up to a height of 400 ft.
 - 5 degrees up to height of 400 ft.
29. Up to which height in noise abatement departure procedure 1 (NADP1) must $V_2 + 10$ to 20 kt be maintained?
- 1,500ft.
 - 3,000ft.
 - 800ft.
 - 500ft.
30. Reference point zero refers to the:
- Point where the aircraft lifts off the ground.
 - Point where the aircraft reaches V_2 .
 - Point on the ground where the aircraft reaches 35ft.
 - Point where gear is selected up.
31. A Boeing 737 has a wingspan of 28.9 m. An obstacle is situated at a distance of 4,264 ft from the end of the TODA. What is the minimum horizontal obstacle clearance?
- 607.45 m
 - 252.50 m
 - 236.95 m
 - 240 m

ANSWERS

- | | | | | | | | |
|-----|---|-----|---|-----|---|-----|---|
| 1. | D | 11. | D | 21. | A | 31. | C |
| 2. | A | 12. | D | 22. | B | | |
| 3. | A | 13. | C | 23. | D | | |
| 4. | C | 14. | D | 24. | A | | |
| 5. | C | 15. | B | 25. | D | | |
| 6. | D | 16. | B | 26. | B | | |
| 7. | A | 17. | D | 27. | D | | |
| 8. | B | 18. | D | 28. | D | | |
| 9. | A | 19. | C | 29. | B | | |
| 10. | C | 20. | A | 30. | C | | |

CHAPTER SIXTEEN

CLASS A: EN ROUTE

Contents

EN-ROUTE PHASE	423
CLIMB PROFILE / CLIMB SCHEDULE	423
CRUISE SPEEDS	425
COST INDEX	426
CRUISE ALTITUDES	428
AERODYNAMIC CEILING AND MANOEUVRE CEILING	429
NORMAL DESCENT	430
EMERGENCY DESCENT	431
OBSTACLE CLEARANCE REQUIREMENTS	431
RANGE LIMIT FOLLOWING ENGINE FAILURE.	434
ETOPS	435
QUESTIONS	437
ANSWERS	444

EN-ROUTE PHASE

The en-route phase of flight starts at 1500 ft above the departure aerodrome and ends once the aeroplane has reached 1500 ft above intended destination aerodrome. Similarly with other phases of flight for Class A aeroplanes, the en-route regulations account for engine failure. Therefore, manufacturers and operators of Class A aeroplanes must ensure that the performance of the aeroplane subsequent to engine failure is still able to meet the regulations.

Firstly we will discuss the climb to the en-route altitude, then we will detail the en-route altitudes and how they are calculated as well as discussing various flight speeds. Lastly we will detail the descent, both normal descent, and the descent forced by either engine failure or depressurization.

CLIMB PROFILE / CLIMB SCHEDULE

After a normal take-off, climbing to the en-route altitude is a straight forward affair. Once the aeroplane configuration is clean, a set climb profile or climb schedule will be flown. Initially the aeroplane climbs at a constant indicated airspeed. However, continuously climbing at a constant indicated airspeed causes the Mach number to rise. Beyond a certain altitude, the Mach number gets too high and serious aerodynamic forces start to affect the aeroplane. In the 737 family the maximum Mach number, M_{MO} is 0.82. Therefore, at some lower altitude the aeroplane needs to change its climb profile to a constant Mach number climb. The altitude at which this change occurs is called the cross over or change-over altitude.

In brief summary then, the climb profile involves the aeroplane initially climbing at a constant indicated airspeed, and then at the cross over altitude, the aeroplane then climbs at a constant mach number. However, ICAO limits the maximum indicated airspeed to 250 knots below 10,000 ft. For the majority of the 737 family, the climb profile is 250 knots indicated airspeed up to 10,000 ft, then the aeroplane is accelerated to 280 knots and the climb continued at 280 knots. As the aeroplane climbs, Mach number will increase and when the Mach number reaches 0.74, the aeroplane maintains a climb speed of 0.74 until the en-route cruise altitude. Using Figure 16.1 you will notice that the cross over altitude is at about 25,700 ft.

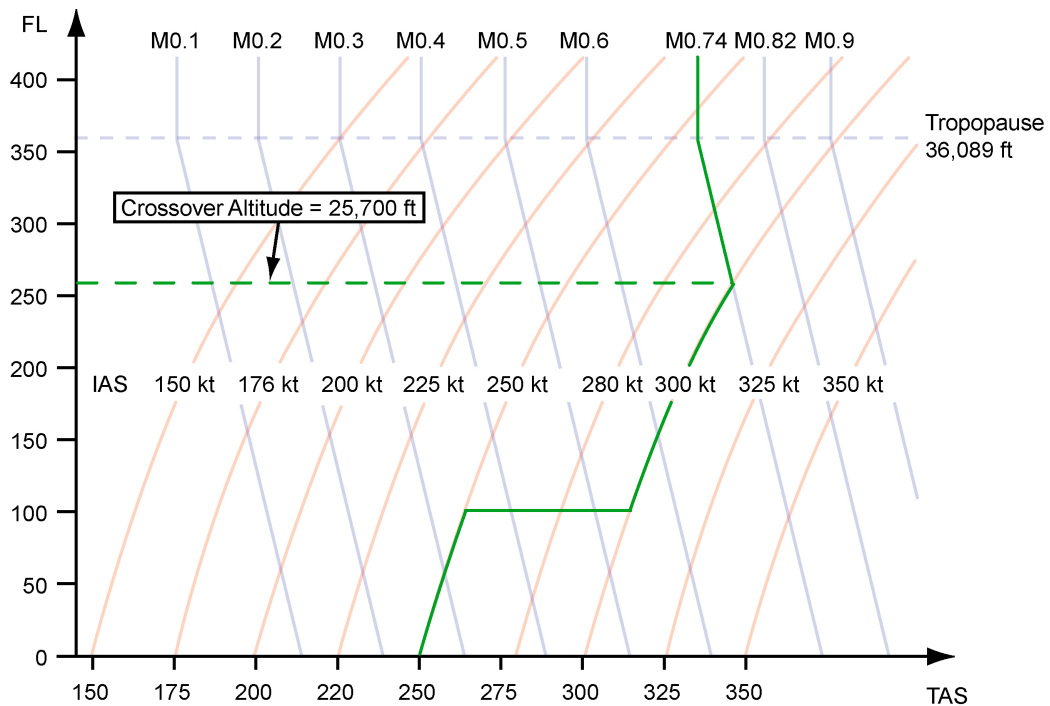


Figure 16.1 A typical climb schedule for a 737 – 400.

However, you need to understand what happens to the crossover altitude, if a faster indicated airspeed climb is maintained, and for this example we'll increase the second part of the indicated airspeed climb from 280 to 325 knots. Looking at Figure 16.2, initially the aeroplane will still climb at 250 knots, but, once reaching 10,000 ft the aeroplane will be accelerated to 325 knots and then climb at 325 knots. Once the Mach number has increased to 0.74, then the aeroplane climbs at 0.74. Notice now the crossover altitude is lower at 18,000 ft. Therefore if the indicated airspeed is increased in the climb profile, the crossover altitude decreases to a lower altitude.

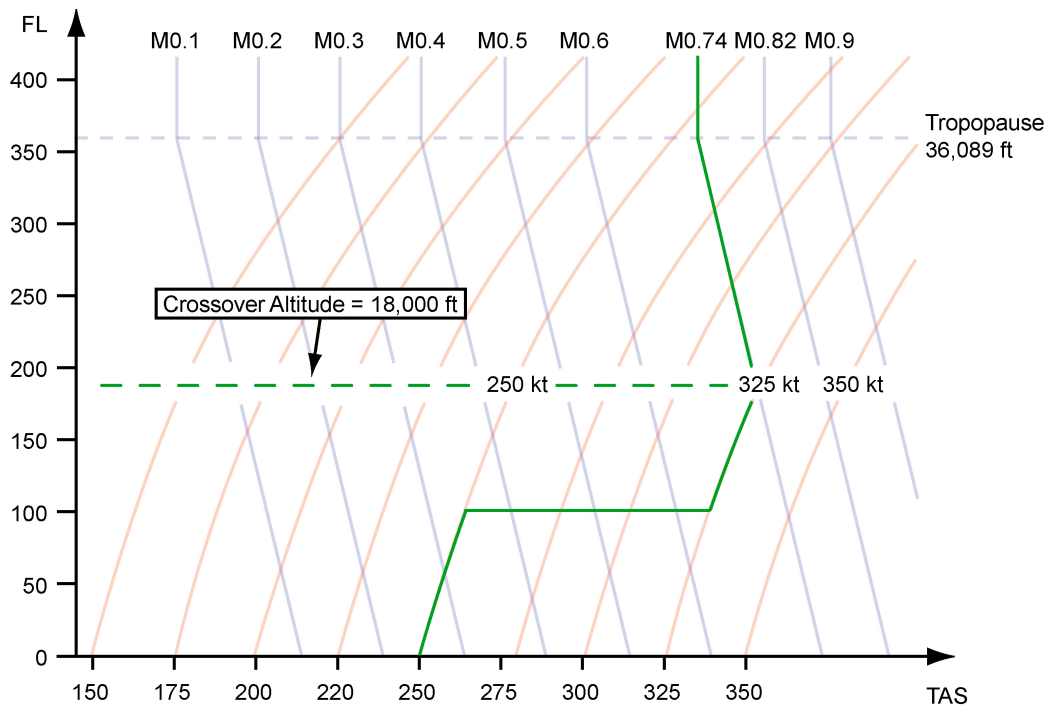


Figure 16.2 A typical climb schedule using a faster indicated airspeed.

CRUISE SPEEDS

Before we proceed to discuss the en-route altitude, it is important at this point to briefly detail a few important speeds, most of which you have already covered. These speeds are commonly expressed as Mach numbers. The first of these speeds is the maximum operating speed, either called V_{MO} when using indicated airspeed or M_{MO} when using mach numbers. For the majority of the 737 family V_{MO} is 340 knots and M_{MO} is 0.82. Flying beyond these speeds in a commercial operational context is not permitted and may cause either structural damage or a high speed stall.

The next two speeds are used in reference to describing the range of the aeroplane and were mentioned in the en-route chapter of the general performance principles section. These two speeds are the maximum range cruise speed, MRC, and long range cruise speed, LRC. When these speeds are referenced in terms of a mach number the abbreviation is changed to MMR and MLRC respectively.

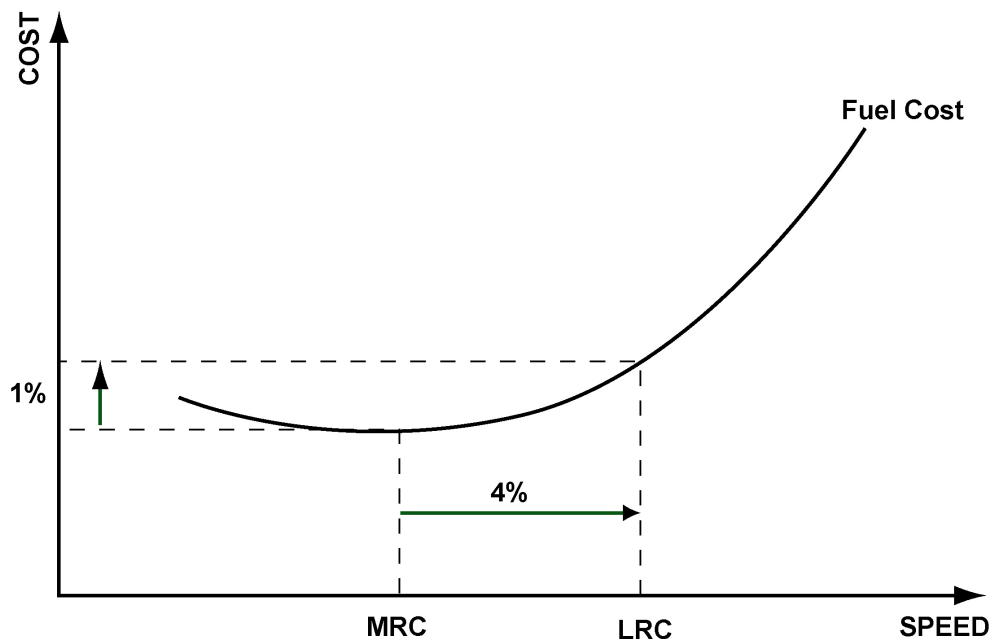


Figure 16.3 A graph showing the relation between the long range cruise speed (LRC) and the maximum range cruise speed (MRC)

As you can see from Figure 16.3, plotting cost and speed, the advantage of flying at the maximum range speed is simply that the aeroplane will use the least amount of fuel and therefore have the least fuel cost for a given distance. However, operationally, the faster “long range cruise” is used. The simple reason why this speed is used is because by getting to destination more quickly; more revenue earning flights can be carried out in any give period. In other words over a given time period, 4% more flights can be carried out with only a fuel consumption increase of 1%. The long range cruise speed does suffer from limitations. It doesn’t take into account the variable cost of fuel from day to day or month to month and neither does it account for the operational costs. When fuel prices are high, the extra fuel consumption may dramatically increase the overall cost of the flight and a more operationally economical speed may need to be flown. The relationship of these costs is explained by the use of a cost index and the speed flown based upon the cost index this is called “ECON”. This will be discussed next.

COST INDEX

The fundamental rationale of the cost index concept is to achieve minimum operation trip cost by means of a trade-off between time related costs and fuel related costs. The cost index is used to take into account the relationship between fuel-and time-related costs. With time-related costs, the faster the aircraft is flown, the more money is saved in time costs. This is because the faster the aircraft is flown, the more miles can be flown for time-related components. It also means that more miles can be flown between inspections when considering maintenance costs. These costs are minimum at the maximum operating speed V_{MO}/M_{MO} . However, if the aircraft is flown at such a high speed the fuel burn increases and total fuel cost for the trip increases. Fuel costs on the other hand will be minimum at the maximum range cruise speed (M_{RC}) and maximum at the maximum operating speed. Adding the time related costs and fuel related costs together, produces a direct operating cost, or more simplistically, a total operating cost. The flight management system uses the time and fuel related costs help select the best speed to fly.

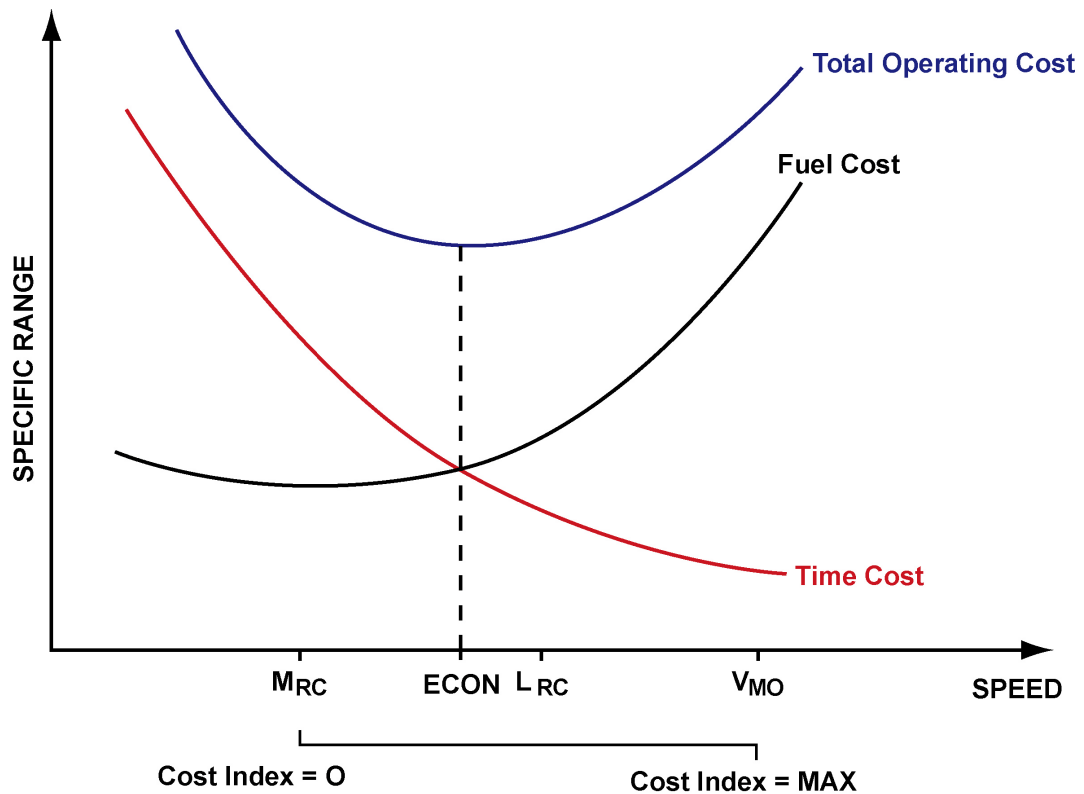


Figure 16.4 A graph plotting the cost of the aeroplane against the aeroplane speed

Looking at Figure 16.4 you can see from the total cost curve that the speed which gives the minimum total operating cost is the most economical speed to fly. This speed is called ECON, in other words the minimum cost speed. The value of the ECON speed is worked out by the flight management system based upon the value of the cost index. As a formula the cost index is a ratio of cost of time, CT, divided by the cost of fuel, CF.

$$\text{COST INDEX (CI)} = \frac{\text{COST OF TIME (CT)}}{\text{COST OF FUEL (CF)}}$$

When fuel costs are high and time cost are very low, the cost index would be almost zero and the blue total cost line is moved to the left. The intersection point of the other cost lines will lie very close to the maximum range cruise speed and. With a cost index of zero, the ECON speed (found at the bottom of the blue line) would now be at the maximum range speed. When time costs are high and fuel costs are low, the cost index would be very high and the blue total cost line moves to the far right of the graph. The ECON speed, found at the bottom of the blue curve would now be very close to the maximum operating speed.

To summarise then, increasing the cost index from zero to maximum will increase the ECON speed from the maximum range speed to maximum operating speed. For most aeroplanes the cost index varies from zero to 99 or from zero to 999.

CRUISE ALTITUDES

Once the aeroplane has completed the climb profile and has reached the top of the climb, the aeroplane will level off at the appropriate altitude. This cruise altitude should ideally coincide with optimum altitude. You may recall that the optimum altitude was the altitude for maximum specific range or maximum fuel mileage. As a general rule, this altitude is not constant. As weight decreases during the flight from fuel consumption, the optimum altitude increases, as illustrated in the Figure 16.5.

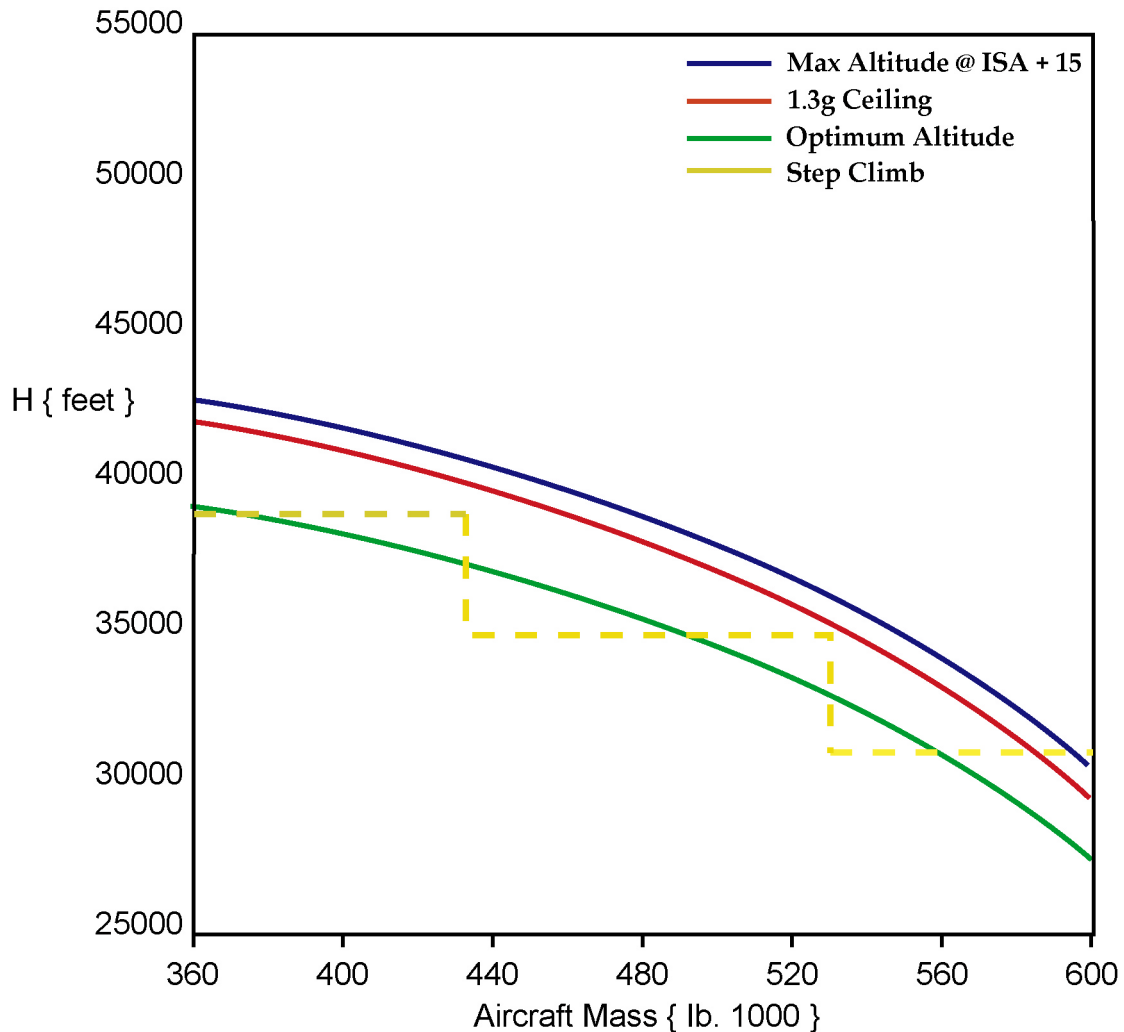


Figure 16.5 A graph showing important altitudes for a typical medium range jet

Therefore, to constantly fly at the optimum altitude, the aeroplane will not actually fly level, but will in fact slowly be climbing in the cruise. On the other hand, ATC restrictions require level flight cruise to ensure vertical separations with other aeroplanes. To try and accommodate ATC in congested airspace aircraft must fly by segments of constant altitude which must be as close as possible to the optimum altitude. The level segments are established within 2,000 feet from the optimum altitude. The procedure is called the step climb which you have seen in general principles chapter on En-route. Remaining within 2000 ft of the optimum altitude ensures the range is 99% of the maximum specific range. There may be several step climbs during the flight and the aeroplane will be gaining altitude throughout this process. However, there is a limit to how high the aeroplane is permitted to operate and able to operate.

As the aeroplane altitude increases, the thrust that is required to maintain a given speed, increases. Eventually, there will be an altitude where the thrust is increased to its maximum cruise value and it would not be possible to climb any higher without exceeding the thrust limits. This altitude is called the Maximum Altitude and is shown in Figure 16.5. However, the hotter the atmosphere, the lower this altitude becomes and in exceptionally hot atmospheres the maximum altitude is almost the same as the optimum altitude. Although the aeroplane cannot operate above the maximum altitude, there are other altitude limits placed upon the aeroplane.

AERODYNAMIC CEILING AND MANOEUVRE CEILING

Before we can discuss the other limits on the operating altitude of an aeroplane it is important to discuss aeroplane stalling. When the speed of the aeroplane is reduced, in order to still produce enough lift to balance weight, the angle of attack must increase. However, below a certain speed, the angle of attack on the wings is such that the flow of air over the wing starts to separate from the boundary layer producing turbulent air flow. The separation point fluctuates back and forth along the wing making strong eddies in the turbulent airflow. These strong eddies, buffet the elevators or tail plane. This phenomenon is called the low speed buffet. Flying below this speed will dramatically decrease the lift and a full stall ensues.

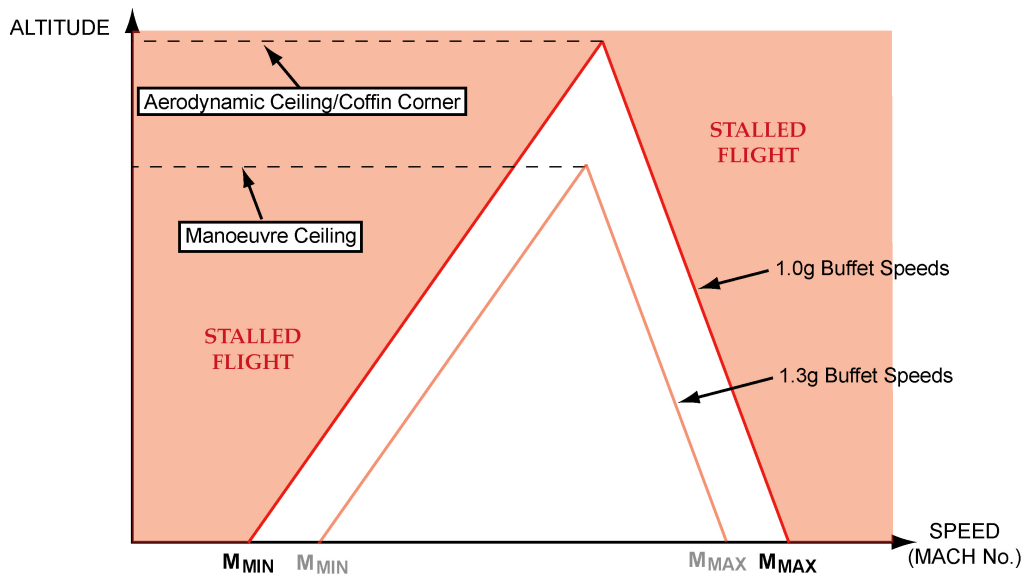


Figure 16.6 The relationship of the mach number for the low speed and high speed buffets with altitude

For a given weight and configuration, the aeroplane will always stall at the same indicated airspeed but the equivalent mach number for the low speed buffet and stall increases with altitude as illustrated by a simplistic graph shown in Figure 16.6. The Mach number for the low speed buffet is abbreviated to M_{MIN} . A similar buffet can occur at high speed. At very high speeds, close to the speed of sound, the compressibility of the air ahead of the aeroplane leads to the formation of shock waves or high pressure waves. These shock waves create a disturbance to the flow of air over the wing causing it to separate and create turbulent eddies. Similarly to the low speed buffet these eddies will buffet the elevator. This phenomenon is called the high speed buffet and the Mach number for the high speed buffet decreases with altitude. Flying faster than this speed may cause a high speed shock stall in an aeroplane whose wings are not designed to overcome such effects. The Mach number for the high speed buffet decreases with

altitude, as shown. This speed is commonly abbreviated to M_{MAX} and is shown by the backward sloping red line to the right of the graph in Figure 16.6.

Taking into consideration both the Mach number for low speed and high speed buffet, it means that there are two mach numbers, below and above which the aeroplane is unable to fly. This speed range between the Mach number for the low speed stall and high speed stall is called the buffet margin. The buffet margin is the speed range between the low and speed and high speed buffet. The important point to understand is that the margin between the low speed and high speed buffet decreases with altitude. Notice that there is an altitude with that the low speed and high speed buffets are coincident at the same velocity. It is impossible to fly higher than this altitude. Flying slower or faster than the speed shown will stall the aeroplane. In fact, even manoeuvring the aeroplane will initiate a stall because manoeuvring the aeroplane will increase the effective weight and increase the stall speed. This altitude is called the aerodynamic ceiling, or coffin corner. To prevent aeroplanes from operating too close to this altitude, an operational limit is set below this point. Aerodynamic ceiling is the altitude where the low speed and high speed buffets are coincident. Notice that a 1.3 g manoeuvre moves the buffet speed lines to the faded red position in Figure 16.6. Notice that now, the Mach number for the low and speed and high speed buffet are coincident at a lower altitude. This altitude is called the 1.3 g buffet limit altitude or manoeuvre ceiling and is usually about 4,000 to 6,000 ft below the aerodynamic ceiling.

NORMAL DESCENT

When the aeroplane gets close to the destination airfield it will reach a point which marks the beginning of the descent. This is called the top of descent. You may remember that in order to initiate a descent, firstly the thrust must be reduced, and then the nose is lowered to get weight to act forwards to balance the drag. The balance of forces ensures a constant speed can be maintained during the descent. The descent profile is almost the reverse of the climb profile. The climb for a typical 737 is initially flown at 250 knots, then at 10,000 ft this changes to 280 knots and then at the cross over altitude mach 0.74 is maintained. The descent is flown initially and 0.74 mach, then at the cross over altitude the speed in kept constant at 280 knots, but when 10,000ft is reached no more than 250 knots must be flown.

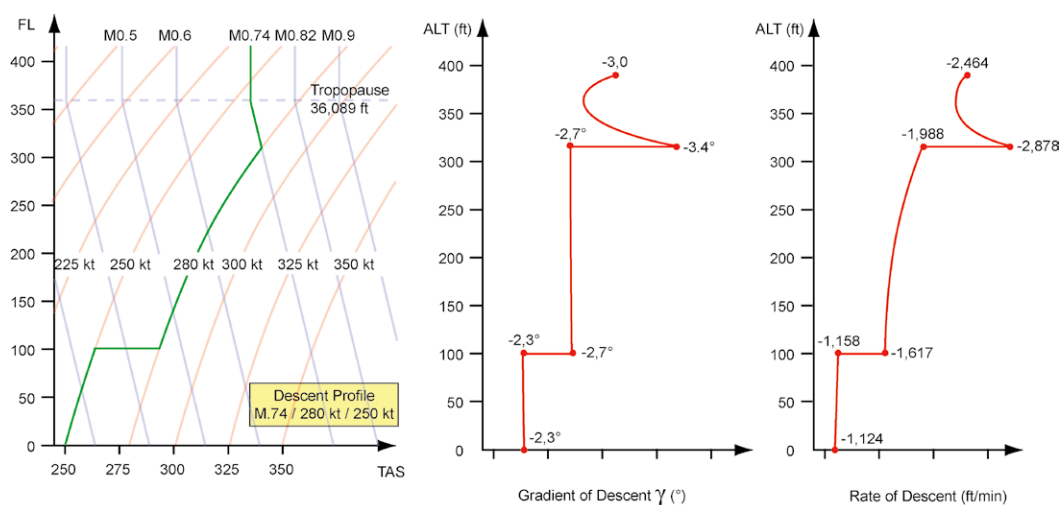


Figure 16.7 A typical descent profile for a medium range jet

Shown in Figure 16.7 are the characteristics of the descent so you can see what happens to the gradient and rate of descent throughout the descent profile. If at any point air traffic control asks the pilots to expedite the descent, then the only action by the pilots would be to deploy the speed brakes.

This increases the drag, which must be balanced by more weight apparent thrust, therefore the nose is lowered which increases both the angle and rate of descent as per the instruction of air traffic control.

EMERGENCY DESCENT

The next descent to consider is the descent characteristic following either depressurisation or engine failure. In flight, engine or pressurization failures force a premature descent and therefore the performance becomes very constraining over mountainous areas. In case of an engine failure during flight, the remaining thrust is no longer sufficient to balance the drag force and therefore the cruise speed cannot be maintained. The only solution is to descend to a lower flight altitude, where the remaining engine can provide enough thrust to balance the drag and allow level flight once more. To achieve this, the aeroplane is allowed to decelerate from the selected cruise speed to the velocity of minimum drag, and then the nose is lowered to get weight apparent thrust to balance drag. As the aeroplane descends into the lower atmosphere where density is greater, the remaining engine can develop more thrust which will mean that weight apparent thrust can be slowly reduced until an altitude is reached where the remaining engine generates enough thrust to balance drag. At this altitude the aeroplane can level off.

This procedure is called the drift down, and it produces a Driftdown profile. This path must of course, be above all relevant obstacles, but this will be discussed later.

With a pressurization failure the procedure is little different. At high altitude, following depressurization, the air in the cabin escapes and very quickly the cabin air becomes the air same as outside. At high altitude the problem is that there is very little oxygen to breathe. Therefore oxygen must be carried on board and supplied to crew and passengers through oxygen masks. However, the amount of oxygen carried is limited, therefore the aeroplane must descend, as rapidly as possible to 10,000 ft where there is sufficient oxygen, before the oxygen supply runs out. The procedure involves configuring the aeroplane for the maximum rate of descent. You may recall that in order to achieve a maximum rate of descent, excess power required has to be as large as possible. Therefore drag must be high and speed must be high. As a result, the first actions of the pilot are to don the oxygen masks, initiate descent, close the throttles apply the speed brakes and then allow the aeroplane to accelerate to maximum operating speed which is either V_{MO} or M_{MO} . This configuration is then maintained till at least 10,000 ft, or minimum safe en-route altitude, where there is sufficient oxygen to breathe.

OBSTACLE CLEARANCE REQUIREMENTS

One of crucial points about the driftdown procedure is the clearance of obstacles. Because the aeroplane is forced to descend, terrain, like mountains may present a flight hazard. When assessing the terrain hazard a safety margin must be introduced. When planning routes and planning the flight profile, it is not the gross flight profile that must be assumed, but rather the net flight profile. In other words, the flight profile must be made worse by a safety factor. This safety factor is based on assuming a gradient of descent that is worse than the aeroplane can actually achieve. For two engine aeroplanes with one engine inoperative the gross gradient of descent is increased by 1.1%. This increases to 1.4% for 3 engine aeroplanes and 1.6% for four engine aeroplanes.

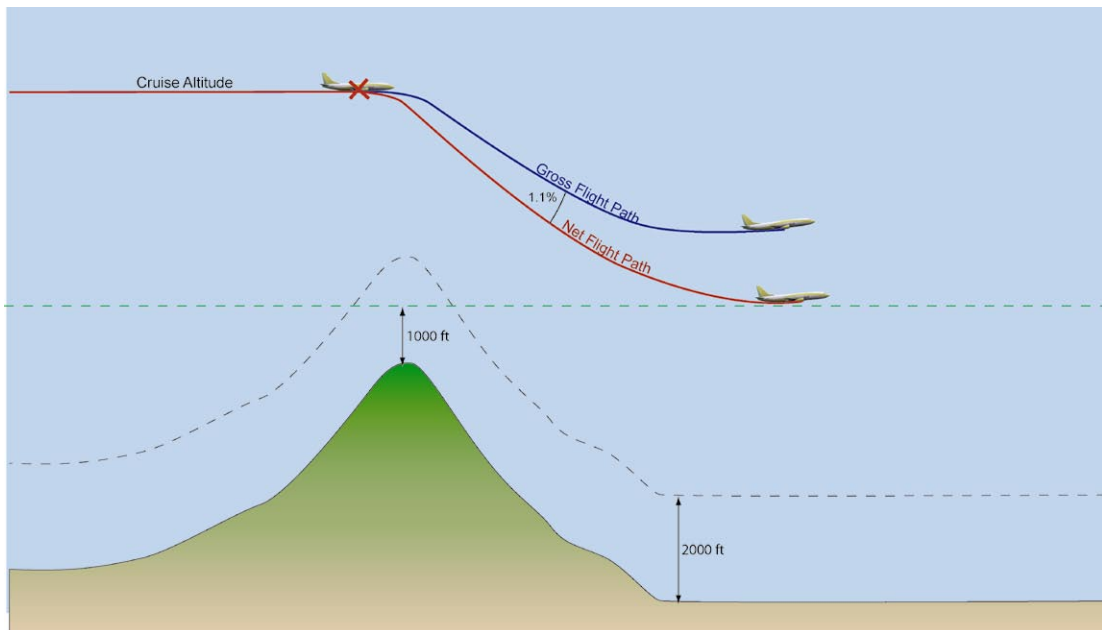


Figure 16.8 Net and Gross Descent Profiles for a typical twin engine medium range jet

JAR – OPS 1 details the regulations for en-route obstacle clearance. It states that the gradient of the net flight path must be positive at at least 1000 ft above all terrain and obstructions along the route within 5 nm on either side of the intended track. From Figure 16.8 you can see that in the example the net flight path does indeed become positive 1000 ft above the obstacle. This regulation is essentially saying that the aeroplane must be able to demonstrate it can level off and achieve a positive climb at 1000 ft above all obstacles along the route. This may be very difficult to achieve if there was a very high mountain around.

If the aeroplane is unable to have a positive climb 1000 ft above all obstacles, then the aeroplane may level off at a lower altitude so long as any obstacle encountered in the descent is cleared vertically by at least 2000 ft. Using Figure 16.8, if the net flight path cannot be positive 1000 ft above the obstacle then the aeroplane may descend lower, BUT, the flight path must not enter the 2000 ft zone above the terrain.

In order to find out if the aeroplane is able to level off at 1000ft above an obstacle, then use the graph in CAP 698 on page 40 of section 4. This has been reproduced in Figure 16.9.

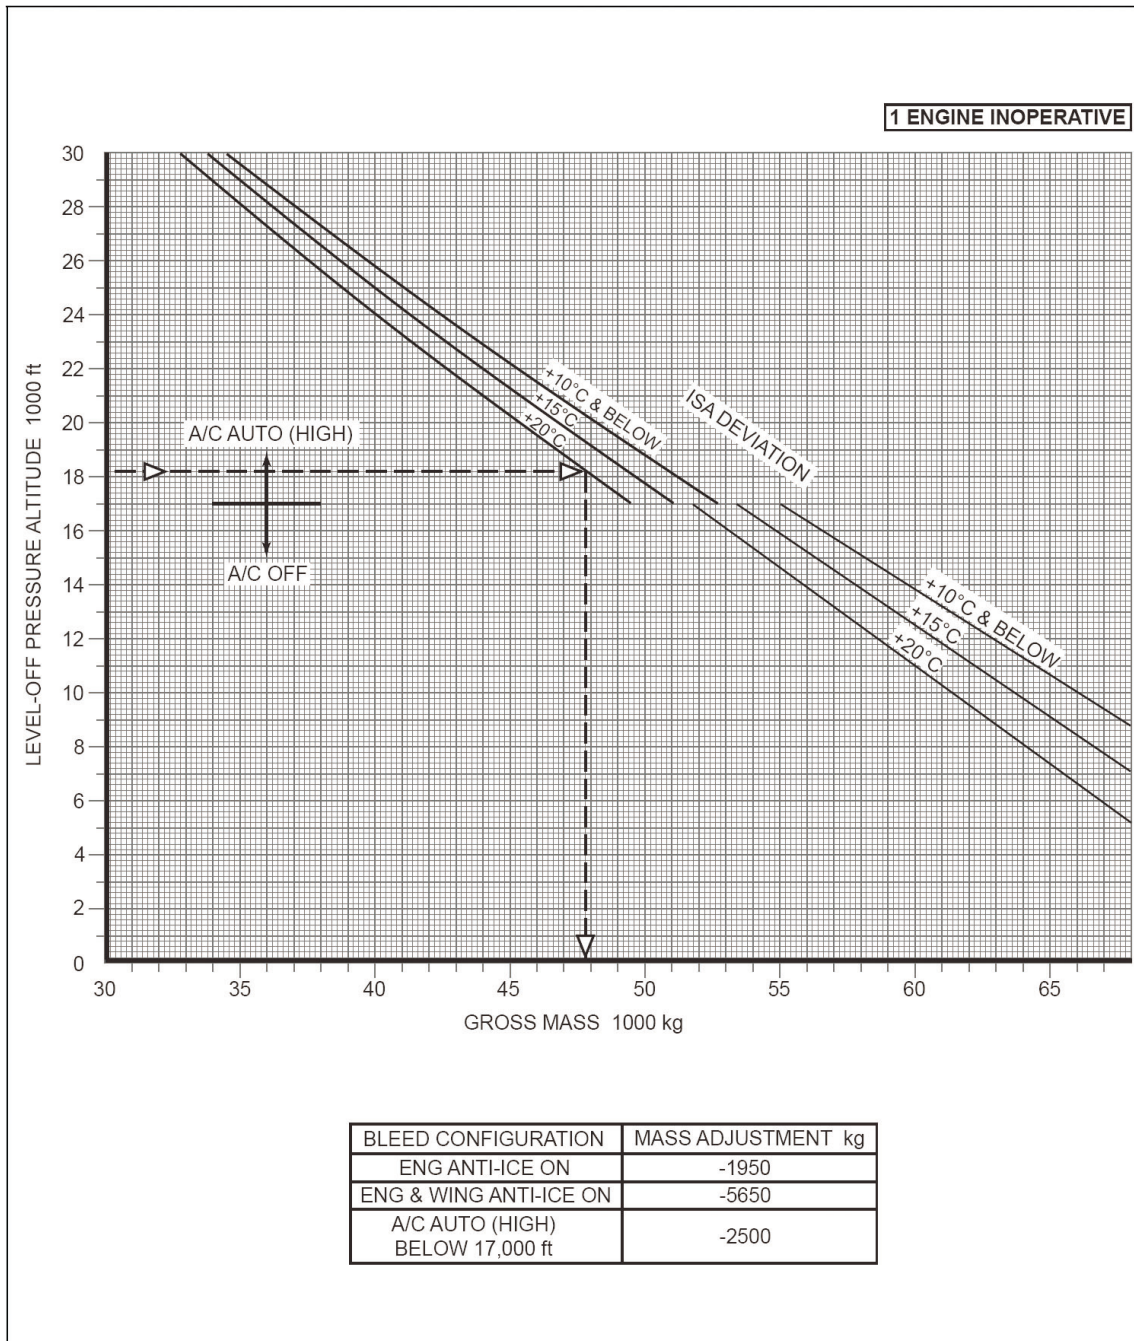


Figure 16.9 A graph to calculate the maximum mass for a given net level off altitude

Simply enter the graph with level off altitude that is required (obstacle height AMSL + 1000 ft) and the graph will show the mass that the aeroplane will need to be at in order to level off at that altitude. In the example on the graph, in order to level off at 18,000 ft in an ISA + 20 atmosphere the aeroplane would need to have a mass of just less than 48,000 kg. If this is not possible, then other graphs, shown on page 41 to 44 of CAP698 must be used.

These graphs are more complicated, but importantly, these graphs will enable the pilot to work out if the aeroplane can clear any obstacle in the flight path by 2000 ft. When you use the graph be careful to adjust the weight of the aeroplane for any non standard conditions and anti ice use. Notice that the heavier the aeroplane the longer and lower the driftdown procedure is.

The last of the regulations state that the aeroplane must have a positive gradient at 1,500 ft above the aerodrome where the landing is assumed to be made after engine failure.

RANGE LIMIT FOLLOWING ENGINE FAILURE

After engine failure, the lower operating altitude significantly decreases the engines efficiency. So much so that the fuel-flow on the remaining engine is almost as much as the fuel flow with both engines operating at high altitude. This fact, together with the reduced true airspeed, means that the specific range is dramatically decreased. As a result of the reduced range it is now not possible to reach the destination airfield and in fact the priority now is to find an alternate airfield to land before the fuel runs out. This issue is of such importance that it was necessary to regulate it. The authorities have to set a safety standard that in the event of engine failure the aeroplane must have the capability of reaching a suitable airfield within a certain time period.

JAR-OPS 1 states that twin engine aeroplanes beyond a certain size must be no further away from a suitable aerodrome than the distance flown in 60 minutes using the one engine operative cruise speed as TAS in still air. For aeroplanes with 3 or more engines the time is increased to 90 minutes. Therefore at all points on the route, a twin engine aeroplane must be within 60 minutes of an alternate airfield.

This regulation has a significant impact on flight routes, especially over the sea. In the example in Figure 16.10 you can see that to comply with the 60 minute the rule the aeroplane track must all times be within the 60 minute range limit of a suitable alternate airfield. From the diagram in Figure 16.10, a direct track to North America from Europe is not possible.

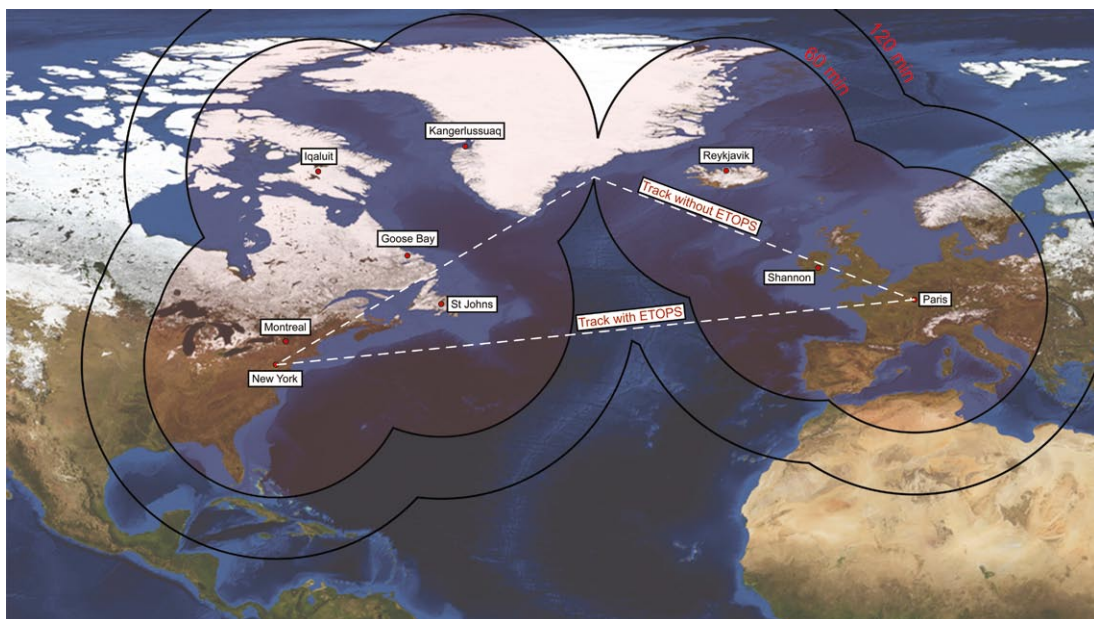


Figure 16.10 Range Limits on twin engine medium range jets.

However, as more and more reliable and efficient aeroplanes are produced, an extension to the 60 minute rule has been introduced.

ETOPS

The extension to the 60 minute rule is called “ETOPS” and it stands for **E**xtended range with **T**win engine aircraft **O**peration**S**. It hugely increases the operational capability of twin engine aeroplanes where only 3 or more engine aeroplanes could operate. However, ETOPS must be applied for by the airlines concerned and approval gained from the appropriate aviation authority.

To gain ETOPS approval, a greater range of performance parameters must be known and these accompany the application and are eventually published in the operating manual. These include extra data for

- Area of operation
- Critical Fuel Reserves
- Net Level-off Altitudes

Gaining an ETOPS approval of 120 minutes for example will greatly benefit flight tracks across the Atlantic Ocean, as shown in Figure 16.10. The route from Paris to New York for example, can now be flown direct by a twin jet aeroplane. Currently, the longest ETOPS approval is given to the Boeing 777. It holds an approval of 180 minutes with contingencies for 207 minutes over the Pacific.

In the future ETOPS may be evolving into a newer system, called LROPS. LROPS stands for Long Range Operational Performance Standards, which will affect all aircraft, not just those with a twin-engine configuration.

QUESTIONS

1. Which statement with respect to the step climb is correct?
 - a. A step climb provides better economy than a cruise climb.
 - b. Performing a step climb based on economy can be limited by the 1.3g altitude.
 - c. In principle a step climb is performed immediately after the aircraft has exceeded the optimum altitude.
 - d. A step climb may not be performed unless it is indicated in the filed flight plan.

2. Which statement with respect to the step climb is correct?
 - a. A step climb is executed because ATC desires a higher altitude.
 - b. A step climb is executed in principle when, just after levelling off, the 1.3g altitude is reached.
 - c. Executing a desired step climb at high altitude can be limited by buffet onset at g-loads larger than 1.
 - d. A step climb must be executed immediately after the aeroplane has exceeded the optimum altitude.

3. The lift coefficient decreases during a glide at a constant Mach number, mainly because the:
 - a. TAS decreases.
 - b. glide angle increases.
 - c. IAS increases.
 - d. aircraft mass decreases.

4. An aeroplane carries out a descent from FL 410 to FL 270 at cruise Mach number, and from FL 270 to FL 100 at the IAS reached at FL 270. How does the angle of descent change in the first and in the second part of the descent? Assume idle thrust and clean configuration and ignore compressibility effects.
 - a. Increases in the first part; is constant in the second.
 - b. Increases in the first part; decreases in the second.
 - c. Is constant in the first part; decreases in the second.
 - d. Decreases in the first part; increases in the second.

5. During a glide at constant Mach number, the pitch angle of the aeroplane will:
 - a. decrease.
 - b. increase.
 - c. increase at first and decrease later on.
 - d. remain constant.

6. If a flight is performed with a higher "Cost Index" at a given mass which of the following will occur?
 - a. A better long range.
 - b. A higher cruise mach number.
 - c. A lower cruise mach number.
 - d. A better maximum range.

7. During a descent at constant Mach Number, the margin to low speed buffet will:
- decrease, because the lift coefficient decreases.
 - increase, because the lift coefficient decreases.
 - remain constant, because the Mach number remains constant.
 - increase, because the lift coefficient increases.
8. A jet aeroplane is climbing with constant IAS. Which operational speed limit is most likely to be reached?
- The Stalling speed.
 - The Minimum control speed air.
 - The Mach limit for the Mach trim system.
 - The Maximum operating Mach number.
9. ETOPS flight is a twin engine jet aeroplane flight conducted over a route, where no suitable airport is within an area of:
- 75 minutes flying time at the approved one engine out cruise speed.
 - 60 minutes flying time in still air at the approved one engine out cruise speed.
 - 60 minutes flying time in still air at the normal cruising speed.
 - 30 minutes flying time at the normal cruising speed.
10. The danger associated with low speed and/or high speed buffet:
- limits the manoeuvring load factor at high altitudes.
 - can be reduced by increasing the load factor.
 - exists only above MMO.
 - has to be considered at take-off and landing.
11. Which data can be extracted from the Buffet Onset Boundary Chart?
- The value of the Mach number at which low speed and shock stall occur at various weights and altitudes.
 - The values of the Mach number at which low speed buffet and Mach buffet occur at various masses and altitudes.
 - The value of maximum operating Mach number (MMO) at various masses and power settings.
 - The value of the critical Mach number at various masses and altitudes.
12. Which of the following factors determines the maximum flight altitude in the "Buffet Onset Boundary" graph?
- Aerodynamics.
 - Theoretical ceiling.
 - Service ceiling.
 - Economy.
13. The optimum cruise altitude increases:
- if the aeroplane mass is decreased.
 - if the temperature (OAT) is increased.
 - if the tailwind component is decreased.
 - if the aeroplane mass is increased.

14. Which of the following statements with regard to the optimum cruise altitude (best fuel mileage or range) is correct?
- An aeroplane usually flies above the optimum cruise altitude, as this provides the largest specific range.
 - An aeroplane sometimes flies above or below the optimum cruise altitude, because ATC normally does not allow aeroplanes to fly continuously at the optimum cruise altitude.
 - An aeroplane always flies below the optimum cruise altitude, as otherwise Mach buffet can occur.
 - An aeroplane always flies on the optimum cruise altitude, because this is most attractive from an economy point of view.
15. The optimum altitude:
- is the altitude up to which cabin pressure of 8 000 ft can be maintained.
 - increases as mass decreases and is the altitude at which the specific range reaches its maximum.
 - decreases as mass decreases.
 - is the altitude at which the specific range reaches its minimum.
16. Under which condition should you fly considerably lower (4,000 ft or more) than the optimum altitude?
- If, at the lower altitude, either more headwind or less tailwind can be expected.
 - If, at the lower altitude, either considerably less headwind or considerably more tailwind can be expected.
 - If the maximum altitude is below the optimum altitude.
 - If the temperature is lower at the low altitude (high altitude inversion).
17. What happens to the specific range with one or two engines inoperative?
- At first improved and later reduced.
 - It decreases.
 - It increases.
 - Unaffected by engine failure.
18. The optimum cruise altitude is:
- the pressure altitude up to which a cabin altitude of 8000 ft can be maintained.
 - the pressure altitude at which the speed for high speed buffet as TAS is a maximum.
 - the pressure altitude at which the highest specific range can be achieved.
 - the pressure altitude at which the fuel flow is a maximum.
19. The maximum operating altitude for a certain aeroplane with a pressurized cabin:
- is dependent on aerodynamic ceiling.
 - is dependent on the OAT.
 - is only certified for four-engine aeroplanes.
 - is the highest pressure altitude certified for normal operation.

20. Why are 'step climbs' used on long distance flights?
- Step climbs do not have any special purpose for jet aeroplanes; they are used for piston engine aeroplanes only.
 - To respect ATC flight level constraints.
 - To fly as close as possible to the optimum altitude as aeroplane mass reduces.
 - Step climbs are only justified if, at the higher altitude, less headwind or more tailwind can be expected.
21. Long range cruise (LRC) instead of best range speed (MRC) is selected because LRC:
- is 4% faster and achieves 99% of maximum specific range in zero wind.
 - is the speed for best range.
 - is the speed for best economy.
 - gives higher specific range with tailwind.
22. What happens when an aeroplane climbs at a constant Mach number?
- IAS stays constant so there will be no problems.
 - The "1.3G" altitude is exceeded, so Mach buffet will start immediately.
 - The lift coefficient increases.
 - The TAS continues to increase, which may lead to structural problems.
23. The speed range between low speed buffet and high speed buffet:
- decreases with increasing mass and is independent of altitude.
 - is only limiting at low altitudes.
 - increases with increasing mass.
 - narrows with increasing mass and increasing altitude.
24. A jet aeroplane descends with constant Mach number. Which of the following speed limits is most likely to be exceeded first?
- Maximum Operational Mach Number
 - Maximum Operating Speed
 - Never Exceed Speed
 - High Speed Buffet Limit
25. With respect to the optimum altitude, which of the following statements is correct?
- An aeroplane always flies below the optimum altitude, because Mach buffet might occur.
 - An aeroplane always flies at the optimum altitude because this is economically seen as the most attractive altitude.
 - An aeroplane flies most of the time above the optimum altitude because this yields the most economic result.
 - An aeroplane sometimes flies above or below the optimum altitude because optimum altitude increases continuously during flight.

26. The aerodynamic ceiling:
- is the altitude at which the aeroplane reaches 50 ft/min.
 - is the altitude at which the speeds for low speed buffet and for high speed buffet are the same.
 - depends upon thrust setting and increase with increasing thrust.
 - is the altitude at which the best rate of climb theoretically is zero.
27. An aeroplane operating under the 180 minutes ETOPS rule may be up to:
- 180 minutes flying time to a suitable airport in still air with one engine inoperative.
 - 180 minutes flying time to a suitable airport under the prevailing weather condition with one engine inoperative.
 - 180 minutes flying time from suitable airport in still air at a normal cruising speed.
 - 90 minutes flying time from the first en-route airport and another 90 minutes from the second en-route airport in still air with one engine inoperative.
28. If the climb speed schedule is changed from 280/.74 to 290/.74 the new crossover altitude is:
- unchanged.
 - only affected by the aeroplane gross mass.
 - lower.
 - higher.
29. The drift down procedure specifies requirements concerning the:
- engine power at the altitude at which engine failure occurs.
 - climb gradient during the descent to the net level-off altitude.
 - weight during landing at the alternate.
 - obstacle clearance during descent to the net level-off altitude.
30. For this question use Figure 4.24 in CAP 698 Section 4.
With regard to the drift down performance of the twin jet aeroplane, why does the curve representing 35,000 kg gross mass in the chart for drift down net profiles start at approximately 3 minutes at FL370?
- Because at this mass the engines slow down at a slower rate after failure, there is still some thrust left during four minutes.
 - Due to higher TAS at this mass it takes more time to develop the optimal rate of descent, because of the inertia involved.
 - All the curves start at the same point, which is situated outside the chart.
 - Because at this mass it takes about 3 minutes to decelerate to the optimum speed for drift down at the original cruising level.
31. Which of the following statements is correct?
- An engine failure at high cruising altitude will always result in a drift down, because it is not permitted to fly the same altitude as with all engines operating.
 - When determining the obstacle clearance during drift down, fuel dumping may be taken into account.
 - The drift down regulations require a minimum descent angle after an engine failure at cruising altitude.
 - The drift down procedure requires a minimum obstacle clearance of 35 ft.

32. The drift down requirements are based on:
- the actual engine thrust output at the altitude of engine failure.
 - the maximum flight path gradient during the descent.
 - the landing mass limit at the alternate.
 - the obstacle clearance during a descent to the new cruising altitude if an engine has failed.
33. If the level-off altitude is below the obstacle clearance altitude during a drift down procedure?
- fuel jettisoning should be started at the beginning of drift down.
 - the recommended drift down speed should be disregarded and it should be flown at the stall speed plus 10 kt.
 - fuel jettisoning should be started when the obstacle clearance altitude is reached.
 - the drift down should be flown with flaps in the approach configuration.
34. After engine failure the aeroplane is unable to maintain its cruising altitude. What is the procedure which should be applied?
- Emergency Descent Procedure.
 - ETOPS.
 - Long Range Cruise Descent.
 - Drift Down Procedure.
35. For this question use Figure 4.24 of CAP 698 Section 4. With regard to the drift down performance of the twin jet aeroplane, what is meant by “equivalent gross weight at engine failure”?
- The increment accounts for the higher fuel flow at higher temperatures.
 - The equivalent gross weight at engine failure is the actual gross weight corrected for OAT higher than ISA +10°C.
 - The increment represents fuel used before engine failure.
 - This gross weight accounts for the lower Mach number at higher temperatures.
36. ‘Drift down’ is the procedure to be applied:
- to conduct a visual approach if VASI is available.
 - after engine failure if the aeroplane is above the one engine out maximum altitude.
 - after cabin depressurization.
 - to conduct an instrument approach at the alternate.
37. In a twin engine jet aircraft with six passenger seats, and a maximum certified take off mass of 5,650 kg. What is the required en-route obstacle clearance, with one engine inoperative during drift down towards the alternate airport?
- 2,000ft
 - 1,500ft
 - 1,000ft
 - 50ft or half the wingspan

38. Below the optimum cruise altitude:
- The IAS for long range cruise increases continuously with decreasing altitude.
 - The Mach number for long range cruise decreases continuously with decreasing altitude.
 - The Mach number for long range cruise decreases continuously with an increasing mass at a constant altitude.
 - The Mach number for long range cruise increases continuously with decreasing mass at a constant altitude.
39. How does the long range cruise speed (LRC) change?
- LRC Mach Number decreases with decreasing altitude.
 - LRC Mach number decreases with increasing altitude.
 - LRC Indicated airspeed increases with increasing altitude.
 - LRC True airspeed decreases with increasing altitude.
40. If a flight is performed with a higher "cost index" at a given mass, which of the following will occur?
- A better maximum range
 - A higher cruise mach number
 - A lower cruise mach number
 - A better long range
41. The effect of flying at the Long Range Cruise Speed instead of the Maximum Range Cruise Speed is:
- Fuel flow is reduced and speed stability is improved.
 - Fuel flow is reduced and speed stability is reduced.
 - Fuel flow is increased and speed stability is improved.
 - Fuel flow is increased and speed stability is reduced.
42. An aircraft's descent speed schedule is 0.74 M / 250 KIAS. During the descent from 30,000ft to sea level, the angle of attack will:
- Decrease, then remain constant.
 - Increase, then remain constant.
 - Remain constant.
 - Decrease.
43. During a drift down following engine failure, what would be the correct procedure to follow?
- Begin fuel jettison immediately, commensurate with having required reserves at destination.
 - Do not commence fuel jettison until en-route obstacles have been cleared.
 - Descend in the approach configuration.
 - Disregard the flight manual and descend at $V_s + 10$ kts to the destination.

ANSWERS

1	B	21	A	41	C
2	C	22	C	42	A
3	C	23	D	43	A
4	A	24	B		
5	A	25	D		
6	B	26	B		
7	B	27	A		
8	D	28	C		
9	B	29	D		
10	A	30	D		
11	B	31	B		
12	A	32	D		
13	A	33	A		
14	B	34	D		
15	B	35	B		
16	B	36	B		
17	B	37	A		
18	C	38	B		
19	B	39	A		
20	C	40	B		

CHAPTER SEVENTEEN

CLASS A: LANDING

Contents

LANDING CONSIDERATIONS	447
LANDING CLIMB REQUIREMENTS	447
LANDING DISTANCE REQUIREMENTS JAR-OPS 1.515	449
RUNWAY SELECTION / DESPATCH RULES	449
PRESENTATION OF DATA.	449
QUESTIONS	451
ANSWERS	454

LANDING CONSIDERATIONS

The maximum mass for landing is the lesser of:

- the climb limit mass
- the field length limit mass
- the structural limit mass

LANDING CLIMB REQUIREMENTS

LANDING CLIMB (All engines operating CS 25.119)

- A gradient of not less than 3.2% with:
- All engines operating at the power available 8 seconds after initiation of movement of the thrust control from the minimum flight idle to the take off position
- Landing configuration.
- Aerodrome altitude.
- Ambient temperature expected at the time of landing.
- A climb speed which is:
 - not less than $1.13 V_{SR}$ (may be $1.15 V_{SR}$ for 4 engine aircraft if application of power results in significant reduction in stalling speed)
 - not less than V_{MCL}
 - not more than $1.23 V_{SR}$


DISCONTINUED APPROACH CLIMB (One engine inoperative. CS 25.121)

- A climb gradient not less than:
 - 2.1% for 2 engined aircraft
 - 2.4% for 3 engined aircraft
 - 2.7% for 4 engined aircraft
- With:
- The critical engine inoperative and the remaining engines at the available take-off thrust.
- Landing gear retracted
- Flaps approach configuration, provided that the approach flap V_s does not exceed 110% of landing flap V_s
- Aerodrome altitude
- Ambient temperature
- Speed: Normal approach speed but not greater than $1.41 V_{SR}$.

The more limiting of the landing climb and the approach gradient requirements will determine the maximum mass for altitude and temperature at the landing aerodrome. Figure 17.1 shows a typical presentation of this data.

DISCONTINUED APPROACH INSTRUMENT CLIMB. (JAR-OPS 1.510)

For instrument approaches with decision heights below 200ft, an operator must verify that the approach mass of the aeroplane, taking into account the take-off mass and the fuel expected to be consumed in flight, allows a missed approach gradient of climb, with the critical engine failed and with the speed and configuration used for go-around of at least 2.5%, or the published gradient, whichever is the greater.

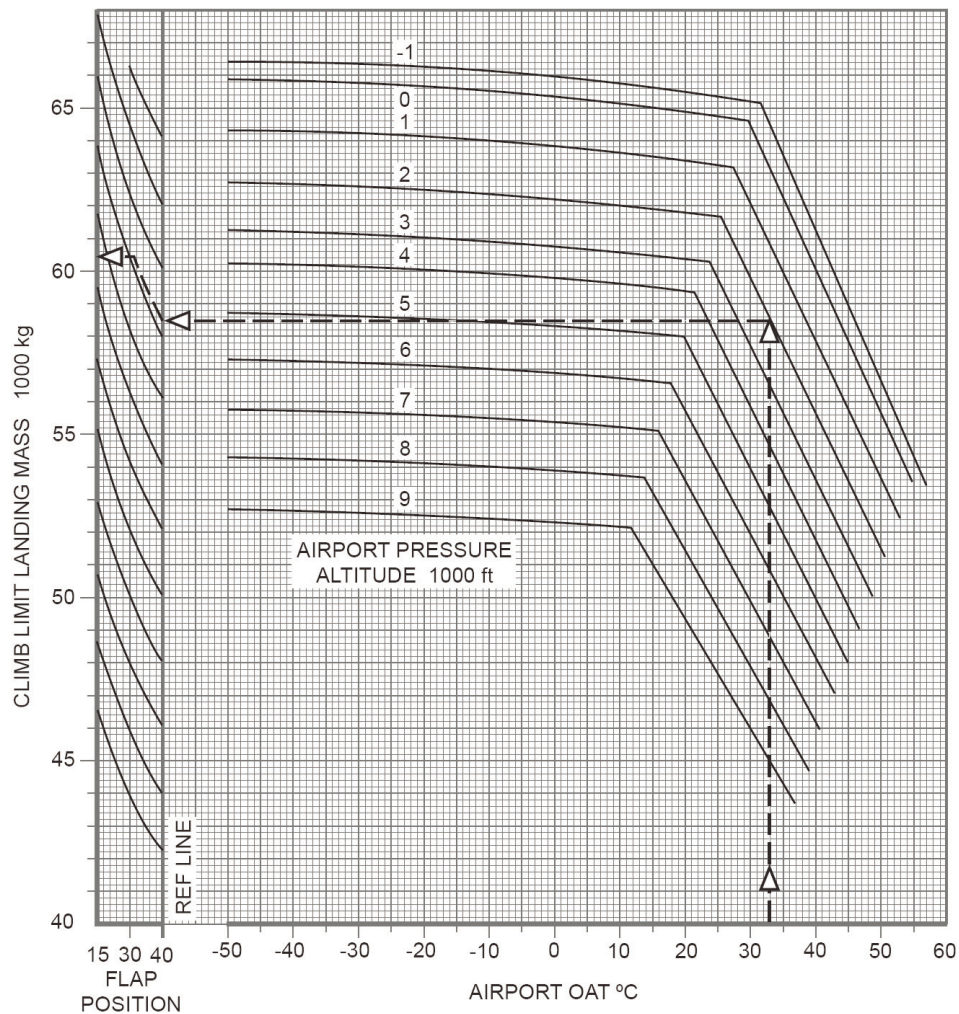

BASED ON A/C AUTO. FOR PACKS OFF INCREASE:
 THE FLAPS 40 ALLOWABLE MASS BY 1250 kg,
 THE FLAPS 30 ALLOWABLE MASS BY 1310 kg, OR
 THE FLAPS 15 ALLOWABLE MASS BY 1440 kg

IF OPERATING IN ICING CONDITIONS DURING ANY PART OF THE FLIGHT WHEN THE FORECAST
 LANDING TEMPERATURE IS BELOW 8°C:
 REDUCE THE FLAPS 40 CLIMB LIMIT MASS BY 4830 kg,
 REDUCE THE FLAPS 30 CLIMB LIMIT MASS BY 4730 kg, OR
 REDUCE THE FLAPS 15 CLIMB LIMIT MASS BY 4960 kg

FOR ANTI-ICE OPERATION, DECREASE ALLOWABLE MASS BY THE AMOUNT SHOWN IN THE
 TABLE BELOW

ANTI-ICE OPERATION DECREMENT kg		
FLAPS	ENGINE ONLY	ENGINE & WING
15	650	5800
30	600	5350
40	550	5250

* NOTE:
 ANTI-ICE BLEED SHOULD
 NOT BE USED ABOVE 10°C

Figure 17.1. Landing Performance Climb Limit

LANDING DISTANCE REQUIREMENTS JAR-OPS 1.515

The landing distance required on a dry runway for destination and alternate aerodromes, from 50 ft to a full stop must not exceed:

- 60% of the Landing Distance Available for turbo-jet aeroplanes
- 70% of the Landing Distance Available for turbo-prop aeroplanes

(Short landing and steep approach procedures may be approved based on lower screen heights, but not less than 35 ft)

The landing distance required is based on:

- the aeroplane in the landing configuration
- the speed at 50ft not less than $1.23 V_{SR}$
- aerodrome pressure altitude
- standard day temperature (ISA)
- factored winds (50% headwind, 150% tailwind)
- the runway slope if greater than $\pm 2\%$

RUNWAY SELECTION / DESPATCH RULES

Landing must be considered both in still air and in the forecast wind.

- a. Still air: The most favourable runway in still air may be selected.
- b. Forecast wind: The runway most likely to be used in the forecast wind.

The lower of the two masses obtained from a. and b. above must be selected as the limiting mass for the field lengths available.

NON COMPLIANCE

- If the still air requirement cannot be met at an aerodrome with a single runway, that is, landing can only be made if there is an adequate wind component, the aircraft may be dispatched if 2 alternate aerodromes are designated at which full compliance is possible.
- If the forecast wind requirement cannot be met, the aeroplane may be dispatched if an alternate is designated at which all the landing requirements are met.

WET RUNWAYS

If the runway is forecast to be wet at the estimated time of arrival the Landing Distance Available must be at least 115% of the dry runway landing distance required. However, a lesser factor may be used so long as it is published in the Aeroplane Flight Manual and the authority has approved such a factor.

PRESENTATION OF DATA

The example graph in figure 17.2 can be found in CAP 698 on page 46 of section 4. Work through the example shown in the graph which is detailed on page 40 of section 4. Practice by using the questions at the end of the chapter and remember that you will need to work through these graphs both in the normal way as illustrated by the arrow heads in the example, but also in reverse.

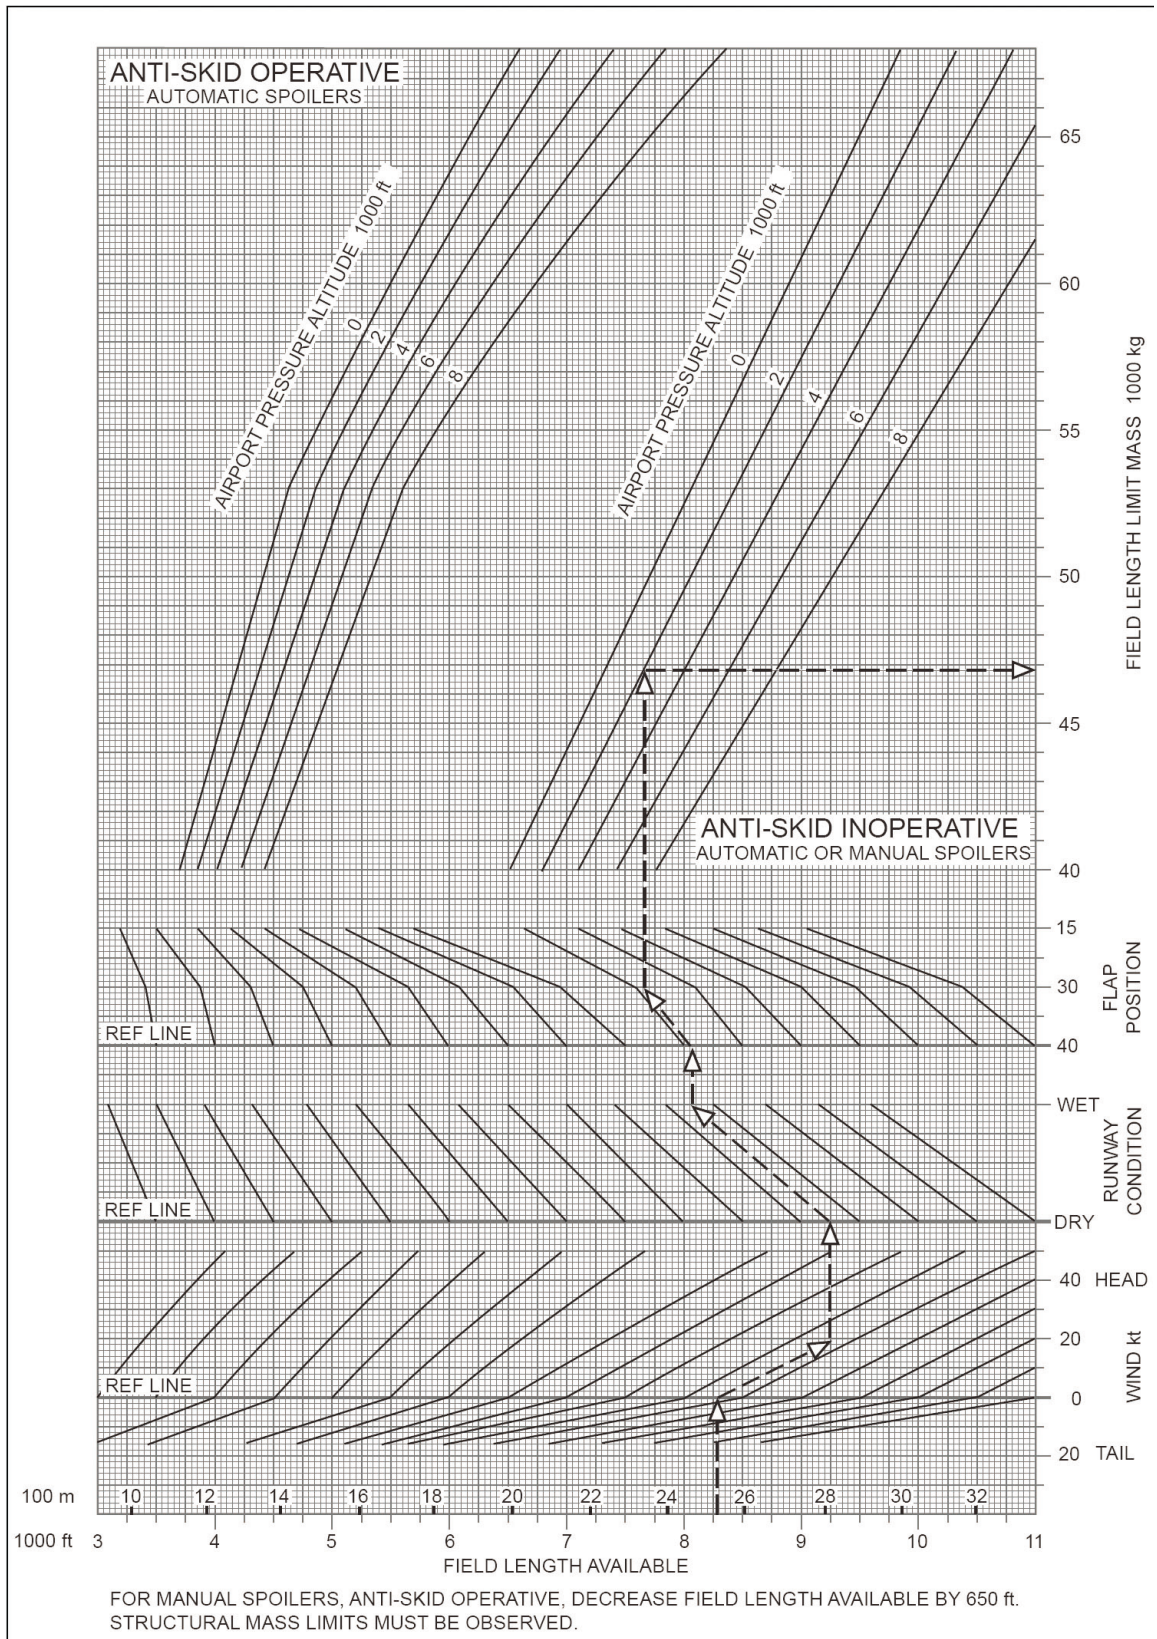


Figure 17.2 shows a typical presentation of landing distance data.

QUESTIONS

1. The approach climb requirement has been established to ensure:
 - a. minimum climb gradient in case of a go-around with one engine inoperative.
 - b. obstacle clearance in the approach area.
 - c. manoeuvrability in case of landing with one engine inoperative.
 - d. manoeuvrability during approach with full flaps and gear down, all engines operating.

2. The maximum mass for landing could be limited by:
 - a. the climb requirements with all engines in the landing configuration but with gear up.
 - b. the climb requirements with one engine inoperative in the approach configuration.
 - c. the climb requirements with one engine inoperative in the landing configuration.
 - d. the climb requirements with all engines in the approach configuration.

3. Which of the following is true according to JAA regulations for turbo propeller powered aeroplanes not performing a steep approach?
 - a. Maximum Take-off Run is 0.5 x runway length.
 - b. Maximum use of clearway is 1.5 x runway length.
 - c. Maximum Landing Distance at the destination aerodrome and at any alternate aerodrome is 0.7 x LDA (Landing Distance Available).
 - d. Maximum Landing Distance at destination is 0.95 x LDA (Landing Distance Available).

4. For a turboprop powered aeroplane, a 2,200 m long runway at the destination aerodrome is expected to be "wet". To ensure the wet landing distance meets the requirement, the "dry runway" landing distance should not exceed:
 - a. 1,540 m.
 - b. 1,147 m.
 - c. 1,339 m.
 - d. 1,771 m.

5. A flight is planned with a turbojet aeroplane to an aerodrome with a landing distance available of 2,400 m. Which of the following is the maximum landing distance for a dry runway?
 - a. 1 437 m.
 - b. 1 250 m.
 - c. 1 090 m.
 - d. 1 655 m.

6. The maximum mass for landing could be limited by:
 - a. the climb requirements with all engines in the landing configuration but with gear up.
 - b. the climb requirements with one engine inoperative in the approach configuration.
 - c. the climb requirements with one engine inoperative in the landing configuration.
 - d. the climb requirements with all engines in the approach configuration.

7. According to JAR-OPS 1, which one of the following statements concerning the landing distance for a turbojet aeroplane is correct?
- The landing distance is the distance from 35 ft above the surface of the runway to the full stop.
 - When determining the maximum allowable landing mass at destination, 60% of the available landing runway length should be taken into account.
 - Reverse thrust is one of the factors always taken into account when determining the landing distance required.
 - Malfunctioning of an anti-skid system has no effect on the required runway length.
8. By what factor must the landing distance available (dry runway) for a turbojet powered aeroplane be multiplied to find the maximum landing distance?
- 1.15
 - 1.67
 - 60/115
 - 0.60
9. The landing field length required for jet aeroplanes at the alternate in wet conditions is the demonstrated landing distance plus:
- 92%
 - 43%
 - 70%
 - 67%
10. The landing field length required for turbojet aeroplanes at the destination in wet condition is the demonstrated landing distance plus:
- 67%
 - 70%
 - 43%
 - 92%
11. For a turbojet aeroplane, what is the maximum landing distance for wet runways when the landing distance available at an aerodrome is 3,000 m?
- 2 070 m.
 - 1,562 m.
 - 1,800 m.
 - 2,609 m.
12. If the airworthiness documents do not specify a correction for landing on a wet runway; the landing distance must be increased by:
- 10 %
 - 20 %
 - 15 %
 - 5 %

13. Required runway length at destination airport for turboprop aeroplanes:
- is the same as at an alternate airport.
 - is less than at an alternate airport.
 - is more than at an alternate airport.
 - is 60% longer than at an alternate airport.
14. For this question use Figure 4.28 in CAP 698 Section 4.
What is the minimum field length required for the worst wind situation, landing a twin jet aeroplane with the anti-skid inoperative?
- Elevation: 2000 ft
QNH: 1013 hPa
Landing mass: 50,000 kg
Flaps: as required for minimum landing distance
Runway condition: dry
Wind: Maximum allowable tailwind: 15 kt
Maximum allowable headwind: 50 kt
- 2600 m.
 - 2700 m.
 - 2900 m.
 - 3100 m.
15. Compared to the landing distance available, the maximum landing distance for a turbo-propeller and turbojet aircraft are:
- 60%, 60%
 - 70%, 70%
 - 70%, 60%
 - 60%, 70%
16. The landing climb gradient limit mass is determined by:
- A gradient of 3.2% with one engine inoperative, the other engines at take off power in the landing configuration.
 - A gradient of 3.2% with all engines operating at take off power, in the landing configuration.
 - A gradient of 2.1% with all engines operating at take off power, with landing gear retracted, and approach flap.
 - A gradient of 3.2% with all engines operating at take off power, with landing gear retracted and approach flap.

ANSWERS

- | | | | |
|-----|---|-----|---|
| 1. | A | 11. | B |
| 2. | B | 12. | C |
| 3. | C | 13. | A |
| 4. | C | 14. | D |
| 5. | A | 15. | C |
| 6. | B | 16. | B |
| 7. | B | | |
| 8. | D | | |
| 9. | A | | |
| 10. | D | | |

CHAPTER EIGHTEEN

REVISION QUESTIONS

Contents

QUESTIONS457
ANSWERS486
SPECIMEN EXAMINATION PAPER487
ANSWERS TO SPECIMEN EXAMINATION PAPER494
EXPLANTIONS TO ANSWERS – SPECIMEN EXAM PAPER495

QUESTIONS

1. What happens to the speed for V_x and V_y with increasing altitude?
 - a. Both remain constant.
 - b. V_x remains constant and V_y increases.
 - c. V_x increases and V_y remains constant.
 - d. V_x remains constant and V_y decreases.

2. The affect of a contaminated runway on the field limit mass :
 - a. Decreased weight, increased V_1 , increased V_R .
 - b. Decreased weight, same V_1 , increased V_R .
 - c. Decreased weight, same V_1 , same V_R .
 - d. Decreased weight, decreased V_1 , decreased V_R .

3. When operating with anti-skid inoperative:
 - a. Both landing and take off performance will be affected.
 - b. Only landing performance will be affected.
 - c. Only take off performance will be affected.
 - d. Neither take off or landing performance will be affected.

4. When comparing V_x to V_y :
 - a. V_x will always be greater than V_y .
 - b. V_y will always be greater than or equal to V_x .
 - c. V_y will always be greater than V_x .
 - d. V_x will sometimes be greater than V_y , but sometimes be less than V_y .

5. Referring to Fig. 4.24. Why does the curve for an equivalent weight of 35 000 kg, only start 4 mins after engine failure?
 - a. All the curves start at the same point higher up.
 - b. At that altitude the engine takes longer to spool down after failure.
 - c. At that weight the aircraft has a higher TAS and therefore more momentum.
 - d. At that weight the aircraft takes longer to slowdown to the optimum drift down speed.

6. With which conditions would one expect V_{mc} to be the lowest?
 - a. Cold temp, low altitude, low humidity.
 - b. Hot temp, low pressure altitude, high humidity.
 - c. Hot temp, high pressure altitude, high humidity.
 - d. Cold temp, high altitude, low humidity.

7. Give the correct order for the following:
 - a. V_{mcg} , V_R , V_1 , V_2
 - b. V_{mcg} , V_1 , V_R , V_2
 - c. V_1 , V_{mcg} , V_R , V_2
 - d. V_{mcg} , V_1 , V_{mca} , V_R , V_2

8. If the C of G moves aft from the most forward position:
- The range and the fuel consumption will increase.
 - The range and the fuel consumption will decrease.
 - The range will increase and the fuel consumption will decrease.
 - The range will decrease and the fuel consumption will increase.
9. Descending below the tropopause from FL370 to FL250 at a steady M#, then FL250 to FL100 at a constant CAS. What happens to descent angle?
- Increase Increase
 - Increase Constant
 - Decrease Decrease
 - Constant Constant
10. With a constant weight and M#, a higher altitude will require:
- Lower CL.
 - Lower CD.
 - Higher AoA.
 - No change.
11. When approaching a wet runway, with the risk of hydroplaning, what technique should the pilot adapt?
- Positive touch down, full reverse and brakes as soon as possible.
 - Smoothest possible touch down, full reverse and only brakes below VP.
 - Positive touch down, full reverse and only brakes below VP.
 - Normal landing, full reverse and brakes at VP.
12. An aircraft with a grad of 3.3%, flying at an IAS of 85 KTS. At a P.ALT of 8500' with a temp of +15°C will have a ROC of:
- 284'/Min
 - 623'/Min
 - 1117'/Min
 - 334'/Min
12. An aircraft with a mass of 110000kg is capable of maintaining a grad of 2.6%. With all the atmospheric variables remaining the same, with what mass would it be able to achieve a grad of 2.4?
- 119167 kg
 - 101530 kg
 - 110000 kg
 - 121167 kg
14. Give the correct sequence:
- Vs, Vx, Vy
 - Vx, Vs, Vy
 - Vs, max range speed, max endurance speed.
 - Max endurance speed, Vs, Max range speed.

15. Flying at an altitude close to coffin corner gives:
- Max speed.
 - Less manoeuvrability.
 - Greater 1 engine inoperative Range.
 - Greater 1 engine inoperative Endurance.
16. The main reason for using the stepped climb technique is to:
- Decrease sector times.
 - Increase endurance.
 - Adhere to ATC procedures.
 - Increase range.
17. Ignoring the effect of compressibility, what would CL do with an increase in altitude?
- Increase.
 - Decrease.
 - Remain the same.
 - Increase, then decrease.
18. In climb limited mass calculations, the climb gradient is a ratio of:
- Height gained over distance travelled through the air.
 - Height gained over distance travelled across the ground.
 - TAS over rate of climb.
 - TGS over rate of climb.
19. In a twin engined jet aircraft with six passenger seats, and a maximum certified take off mass of 5650kg. What is the required en-route obstacle clearance, with one engine inoperative during drift down towards the alternate airport?
- 2000ft
 - 1500ft
 - 1000ft
 - 50ft or half the wingspan
20. When does THRUST = DRAG?
- Climbing at a constant IAS.
 - Descending at a constant IAS.
 - Flying level at a constant IAS.
 - All of the above.
21. When take off mass is limited by VMBE, an increase in the uphill slope will:
- Have no affect.
 - Require a decrease in the mass.
 - Allow an increase in the mass.
 - Decrease the TODR.

22. SFC will:
- Increase if C of G is moved further forward of the C of P.
 - Decrease if C of G is moved further forward of the C of P.
 - Not be affected by C of G position.
 - Only be affected by C of G position, if it is behind the C of P.
23. Reference point zero refers to:
- Point where the aircraft lifts off the ground.
 - Point where the aircraft reaches V₂.
 - Point where the aircraft reaches 35ft.
 - Point where gear is selected up.
24. To maintain the same angle of attack and altitude at a higher gross weight an aeroplane needs:
- Less airspeed and same power.
 - Same airspeed.
 - More airspeed and less power.
 - More airspeed and more power.
25. The coefficient of lift may be increased by lowering the flaps or:
- Increase CAS.
 - Reduce nose up elevator trim.
 - Increase angle of attack.
 - Increase TAS.
26. An aircraft is certified to land with flaps at either 25 or 35 degrees of flap. If the pilot selects the higher setting there will be:
- Increased landing distance and reduced go-around performance.
 - Increased landing distance and improved go-around performance.
 - Reduced landing distance and improved go-around performance.
 - Reduced landing distance and reduced go-around performance.
27. Which conditions are most suited to a selection of lower flap for take off?
- Low airfield elevation, close obstacles, long runway, high temperature.
 - Low airfield elevation, no obstacles, short runway, low temperature.
 - High elevation, no obstacles short runway, low temperature.
 - High airfield elevations, distant obstacles, long runway, high ambient temperature.
28. During the certification of an aeroplane, the take off distance with all engines operating and the take off distance with one engine inoperative are
1547m
1720m
What is the distance used in the aircraft certification?
- 1547m
 - 1779m
 - 1720m
 - 1798m

29. V_2 MIN is determined by: (excluding V_{mca})
- 1.08VSR for 4 engine turboprops with 1.13VSR for 2 and 3 engined turboprops.
 - 1.2VS for all turbojets.
 - 1.2VSR for all turboprops and 1.15VSR for all turbojets.
 - 1.15Vs for all aeroplanes.
30. If the flap setting is changed from 10 degrees to 20 degrees V_2 will:
- Not change.
 - Decrease if not limited to V_{mca} .
 - Increase.
 - Increase or decrease depending on weight.
31. For a turbojet aeroplane the second segment of the climb begins when:
- Accelerating from V_2 to flap retraction speed begins.
 - Landing gear is fully retracted.
 - Flap retraction begins.
 - Flaps are fully retracted.
32. For a turbojet aeroplane the third segment of climb begins when:
- Acceleration to flap retraction speed begins (min 400ft).
 - Landing gear is fully retracted.
 - Acceleration from VLOF to V_2 begins.
 - Flaps are fully retracted.
33. The buffet onset boundary chart tells the pilot:
- Critical mach number for various masses and altitudes.
 - Values for low speed stall and mach buffet onset for various masses and altitudes.
 - Mach number for low speed buffet and shock buffet for various masses and altitudes.
 - Maximum operating MMO for various masses and altitudes.
34. Two identical turbojets are at the same altitude and same speed and have the same specific fuel consumption. Plane 1 weighs 130,000kg and fuel flow is 4,300kg/hr. If plane 2 weighs 115,000kg what is the fuel flow:
- 3804kg/hr
 - 4044kg/hr
 - 3364kg/hr
 - 3530kg/hr
35. The speed for minimum power required in a turbojet will be:
- Slower than the speed for minimum drag.
 - Faster than the speed for minimum drag.
 - Slower in a climb and faster in the decent.
 - Same as speed for minimum drag.

36. In wet conditions, what extra percentage over the dry gross landing distance must be available for a turbojet?
- 43%
 - 92%
 - 67%
 - 15%
37. In dry conditions, when landing at an alternate airport in a turbojet by what factor should the landing distance available be divided by to give landing distance?
- 0.6
 - 1.0
 - 1.67
 - 1.43
38. What landing distance requirements need to be met at an alternate airfield compared to a destination airfield for a turboprop?
- Less than destination.
 - More than destination.
 - Same as destination.
 - None applicable.
39. For a twin engined aircraft, which can use either 5 or 15 degrees flap setting, using MRJT fig 4.4 what is the maximum field limited take off mass:
- | | |
|-------------------|-------|
| Pressure Altitude | 7000' |
| OAT | -10°C |
| Length available | 2400m |
| Slope | Level |
| Wind | Calm |
- 55000kg
 - 56000kg
 - 44000kg
 - 52000kg
40. Absolute Ceiling is defined by:
- Altitude where theoretical rate of climb is zero.
 - Altitude at which rate of climb is 100fpm.
 - Altitude obtained when using lowest steady flight speed.
 - Altitude where low speed Buffet and high speed Buffet speeds are coincident.
41. VREF for a Class B aircraft is defined by:
- 1.3Vs
 - 1.2Vs
 - 1.3 Vmcl
 - 1.2 Vmcl

42. VR for a jet aircraft must be faster than, the greater of:
- 1.05 V_{mca} and V_1
 - V_{mca} and $1.1V_1$
 - V_{MBE} and V_1
 - V_1 and $1.1 V_{mca}$
43. Landing on a runway with 5mm wet snow will:
- Increase landing distance.
 - Decrease landing distance.
 - Not affect the landing distance.
 - Give a slightly reduced landing distance, due to increased impingement drag.
44. Take off on a runway with standing water, with a depth of 0.5cm. Compared to a dry runway, field length limited mass will:
- Increase, with a reduced V_1 .
 - Remain the same, with a reduced V_1 .
 - Decrease, with an increased V_1 .
 - Decrease, with a decreased V_1 .
45. A balanced field length is when:
- Distance taken to accelerate to V_1 and distance to stop are identical
 - TORA X 1.5
 - $V_1 = VR$
 - ASDA equals TODA
46. Increase ambient temperature will result in:
- Increased field length limited mass.
 - Decrease maximum brake energy limited mass.
 - Increase climb limited mass.
 - Increased obstacle limited mass.
47. Pitch angle during decent at a constant mach number will:
- Increase.
 - Decrease.
 - Increase at first then decrease.
 - Stay constant.
48. At maximum range speed in a turbojet the angle of attack is:
- Same as L/D max.
 - Less than L/D max.
 - Maximum.
 - More than L/D max.

49. If there is an increase in atmospheric pressure and all other factors remain constant, it should result in:
- Decreased take off distance and increased climb performance.
 - Increased take off distance and increased climb performance.
 - Decreased take off distance and decreased climb performance.
 - Increased take off distance and decreased climb performance.
50. Climbing to cruise altitude with a headwind will:
- Increase time to climb.
 - Decrease ground distance covered to climb.
 - Decreased time to climb.
 - Increased ground distance covered to climb.
51. Requirements for the third segment of climb are:
- Minimum acceleration altitude for one engine inoperative should be used.
 - There is no climb gradient requirement during acceleration phase.
 - Level acceleration with an equivalent gradient of 1.2%.
 - Legal minimum altitude for acceleration is 1500'.
52. If the calculations for an aeroplane of 3250lb indicate a service ceiling of 4000m, what will the service ceiling be when the actual take off mass is 3000lb?
- Higher.
 - Lower.
 - Higher or lower, more calculations will have to be done.
 - The same.
53. Why is there a requirement for an approach climb gradient?
- So that an aircraft falling below the glide path will be able to re-intercept it.
 - Adequate performance for a go-around in the event of an engine failure.
 - So that the aircraft will not stall when full flap is selected.
 - To maintain minimum altitude on the approach.
54. The drift down is a procedure applied:
- After aircraft depressurisation.
 - For a visual approach to a VASI.
 - For an instrument approach at an airfield without an ILS.
 - When the engine fails above the operating altitude for one engine inoperative.
55. A light twin engined aircraft is climbing from the screen height of 50ft, and has an obstacle 10,000m along the net flight path. If the net climb gradient is 10%, there is no wind and obstacle is 900m above the aerodrome elevation then what will the clearance be?
- The aircraft will not clear the object.
 - 85m
 - 100m
 - 115m

56. Take off run required for a jet aircraft, with one engine inoperative is:
- Brake release point to midpoint between VLOF and 35ft.
 - Brake release point to 35ft.
 - Brake release point to 15ft.
 - The same as for all engines.
57. A jet aircraft's maximum altitude is usually limited by:
- It's certification maximum altitude.
 - It's pressurisation maximum altitude.
 - The altitude at which low and high-speed buffet will occur.
 - Thrust limits.
58. With respect to en-route diversions (using drift down graph), if you believe that you will not clear an obstacle do you:
- Drift down to clearance height and then start to jettison fuel.
 - Jettison fuel from the beginning of the drift down.
 - Asses remaining fuel requirements, then jettison fuel as soon as possible.
 - Fly slight faster.
59. With respect to field length limit, fill in the blanks in the follow statement.
- "The distance to accelerate to _____, at which point an engine fails, followed by the reaction time of _____ and the ensuing deceleration to a full stop must be completed within the _____."
- VR, 2sec, TORA
 - V1, 2sec, ASDA
 - VEF, 2sec, TORA
 - VGO, 2sec, ASDA
60. How does the power required graph move with an increase in altitude?
- Straight up.
 - Straight down.
 - Up and to the right.
 - Straight across to the right.
61. What factors would cause V2 to be limited by Vmca?
- Flaps at high settings.
 - With high pressure.
 - With low temperature.
 - Combination of the above.
62. In a climb, at a constant IAS / Mach No. 300 kts / 0.78 M. What happens at the change over point (29 500 ft, ISA) ?
- Accelerate from the IAS to the Mach number, and therefore rate of climb will decrease.
 - No change in rate of climb since TAS remains constant.
 - Find that rate of climb would start to increase, because TAS starts to increase.
 - Find that rate of climb would start to decrease, because TAS would start to decrease.

63. If not V_{MBE} or V_{mcg} limited, what would V_1 be limited by ?
- V_2
 - V_{mga}
 - VR
 - VMU
64. What procedure is likely to require V_1 to be reduced ?
- Improved climb procedure.
 - Reduced thrust take off.
 - When ASDA is greater than TODA.
 - Take off with anti-skid inoperative.
65. Which of the following is not affected by a tailwind :
- Landing climb limit mass.
 - Obstacle limit mass.
 - VMBE.
 - Tyre speed limit mass.
66. When flying an aircraft on the back of the drag curve, maintaining a slower speed (but still faster than VS) would require :
- More flap.
 - Less thrust due to less parasite drag.
 - More thrust.
 - No change.
67. During certification test flights for a turbojet aeroplane, the measured take off runs from brake release to a point equidistant between the point at which VLOF is reached and the point at which the aeroplane is 35ft above the take off surface are:
- 1747 m with all engines operating.
1950 m with the critical engine failure recognised at V_1 , other factors remaining unchanged.
- What is the correct value of the Take off Run?
- 1747 m
 - 2243 m
 - 1950 m
 - 2009 m
68. Taking into account the following, what would be the minimum required head wind component for landing ? (Using fig 2.4 in the CAP 698.)
- Factored landing distance of 1300 ft.
ISA temperature at MSL.
Landing mass of 3200 lbs.
- 10 Kts
 - 5 Kts
 - 0 Kts
 - 15 Kts

69. Two identical aircraft at different masses are descending at idle thrust. Which of the following statements correctly describes their descent characteristics?
- There is no difference between the descent characteristics of the two aeroplanes.
 - At a given angle of attack, the heavier aeroplane will always glide further than the lighter aeroplane.
 - At a given angle of attack, the lighter aeroplane will always glide further than the heavier aeroplane.
 - At a given angle of attack, both the vertical and the forward speeds are greater for the heavier aeroplane.
70. When flying in a headwind, the speed for max range should be :
- slightly decreased.
 - slightly increased.
 - unchanged.
 - should be increased, or decreased depending on the strength of the wind.
71. VLO is defined as :
- Actual speed that the aircraft lifts off the ground.
 - Minimum possible speed that the aircraft could lift off the ground.
 - The maximum speed for landing gear operation.
 - The long range cruise speed.
72. When flying at the optimum range altitude, over time the :
- Fuel consumption gradually decreases.
 - Fuel consumption gradually increases.
 - Fuel consumption initially decreases then gradually increases.
 - Fuel consumption remains constant.
73. What happens to the field limited take off mass with runway slope ?
- It increases with a downhill slope.
 - It is unaffected by runway slope.
 - It decreases with a downhill slope.
 - It increases with an uphill slope.
74. For a given aircraft mass, flying with a cost index greater than zero set will result in :
- a cruise at a slower M# than the best range M# for a given altitude.
 - a cruise at the maximum endurance speed.
 - climb at the slowest safe speed, taking into account stall and speed stability.
 - a cruise at a faster M# than the M# giving best ANM/kg ratio for a given altitude.
75. Cruising with 1 or 2 engines inoperative at high altitude, compared to all engines operative cruise, range will :
- increase.
 - decrease.
 - not change.
 - decrease with 1 engine inoperative, and increase with 2 engines inoperative.

76. Taking into account the values given below, what would be the maximum authorised brake release mass ?

Flap :	<u>5°</u>	<u>10°</u>	<u>15°</u>
Field limited mass :	49 850 kg	52 500 kg	56 850 kg
Climb limited mass :	51 250 kg	49 300 kg	45 500 kg

- a. 56 850 kg
 b. 49 300 kg
 c. 49 850 kg
 d. 51 250 kg
77. A turbo-prop aircraft with a maximum all up mass in excess of 5700 kg, is limited to :
- a. 10° angle of bank up to 400 ft.
 b. 15° angle of bank up to 400 ft.
 c. 20° angle of bank up to 400 ft.
 d. 25° angle of bank up to 400 ft.
78. With regards to the optimum altitude during the cruise, the aircraft is :
- a. always flown at the optimum altitude.
 b. always flown 2000 ft below the optimum altitude.
 c. may be flown above or below the optimum altitude, but never at the optimum altitude.
 d. flown as close to the optimum altitude as ATC will allow.
79. A tailwind on take off will not affect :
- a. climb limit mass.
 b. obstacle clearance.
 c. field limit mass.
 d. VMBE
80. When climbing at a constant M# through the troposphere, TAS :
- a. increases.
 b. decreases.
 c. remains constant.
 d. increases then decreases.
81. Concerning landing gear, which factors limit take off performance ?
- a. Brake temperature.
 b. Wheel rate of rotation, brake energy.
 c. Tyre temperature.
 d. Brake wear.
82. In a glide (power off descent) if pitch angle is increased, glide distance will :
- a. increases.
 b. decrease.
 c. remain constant.
 d. depend on the aircraft.

83. With which conditions would the aircraft need to be flown, in order to achieve maximum speed?
- Thrust set for minimum drag.
 - Best lift - drag ratio.
 - Maximum thrust and maximum drag.
 - Maximum thrust and minimum drag.
84. If a jet engine fails during take off, before V1 :
- the take off can be continued or aborted.
 - the take off should be aborted.
 - the take off should be continued.
 - the take off may be continued if aircraft speed is, above VMCG and lies between VGO and VSTOP.
85. Up to which height in NADP 1 noise abatement procedure must V2 + 10-20 Kts be maintained ?
- 1500 ft.
 - 3000 ft.
 - 1000 ft.
 - 500 ft.
86. At MSL, in ISA conditions.
Climb gradient = 6 %
What would the climb gradient be if :
- P.Altitude 1000 ft
Temperature 17°C
Engine anti-ice on.
Wing anti-ice on.
(- 0.2 % engine anti-ice, - 0,1 % wing anti ice, ± 0.2 % per 1000 ft P.altitude, ± 0.1 % per 1°C ISA deviation)
- 5.1 %
 - 6.3 %
 - 3.8 %
 - 5.5 %
87. An aircraft with 180 minutes approval for ETOPS, must be :
- no more than 180 minutes from a suitable alternate, in still air, at the one engine inoperative TAS.
 - no more than 180 minutes from a suitable alternate, in still air, at the all engine TAS.
 - no more than 90 minutes from a suitable alternate, and 90 minutes from departure, at the one engine inoperative TAS
 - no more than 180 minutes from a suitable alternate, at the one engine inoperative TGS.
88. In a balanced turn load factor is dependant on :
- radius of turn and aircraft weight.
 - TAS and bank angle.
 - radius of turn and bank angle.
 - Bank angle only.

89. Putting in 16500 litres of fuel with an SG of 780 kg/m³, and writing 16500 kg of fuel on the load sheet will result in :
- TOD increasing and ASD decreasing, and the calculated V2 being too fast.
 - TOD and ASD decreasing, and the calculated V2 being too fast.
 - TOD and ASD remaining constant, if the calculated speeds are used.
 - TOD and ASD increasing, if the calculated speeds are used.
90. If V1 is found to be lower than VMCG, which of the following statements will be true?
- VMCG must be reduced to equal V1.
 - TOD will be greater than ASD.
 - ASD will be greater than TOD.
 - Take-off will not be permitted.
91. When gliding into a headwind airspeed should be :
- reduce airspeed to gust penetration speed.
 - the same as the max. range glide speed in still air.
 - lower than the max. range glide speed in still air.
 - higher than the max. range glide speed in still air.
92. How does the slush thickness affect the V1 reduction required ?
- Greater reduction if thicker.
 - Smaller reduction if thicker.
 - No affect if mass is reduced.
 - No affect at all.
93. Which denotes the stall speed in the landing configuration ?
- VSO.
 - VS1.
 - VS.
 - VS1G.
94. When in a gliding manoeuvre, in order to achieve maximum endurance the aircraft should be flown at :
- the speed for max. lift.
 - the speed for min. drag.
 - the speed for max. lift / drag.
 - the speed for min. power.
95. When descending below the optimum altitude at the long range cruise speed :
- Mach no. decreases.
 - TAS increases.
 - Mach no. remains constant.
 - Mach no. increases.

96. What does density altitude signify ?
- Pressure altitude.
 - Flight levels.
 - ISA altitude.
 - An accurate indication of aircraft and engine performance.
97. For a turbo-prop aircraft, the LDA at an aerodrome is 2200 m. If the conditions are indicated as wet, what would the equivalent dry LDA be ?
- 1451 m.
 - 1913 m.
 - 1538 m.
 - 1317 m.
98. During aircraft certification, the value of VMCG is found with nose wheel steering inoperative. This is because :
- Nose wheel steering does not affect VMCG.
 - VMCG must be valid in both wet and dry conditions.
 - Nose wheel steering does not work after an engine failure.
 - The aircraft may be operated even if the nose wheel steering is inoperative.
99. Referring to Fig 4.28.
What would the landing distance required be for a MRJT aircraft with anti-skid inoperative if:
Pressure altitude 2000 feet.
Mass 50 000 kg
Flaps for short field.
15 Kts Tailwind
Dry runway.
- 1700 m
 - 2500 m
 - 1900 m
 - 3100 m
100. Which is true regarding a balanced field ?
- Provides largest gap between net and gross margins.
 - Provides minimum field length required in the case of an engine failure.
 - Take off distance will always be more than stopping distance.
 - Distances will remain equal, even if engine failure speed is changed.
101. Climbing in the troposphere at a constant TAS :
- Mach no. increases.
 - Mach no. decreases.
 - CAS increases.
 - IAS increases.

102. When a MRJT aircraft descends at the maximum range speed :
- IAS increases.
 - CAS increases.
 - Mach no. decreases.
 - Mach no. increases.
103. What condition is found at the intersection of the thrust available and the drag curve :
- Un-accelerated flight in a climb.
 - Accelerated climb.
 - Un-accelerated level flight.
 - Accelerated level flight.
104. Out of the four forces acting on the aircraft in flight, what balances thrust in the climb ?
- Drag.
 - Weight
 - $W \sin \theta$
 - Drag + $W \sin \theta$
105. According to the information in a light aircraft manual, which gives two power settings for cruise, 65 % and 75 %. If you fly at 75 % in stead of 65 % :
- Cruise speed will be higher, fuel consumption will be higher.
 - Cruise speed will be the same, fuel consumption will be the same.
 - Cruise speed will be higher, fuel consumption will be lower.
 - Cruise speed will be higher, fuel consumption will be the same.
106. With a downward sloping runway :
- V1 will increase.
 - V1 will decrease.
 - VR will increase.
 - VR will decrease.
107. How is fuel consumption affected by the C of G position, in terms of ANM / kg?
- Increases with a forward C of G.
 - Decreases with a aft C of G.
 - Decreases with a forward C of G.
 - Fuel consumption is not affected by the C of G position.
108. Rate of Climb 1000 ft/min
TAS 198 kts
What is the aircraft's gradient ?
- 5.08 %
 - 3 %
 - 4 %
 - 4.98 %

109. The reduced thrust take off procedure may not be used when :
- Runway wet.
 - After dark.
 - Temperature varies by more than 10°C from ISA.
 - Anti-skid unserviceable.
110. If the maximum take off mass is limited by tyre speed, what affect would a down sloping runway have ?
- No affect.
 - Always increase the mass.
 - Only increase the mass if not limited by any other limitation.
 - Decrease the mass.
111. With an obstacle which is 160 m above the airfield elevation and 5000 m away from the end of the take off distance. (Screen height 50 ft) What would the obstacle clearance be with a gradient of 5% ?
- 105 m
 - 90 m
 - 250 m
 - 265 m
112. Prior to take off the brake temperature needs to be checked, because :
- they indicate the state of the fusible plugs.
 - if the brakes are already hot, they may fade / overheat during a RTO.
 - they would work better if they are warm.
 - they may need to be warmed up to prevent them from cracking during a RTO.
113. A turbo jet is flying at a constant M # in the cruise, how does SFC vary with OAT in Kelvin?
- Unrelated to T
 - Proportional to T
 - Proportional to 1/T
 - Proportional to 1/T²
114. If an aircraft has a stall speed of 100 Kts, what would the speed on short finals have to be ?
- 100 Kts
 - 115 Kts
 - 130 Kts
 - 120 Kts
115. When descending at a constant M #, which speed is most likely to be exceeded first ?
- Max operating speed.
 - MMO.
 - High speed buffet limit.
 - VMO.

116. What is meant by 'Equivalent weight' on the drift down profile graph ?
- Weight compensated for fuel reduction prior to engine failure.
 - Weight compensated for temperature of ISA +10°C and above.
 - Weight compensated for density at different heights.
 - Weight compensated for temperature at different heights.
117. What happens to the speeds, VX and VY, when lowering the aircraft's undercarriage ?
- VX increases, VY decreases.
 - VX decreases, VY decreases.
 - VX increases, VY increases.
 - VX decreases, VY increases.
118. Maximum Endurance :
- can be achieved in level unaccelerated flight with minimum fuel consumption.
 - can be achieved by flying at the best rate of climb speed in straight and level flight.
 - can be achieved in a steady climb.
 - can be achieved by flying at the absolute ceiling.
119. What factors affect descent angle in a glide ?
- Configuration and altitude.
 - Configuration and angle of attack.
 - Mass and attitude.
 - Mass and configuration.
120. What is meant by balanced field available ?
- TORA = TODA
 - ASDA = ASDR and TODA = TODR
 - TODA = ASDA
 - TORA = ASDA
121. For a piston-engined aeroplane at a constant altitude, angle of attack and configuration, an increased weight will require :
- more power but less speed.
 - more power and the same speed.
 - more power and more speed.
 - the same power but more speed.
122. In the climb an aircraft has a thrust to weight ratio of 1:4 and a lift to drag ratio of 12:1. While ignoring the slight difference between lift and weight in the climb, the climb gradient will be:
- 3.0 %
 - 8.3 %
 - 16.7 %
 - 3.3 %

123. Which of the following will not decrease the value of VS?
- The C of G in an aft position within the C of G envelope.
 - Increased altitude.
 - Decreased weight.
 - Increased flap setting.
124. All other factors being equal, the speed for minimum drag is:
- constant for all weights.
 - a function of density altitude.
 - proportional to weight.
 - a function of pressure altitude.
125. Taking into account the values given below, what would be the maximum authorised brake release mass with a 10 Kt tailwind?
- | | | | |
|----------------------|-----------|------------|------------|
| Flap : | <u>5°</u> | <u>10°</u> | <u>15°</u> |
| Field limited mass : | 49 850 kg | 52 500 kg | 56 850 kg |
| Climb limited mass : | 51 250 kg | 49 300 kg | 45 500 kg |
- Assume 370kg per Kt of tailwind.
- 56 850kg
 - 49 850kg
 - 52 500kg
 - 48 800kg
126. If a turn is commenced during the take off climb path :
- The load factor
 - The induced drag
 - The climb gradient
- | | | | |
|----|-----------|-----------|-----------|
| | (i) | (ii) | (iii) |
| a. | Increases | Decreases | Decreases |
| b. | Decreases | Increases | Increases |
| c. | Increases | Increases | Decreases |
| d. | Decreases | Decreases | Increases |
127. What effect does an increase in weight have on V1 ?
- It will cause it to increase.
 - It will cause it to decrease.
 - It will have no effect.
 - It will cause it to decrease by the same percentage as the weight increase.
128. VR for a Class A aeroplane must not be less than:
- 10 % above VMU.
 - 5 % above VMCA.
 - 5 % above VMCG.
 - 10 % above VMCA.

129. As speed is reduced from VMD to VMP :
- power required decreases and drag decreases.
 - power required decreases and drag increases.
 - power required increases and drag increases.
 - power required increases and drag decreases.
130. The maximum induced drag occurs at a speed of :
- VMD.
 - VMP.
 - VSO.
 - VATO.
131. Profile drag is :
- inversely proportional to the square root of the EAS.
 - directly proportional to the square of the EAS.
 - inversely proportional to the square of the EAS.
 - directly proportional to the square root of the EAS.
132. VMD for a jet aeroplane is approximately equal to :
- 1.3 VS.
 - 1.7 VS.
 - 1.6 VS.
 - 2.1 VS.
133. The best EAS / Drag ratio is approximately :
- 1.3 VMD.
 - 1.32 VMD.
 - 1.6 VMD.
 - 1.8 VMD.
134. The effect an increase of weight has on the value of stalling speed (IAS) is that VS .
- increases.
 - decreases.
 - remains constant.
 - increases or decreases, depending on the amount of weight increase.
135. Which one of the following statements is true concerning the effect of changes of ambient temperature on an aeroplane's performance, assuming all other performance parameters remain constant ?
- An increase will cause a decrease in the landing distance required.
 - An increase will cause a decrease in take off distance required.
 - A decrease will cause an increase in the climb gradient
 - A decrease will cause an increase in the take off ground run.

136. What percentages of the head wind and tail wind components are taken into account, when calculating the take off field length required ?
- 100% head wind and 100% tail wind.
 - 150% head wind and 50% tail wind.
 - 50% head wind and 100% tail wind.
 - 50% head wind and 150% tail wind.
137. For a turbo jet aircraft planning to land on a wet runway, the landing distance available :
- may be less than 15% greater than the dry landing distance if the flight manual gives specific data for a wet runway.
 - may be less than 15% greater than the dry landing distance if all reverse thrust systems are operative.
 - may be less than 15% greater than the dry landing distance if permission is obtained from the relevant aerodrome authority.
 - must always be at least 15% greater than the dry landing distance.
138. The effect of installing more powerful engines in a turbojet aircraft is :
- to increase the aerodynamic ceiling and increase the performance ceiling.
 - to decrease the aerodynamic ceiling and increase the performance ceiling.
 - to increase the performance ceiling but not affect the aerodynamic ceiling.
 - to decrease both the aerodynamic and the performance ceilings.
139. In relation to runway strength, the ACN :
- may not exceed 90% of the PCN.
 - may exceed the PCN by up to 10%.
 - may never exceed the PCN.
 - may exceed the PCN by a factor of 2.
140. An aerodrome has a clearway of 500m and a stopway of 200m. If the stopway is extended to 500m the effect will be :
- the maximum take off mass will increase, and V_1 will decrease.
 - the maximum take off mass will increase and V_1 will remain the same.
 - the maximum take off mass will remain the same and V_1 will increase.
 - the maximum take off mass will increase and V_1 will increase.
141. An aircraft is climbing at a constant power setting and a speed of V_X . If the speed is reduced and the power setting maintained the :
- Climb gradient will decrease and the rate of climb will increase.
 - Climb gradient will decrease and the rate of climb will decrease.
 - Climb gradient will increase and the rate of climb will increase.
 - Climb gradient will increase and the rate of climb will decrease.
142. An aircraft is climbing in a standard atmosphere above the tropopause at a constant Mach number :
- the IAS decreases and TAS remain constant.
 - the IAS and TAS remain constant.
 - the IAS decreases and TAS decreases.
 - the IAS remains constant and TAS increases.

143. An aircraft is climbing at a constant IAS, below the Mach limit. As height increases :
- drag decreases, because density decreases.
 - drag remains constant, but the climb gradient decreases.
 - drag increases, because TAS increases.
 - drag remains constant and the climb gradient remains constant.
144. Optimum altitude can be defined as :
- the highest permissible altitude for an aeroplane type.
 - the altitude at which an aeroplane attains the maximum specific air range.
 - the altitude at which the ground speed is greatest.
 - the altitude at which specific fuel consumption is highest.
145. If an aircraft is descending at a constant Mach number :
- the IAS will increase and the margin to low speed buffet will decrease.
 - the IAS will increase and the margin to low speed buffet will increase.
 - the IAS will decrease and the margin to low speed buffet will decrease.
 - the IAS will decrease and the margin to low speed buffet will increase.
146. For a given flight level, the speed range determined by the buffet onset boundary chart will decrease with :
- decreased weight.
 - decreased bank angle.
 - a more forward CG position.
 - increased ambient temperature.
147. Which of the following variables will not affect the shape or position of the drag vs. IAS curve, for speeds below MCRIT ?
- Aspect ratio.
 - Configuration.
 - Altitude.
 - Weight.
148. Which of the following would give the greatest gliding endurance ?
- Flight at VMD.
 - Flight at 1.32VMD.
 - Flight at the best CL / CD ratio.
 - Flight close to CL MAX.
149. The tyre speed limit is :
- V1 in TAS.
 - Max VLOF in TAS.
 - Max VLOF in ground speed.
 - V1 in ground speed.


150. What gives one the greatest gliding time?
- Being light.
 - A head wind.
 - A tail wind.
 - Being heavy.
151. For take off performance calculations, what is taken into account ?
- OAT, pressure altitude, wind, weight.
 - Standard temperature, altitude, wind, weight.
 - Standard altitude, standard temperature, wind, weight.
 - Standard temperature, pressure altitude, wind, weight.
152. Which 3 speeds are effectively the same for a jet aircraft ?
- ROC, Range, minimum Drag.
 - Range, Best angle of climb, minimum Drag.
 - Best angle of climb, minimum Drag, Endurance.
 - Best angle of climb, Range, Endurance.
153. The long range cruise speed is a speed that gives :
- a 1% increase in range and a decrease in IAS.
 - a 1% increase in TAS.
 - a 1% increase in IAS.
 - gives 99% of best cruise range, with an increase in IAS.
154. When an aircraft takes-off at the mass it was limited to by the TODA:
- the end of the runway will be cleared by 35ft following an engine failure just before V1.
 - the actual take-off mass equals the field length limited take-off mass.
 - the distance from BRP to V1 is equal to the distance from V1 to the 35ft screen.
 - the balanced take-off distance equals 115% of the all engine take-off distance.
155. Which of the following speeds give the maximum obstacle clearance in the climb?
- VY
 - 1.2VS1
 - VX
 - VFE
156. The tangent, from the origin to the Power required curve gives?
- Minimum Drag coefficient.
 - L/D Minimum
 - D/L Maximum
 - L/D Maximum

157. For a jet flying at a constant altitude, at the maximum range speed, what is the effect on IAS and Drag over time?
- Increase, Increases.
 - Decrease, Constant.
 - Constant, Decrease.
 - Decrease, Decrease.
158. If an aircraft descends at a constant Mach #, what will the first limiting speed be?
- Max operating speed.
 - Never exceed speed.
 - Max operating Mach #.
 - Shock stall speed.
159. For an aircraft gliding at it's best glide range speed, if AoA is reduced:
- glide distance will increase.
 - glide distance will remain unaffected.
 - glide distance will decrease.
 - glide distance will remain constant, if speed is increased.
160. If an aircraft's climb schedule was changed from 280 / 0.74 M to 290 / 0.74 M, what would happen to the change over altitude?
- It would remain unchanged.
 - It could move up or down, depending on the aircraft.
 - It will move down.
 - It will move up.
161. What happens to the cost index when flying above the optimum Long Range cruise speed?
- Cost index is not affected by speed.
 - Cost index will increase with increased speed.
 - Cost index will decrease with increased speed.
 - It all depends on how much the speed is changed by.
162. For an aircraft flying at the Long Range cruise speed, (i) Specific Range and (ii) Fuel to time ratio:
- (i) Decreases (ii) Increases
 - (i) Increases (ii) Increases
 - (i) Decreases (ii) Decreases
 - (i) Increases (ii) Decreases
163. By what percentage should V2 be greater than VMCA?
- 30%
 - 10%
 - 20%
 - 15%

164. If a turbo-prop aircraft has a wet LDA of 2200m, what would the equivalent dry landing distance allowed be?
- 1540m
 - 1148m
 - 1913m
 - 1339m
165. If a TOD of 800m is calculated at sea level, on a level, dry runway, with standard conditions and with no wind, what would the TOD be for the conditions listed below?
- 2000 ft Airfield elevation
QNH 1013.25mb
Temp. of 21°C
5 kts of tailwind
Dry runway with a 2% up slope.
- (Assuming: $\pm 20\text{m}/1000\text{ft}$ elevation, $+10\text{m}/1\text{kt}$ of reported tailwind, $\pm 5\text{m}/1^\circ\text{C}$ ISA deviation and the standard slope adjustments)
- 836m
 - 940m
 - 1034m
 - 1095m
166. At a constant mass and altitude, a lower airspeed requires:
- more thrust and a lower coefficient of lift.
 - less thrust and a lower coefficient of lift.
 - more thrust and a lower coefficient of drag.
 - a higher coefficient of lift.
167. On a piston engine aeroplane, with increasing altitude at a constant gross mass, angle of attack and configuration, the power required:
- decreases slightly because of the lower air density.
 - remains unchanged but the TAS increases.
 - increases but the TAS remains constant.
 - increases and the TAS increases.
168. Reduced take off thrust:
- can be used if the headwind component during take off is at least 10 kts.
 - can be used if the take off mass is higher than the performance limited take off mass.
 - is not recommended at very low temperatures.
 - has the benefit of improving engine life.
169. Reduced take off thrust:
- can only be used in daylight.
 - can't be used on a wet runway.
 - is not recommended when wind shear is expected on departure.
 - is not recommended at sea level.

170. May the anti-skid be considered in determining the take off and landing mass limits?
- Only landing.
 - Only take off.
 - Yes
 - No
171. Climb limited take-off mass can be increased by:
- Lower V2
 - Lower flap setting and higher V2
 - Lower VR
 - Lower V1
172. An operator shall ensure that the aircraft clears all obstacles in the net take-off flight path. The half-width of the Obstacle Accountability Area (Domain) at distance D from the end of the TODA is:
- $90\text{m} + (D / 0.125)$
 - $90\text{m} + (1.125 \times D)$
 - $90\text{m} + (0.125 \times D)$
 - $(0.125 \times D)$
173. The take-off performance for a turbo-jet aircraft using 10° Flap results in the following limitations:
- | | |
|----------------------------------|----------|
| Obstacle clearance limited mass: | 4 630 kg |
| Field length limited mass: | 5 270 kg |
- Given that it is intended to take-off with a mass of 5 000 kg, which of the following statements is true?
- With 5° flap the clearance limit will increase and the field limit will decrease.
 - With 15° flap both will increase.
 - With 5° flap both will increase.
 - With 15° flap the clearance limit will increase and the field limit will decrease.
174. Induced drag?
- Increases with increased airspeed.
 - Decreases with increased airspeed.
 - Independent of airspeed.
 - Initially increases and the decreases with speed.

175. Which of these graphs shows the relationship that thrust required has, with decreased weight?

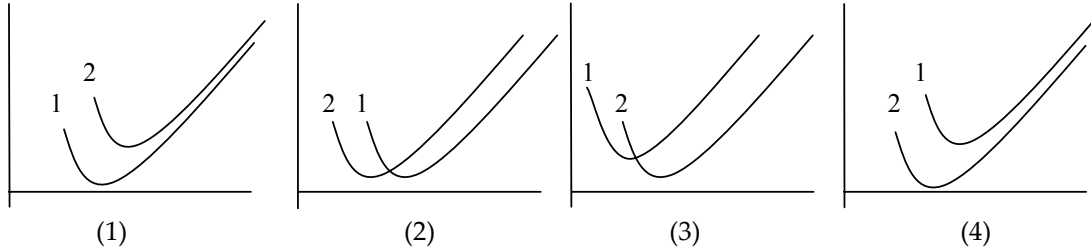

- a. 1
- b. 2
- c. 3
- d. 4

176. What is the formula for Specific Range?

- a. Ground speed divided by fuel flow.
- b. True airspeed divided by fuel flow.
- c. Fuel flow divided by SFC.
- d. Ground speed divided by SFC.

177. When does the first segment of the take-off climb begin?

- a. When V_2 is reached.
- b. When 35 feet is reached.
- c. When flaps are up.
- d. When gear and flaps are up.

178. A headwind component:

- a. increases climb angle.
- b. decreases climb angle.
- c. increases best rate of climb.
- d. decreases rate of climb.

179. V_1 is limited by:

- a. VMCG and VR.
- b. VMCA and VR.
- c. V_2 and VR.
- d. 1.05 VMCA.

180. VR is:

- a. less than V_1 .
- b. more than V_2 .
- c. less than VMCG.
- d. equal to or more than V_1 .

181. What is the affect of an increase in pressure altitude?
- increased take-off distance with increased performance.
 - decreased take-off distance and increased performance.
 - increased take-off distance and decreased performance.
 - decreased take-off distance with decreased performance.
182. What affects endurance?
- speed and weight.
 - speed and fuel on board.
 - speed, weight and fuel on board.
 - none of the above.
183. What degrades aircraft performance?
- low altitude, low temperature, low humidity.
 - high altitude, high temperature, high humidity.
 - low altitude, high temperature, low humidity.
 - high temperature, high altitude, low humidity.
184. If your take-off is limited by the climb limit mass, what is the effect of a headwind?
- No effect.
 - Increased mass.
 - Decreased mass.
 - Dependant on the strength of the headwind.
185. What is the effect on Accelerate Stop Distance of the Anti-Skid system being inoperative?
- Increased.
 - Decreased.
 - Constant.
 - Unable to be determined without further information.
186. What is V_{Ref} ?
- $1.3 V_S$
 - $1.13V_{SR0}$
 - $1.23V_{SR0}$
 - $1.05V_{mcl}$
187. During planning V_{mcg} is found to be greater than V_1 . If V_1 is adjusted to equal V_{mcg} and engine failure occurs at the new V_1 , then:
- ASDR is smaller than TODR.
 - ASDR is larger than TODR.
 - ASDR is the same as TODR.
 - The aircraft weight must be reduced in order to permit take off.

188. Refer to CAP698 Fig 2.1. What is the Gross TODR for an aircraft in the following conditions:

A/C TOM 1,591 kg
Field elevation 1,500ft (QNH 1013),
OAT is +18 Deg.C,
16 Kts Headwind Component,
1% downhill slope,
Paved, dry surface,
No stopway or clearway.

- a. 335m
- b. 744m
- c. 565m
- d. 595m

189. What is the Take Off Run defined as for a Class A aircraft:

- a. The distance from Brakes Release to V_{Lof} .
- b. The distance from Brakes Release to a point on the ground below which the aircraft has cleared a screen height of 35'.
- c. The distance from Brakes Release to a point on the ground below which the aircraft has cleared a screen height of 50'.
- d. The distance from Brakes Release to a point half way between where the aircraft leaves the ground and the point on the ground above which it clears a height of 35'.

190. Losing an engine during the take off above V_{mca} means the aircraft will be able to maintain:

- a. Altitude.
- b. Straight and level flight.
- c. Heading.
- d. Bank angle.

ANSWERS

1	D	41	A	81	B	121	C	161	B
2	D	42	A	82	B	122	C	162	A
3	A	43	A	83	C	123	B	163	B
4	B	44	D	84	B	124	C	164	D
5	D	45	D	85	B	125	D	165	C
6	C	46	B	86	A	126	C	166	D
7	B	47	B	87	A	127	A	167	D
8	C	48	B	88	D	128	B	168	D
9	B	49	A	89	B	129	B	169	C
10	C	50	B	90	C	130	C	170	C
11	C	51	C	91	D	131	B	171	B
12	D	52	A	92	B	132	C	172	C
13	A	53	B	93	A	133	B	173	A
14	A	54	D	94	D	134	A	174	B
15	B	55	D	95	A	135	C	175	D
16	D	56	A	96	D	136	D	176	B
17	C	57	C	97	B	137	A	177	B
18	A	58	C	98	B	138	C	178	A
19	A	59	B	99	D	139	B	179	A
20	C	60	C	100	B	140	D	180	D
21	C	61	D	101	A	141	B	181	C
22	A	62	D	102	C	142	A	182	C
23	C	63	C	103	C	143	B	183	B
24	D	64	D	104	D	144	B	184	A
25	C	65	A	105	A	145	B	185	A
26	D	66	C	106	B	146	C	186	C
27	A	67	D	107	C	147	C	187	B
28	B	68	A	108	D	148	D	188	D
29	A	69	D	109	D	149	C	189	D
30	B	70	B	110	A	150	A	190	C
31	B	71	C	111	A	151	A		
32	A	72	A	112	B	152	C		
33	C	73	A	113	B	153	D		
34	C	74	D	114	C	154	B		
35	A	75	B	115	D	155	C		
36	B	76	C	116	B	156	D		
37	A	77	B	117	B	157	D		
38	C	78	D	118	A	158	A		
39	B	79	A	119	B	159	C		
40	A	80	B	120	C	160	C		

SPECIMEN EXAMINATION PAPER

40 Questions, 40 Marks

Time Allowed: 1 hour

1. A turbo-propeller aircraft is certified with a maximum take-off mass of 5600 kg and a maximum passenger seating of 10. This aircraft would be certified in:
 - a. Class A
 - b. Class B
 - c. Class C
 - d. Either class A or class B depending on the number of passengers carried.(1 mark)
2. How does the thrust from a fixed propeller change during the take-off run of an aircraft?
 - a. It remains constant.
 - b. It increases slightly as the aircraft speed builds up.
 - c. It decreases slightly as the aircraft speed builds up.
 - d. It only varies with changes in mass.(1 mark)
3. The take-off run is defined as:
 - a. distance to V_1 and then to stop, assuming the engine failure is recognised at V_1
 - b. distance from brake release to the point where the aircraft reaches V_2
 - c. the horizontal distance from the start of the take-off roll to a point equidistant between V_{LOF} and 35 ft
 - d. the distance to 35 ft with an engine failure at V_1 or 1.15 times the all engine distance to 35 ft.(1 mark)
4. What effect does a downhill slope have on the take-off speeds?
 - a. It has no effect on V_1
 - b. It decreases V_1
 - c. It increases V_1
 - d. It increases the IAS for take-off(1 mark)
5. Which of the following combinations most reduces the take-off and climb performance of an aircraft?
 - a. high temperature and high pressure
 - b. low temperature and high pressure
 - c. low temperature and low pressure
 - d. high temperature and low pressure(1 mark)

6. Density altitude is:
- the true altitude of the aircraft
 - the altitude in the standard atmosphere corresponding to the actual conditions
 - the indicated altitude on the altimeter
 - used to calculate en-route safety altitudes
- (1 mark)
7. The take-off climb gradient:
- increases in a head wind and decreases in a tail wind
 - decreases in a head wind and increases in a tail wind
 - is independent of the wind component
 - is determined with the aircraft in the take-off configuration
- (1 mark)
8. The effect of changing altitude on the maximum rate of climb (ROC) and speed for best rate of climb for a turbo-jet aircraft, assuming everything else remains constant, is:
- as altitude increases the ROC and speed both decrease
 - as altitude increases the ROC and speed both increase
 - as altitude increases the ROC decreases but the speed remains constant
 - as altitude increases the ROC remains constant but the speed increases
- (1 mark)
9. A runway at an aerodrome has a declared take-off run of 3000 m with 2000 m of clearway. The maximum distance that may be allowed for the take-off distance is:
- 5000m
 - 6000 m
 - 3000 m
 - 4500 m
- (1 mark)
10. An aircraft may use either 5° or 15° flap setting for take off. The effect of selecting the 5° setting as compared to the 15° setting is:
- take-off distance and take-off climb gradient will both increase
 - take-off distance and take-off climb gradient will both decrease
 - take-off distance will increase and take-off climb gradient will decrease
 - take-off distance will decrease and take-off climb gradient will increase
- (1 mark)
11. The use of reduced thrust for take-off is permitted:
- if the field length limited take-off mass is greater than the climb limited take-off mass
 - if the actual take-off mass is less than the structural limiting mass
 - if the actual take-off mass is less than the field length and climb limited take-off masses
 - if the take-off distance required at the actual take-off mass does not exceed the take-off distance available
- (1 mark)

12. Planning the performance for a runway with no obstacles, it is found that the climb limiting take-off mass is significantly greater than the field limiting take-off mass with 5° flap selected. How can the limiting take-off mass be increased?
- use an increased V_2 procedure
 - increase the flap setting
 - reduce the flap setting
 - reduce the V_2
- (1 mark)
13. The maximum and minimum values of V_1 are limited by:
- V_R and V_{MCG}
 - V_2 and V_{MCG}
 - V_R and V_{MCA}
 - V_2 and V_{MCA}
- (1 mark)
14. If the TAS is 175 kt and the rate of climb 1250 ft per minute, the climb gradient is approximately:
- 7%
 - 14%
 - 12%
 - 10%
- (1 mark)
15. A pilot inadvertently selects a V_1 which is lower than the correct V_1 for the actual take-off weight. What problem will the pilot encounter if an engine fails above the selected V_1 but below the true V_1 ?
- the accelerate-stop distance required will exceed the distance available
 - the climb gradient will be increased
 - the take-off distance required will exceed that available
 - there will be no significant effect on the performance
- (1 mark)
16. A turbo-jet is in a climb at a constant IAS what happens to the drag?
- It increases
 - It decreases
 - it remains constant
 - it increases initially then decreases
- (1 mark)
17. Comparing the take-off performance of an aircraft from an aerodrome at 1000 ft to one taking off from an aerodrome at 6000 ft, the aircraft taking off from the aerodrome at 1000 ft:
- will require a greater take-off distance and have a greater climb gradient
 - will require a greater take-off distance and have a lower climb gradient
 - will require a shorter take-off distance and have a lower climb gradient
 - will require a shorter take-off distance and have a greater climb gradient
- (1 mark)

18. Which is the correct sequence of speed?
- $V_{S'} V_{Y'} V_X$
 - $V_{X'} V_{Y'} V_X$
 - $V_{S'} V_{X'} V_{Y'}$
 - $V_{X'} V_{Y'} V_S$
- (1 mark)
19. Which of the following will increase the accelerate-stop distance on a dry runway?
- a headwind component
 - an uphill slope
 - temperatures below ISA
 - low take-off mass, because of the increased acceleration
- (1 mark)
20. A turbo-jet aircraft is climbing at a constant Mach number in the troposphere. Which of the following statements is correct?
- TAS and IAS increase
 - TAS and IAS decrease
 - TAS decreases, IAS increases
 - TAS increases, IAS decreases
- (1 mark)
21. The induced drag in an aeroplane:
- increases as speed increases
 - is independent of speed
 - decreases as speed increases
 - decreases as weight decreases
- (1 mark)
22. The speed range between low speed and high speed buffet:
- decreases as altitude increases and weight decreases
 - decreases as weight and altitude increase
 - decreases as weight decreases and altitude increases
 - increases as weight decreases and altitude increases
- (1 mark)
23. Thrust equals drag:
- in unaccelerated level flight
 - in an unaccelerated descent
 - in an unaccelerated climb
 - in a climb, descent or level flight if unaccelerated
- (1 mark)

24. A higher mass at a given altitude will reduce the gradient of climb and the rate of climb. But the speeds:
- V_x and V_y will decrease
 - V_x and V_y will increase
 - V_x will increase and V_y will decrease
 - V_x and V_y will remain constant
- (1 mark)
25. If the other factors are unchanged the fuel mileage (nm per kg) is:
- independent from the centre of gravity (CofG)
 - lower with a forward CofG
 - lower with an aft CofG
 - higher with a forward CofG
- (1 mark)
26. Concerning maximum range in a turbo-jet aircraft, which of the following is true?
- the speed to achieve maximum range is not affected by the wind component
 - to achieve maximum range speed should be increased in a headwind and reduced in a tailwind
 - to achieve maximum range speed should be decreased in a headwind and increased in a tailwind
 - The change in speed required to achieve maximum range is dependent on the strength of the wind component acting along the aircraft's flight path and may require either an increase or decrease for both headwind and tailwind
- (1 mark)
27. V_1 is the speed:
- above which take-off must be rejected if engine failure occurs
 - below which take-off must be continued if engine failure occurs
 - engine failure recognised below this speed, take-off must be rejected and above which take-off must be continued
 - the assumed speed for engine failure
- (1 mark)
28. A constant headwind in the descent:
- Increases the angle of descent
 - Increases the rate of descent
 - Increases the angle of the descent flight path
 - Increases the ground distance travelled in the descent
- (1 mark)
29. For a turbojet aircraft what is the reason for the use of maximum range speed?
- Greatest flight duration
 - Minimum specific fuel consumption
 - Minimum flight duration
 - Minimum drag
- (1 mark)

30. Why are step climbs used on long range flights in jet transport aircraft?
- to comply with ATC flight level constraints
 - step climbs have no significance for jet aircraft, they are used by piston aircraft
 - to fly as close as possible to the optimum altitude as mass reduces
 - they are only justified if the actual wind conditions differ significantly from the forecast conditions used for planning
- (1 mark)
31. The absolute ceiling of an aircraft is:
- where the rate of climb reaches a specified value
 - always lower than the aerodynamic ceiling
 - where the rate of climb is theoretically zero
 - where the gradient of climb is 5%
- (1 mark)
32. In the take-off flight path, the net climb gradient when compared to the gross gradient is:
- greater
 - the same
 - smaller
 - dependent on aircraft type
- (1 mark)
33. To answer this question use CAP698 SEP1 figure 2.1. Conditions: aerodrome pressure altitude 1000 ft, temperature +30°C, level, dry, concrete runway and 5 kt tailwind component. What is the regulated take-off distance to 50 ft for an aircraft weight 3500 lb if there is no stopway or clearway?
- 2800 ft
 - 3220 ft
 - 3640 ft
 - 3500 ft
- (1 mark)
34. To answer this question use CAP698 MRJT figure 4.4. Conditions: Pressure altitude 5000 ft, temperature -5°C, balanced field length 2500 m, level runway, wind calm. What is the maximum field length limited take-off mass and optimum flap setting?
- 59400 kg 15°
 - 60200 kg 5°
 - 59400 kg, 5°
 - 60200 kg 15°
- (1 mark)
35. The effect of a headwind component on glide range:
- the range will increase
 - the range will not be affected
 - the range will decrease
 - the range will only be affected if incorrect speeds are flown
- (1 mark)

36. Refer to CAP398 MRJT figure 4.24. At a mass of 35000 kg, why does the drift down curve start at approximately 3 minutes at an altitude of 37000 ft?
- The origin of the curve lies outside the chart
 - At this altitude it takes longer for the engines to slow down, giving extra thrust for about 4 minutes
 - Because of inertia at the higher TAS it takes longer to establish the optimum rate of descent
 - It takes about this time to decelerate the aircraft to the optimum speed for drift down.
- (1 mark)
37. A twin engine turbo-jet aircraft having lost one engine must clear obstacles in the drift down by a minimum of:
- 35 ft
 - 1000 ft
 - 1500 ft
 - 2000 ft
- (1 mark)
38. The landing speed, V_{REF} for a single engine aircraft must be not less than:
- $1.2V_{MCA}$
 - $1.1V_{S0}$
 - $1.05V_{S0}$
 - $1.3V_{S0}$
- (1 mark)
39. What factor must be applied to the landing distance available at the destination aerodrome to determine the landing performance of a turbo-jet aircraft on a dry runway?
- 1.67
 - 1.15
 - 0.60
 - 0.70
- (1 mark)
40. An aircraft is certified to use two landing flap positions, 25° and 35°. If the pilot selects 25° instead of 35° then the aircraft will have:
- an increased landing distance and reduced go-around performance
 - an reduced landing distance and reduced go-around performance
 - an increased landing distance and increased go-around performance
 - an reduced landing distance and increased go-around performance
- (1 mark)

ANSWERS TO SPECIMEN EXAMINATION PAPER

1	A	21	C
2	C	22	B
3	C	23	A
4	B	24	B
5	D	25	B
6	B	26	B
7	C	27	C
8	A	28	C
9	D	29	B
10	A	30	C
11	C	31	C
12	B	32	C
13	A	33	D
14	A	34	D
15	C	35	C
16	C	36	D
17	D	37	D
18	C	38	D
19	B	39	C
20	B	40	C

EXPLANATIONS TO ANSWERS – SPECIMEN EXAM PAPER

- a. **The requirement for an aircraft to be certified in performance class B is that the maximum certified take-off mass must not exceed 5700kg AND the certified maximum number of passengers must not exceed 9. If both these conditions are not met then the aircraft will be certified in class A.**
1. c. As speed increases then the angle of attack and hence the thrust of the propeller decrease.
 2. c.
 3. b. With a downhill slope the effort required to continue acceleration after V_{EF} is less than the effort required to stop the aircraft because of the effect of gravity. Hence take-off can be achieved from a lower speed, but stopping the aircraft within the distance available can only be achieved from a lower speed.
 4. d. The lowest take-off performance will occur when air density is at its lowest, hence high temperature and low pressure.
 5. b. see definitions
 6. c. In determining take-off climb performance, the still air gradient is considered.
 7. a. As altitude increases the speed for best gradient of climb remains constant, but the speed for best rate of climb decreases until the two speed coincide at the absolute ceiling.
 8. d. TODA is limited by the lower of TORA plus clearway and $1.5 \times$ TORA.
 9. a. With a reduced flap setting the lift generated decreases and the stalling speed increases, so a greater take-off speed is required increasing the take-off distance. The reduced flap setting reduces the drag so the climb gradient increases.
 10. c. The use of reduced thrust means that the take-off distance will be increased and the climb gradient reduced, so neither of these can be limiting.
 11. b. Increasing the flap setting will reduce the TODR so the weight can be increased, but the climb gradient will reduce with the increased flap setting.
 12. a. see CAP698 page 62, paragraph 2.5.1.
 13. a. Gradient of climb can be approximated to rate of climb divided by TAS.
 14. c. The decision to continue the take-off will be made, but because the speed is below the normal V_L , the distance required to accelerate will be greater, so the TODA may well be exceeded.
 15. c. At a constant IAS drag will remain constant.
 16. d. The air density is greater at the lower aerodrome so the performance will be better in terms of acceleration and gradient.
 17. c. All speeds must be greater than V_s .

18. b. Although a uphill slope will enhance the deceleration, the effect on the acceleration to V_1 will result in increased distances.
19. b. Temperature is decreasing therefore the speed of sound and the TAS will decrease, and as altitude increases the IAS will also decrease.
20. c. As speed increases the induced drag reduces proportional to the square of the speed increase.
21. b. As altitude increases at a given weight the IAS for the onset of high speed buffet decreases and the IAS for the onset of low speed buffet remains constant, hence the speed range decreases. As weight increases at a given altitude the IAS for the onset of low speed buffet increases and there is a small decrease in the IAS for the onset of high speed buffet so once again the speed range decreases.
22. a. In the climb and descent an element of gravity acts along the aircraft axis either opposing (climb) or adding to (descent) the thrust, so only in level unaccelerated flight will the two forces be equal.
23. b. As altitude increases the speed for best gradient of climb remains constant but the speed for the best rate of climb decreases. (see Q8)
24. b. As the CofG moves forward the download on the tail increases, so the lift required also increases. To create the extra lift either speed or angle of attack must increase. In either case more thrust is required and the fuel required per nm will increase.
25. b. The speed for maximum range in a jet aircraft is found where the line from the origin is tangential to the drag curve. With a head wind the origin moves to the right by the amount of the wind component so the line from the origin will be tangential at a higher speed, and to the left with a tail wind giving a lower speed.
26. c. V_1 is the decision speed. If engine failure is recognised below V_1 take-off must be abandoned and engine failure recognised above V_1 take-off must be continued.
27. c. the rate of descent is independent of the wind, but the descent path is modified by the wind, the angle increasing with a head wind because of the reduced ground distance covered.
28. b. The maximum range speed is the speed at which the greatest distance can be flown, which means the lowest possible fuel usage. To achieve this implies we must have the lowest specific fuel consumption.
29. c. The most efficient way to operate a jet aircraft is to cruise climb, that is to set optimum cruise power and fly at the appropriate speed and allow the excess thrust as weight decreases to climb the aircraft.. For obvious safety reasons this is not possible, so the aircraft operates as close as possible to the optimum altitude by using the step climb technique.
30. c. The absolute ceiling is the highest altitude to which the aircraft could be climbed, where, at optimum climb speed, thrust = drag, so with no excess of thrust the rate (and gradient) of climb will be zero.
31. c. Net performance is gross (ie average) performance reduced by a regulatory amount to give a 'worst case' view. Therefore the worst case for the climb gradient will be a lower gradient than it is expected to achieve.

32. d. Gross take-off distance from the graph is 2800 ft. There is no stopway or clearway so the factor to apply is 1.25 to get the minimum TOR. (see CAP398, page 19)
33. d. The maximum take-off mass will be achieved with the higher flap setting because the take-off speeds will be reduced. As ever take care when using the graphs.
34. c. With a head wind component the glide performance will not be affected but the distance covered will reduce because of the reduced groundspeed.
35. d. The aircraft will be allowed to slow down to the optimum drift down speed before commencing descent which will take an amount of time dependent on weight and altitude.
36. d. This is the JAR regulatory requirement.
37. d. Again the JAR regulatory requirement.
38. c. The JAR regulatory requirement.
39. c. With a reduced flap setting the stalling speed and hence the V_{REF} will increase, so a greater landing distance will be required. With a reduced flap setting the drag will decrease, so the climb gradient will be better.

